



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**IEIT Systems Co., Ltd.**

**SPECSpeed®2017\_fp\_base = 266**

**NF5280M7 (Intel Xeon Silver 4516Y+)**

**SPECSpeed®2017\_fp\_peak = 266**

**CPU2017 License:** 3358


**Test Date:** Jun-2024

**Test Sponsor:** IEIT Systems Co., Ltd.

**Hardware Availability:** Dec-2023

**Tested by:** IEIT Systems Co., Ltd.

**Software Availability:** Dec-2023

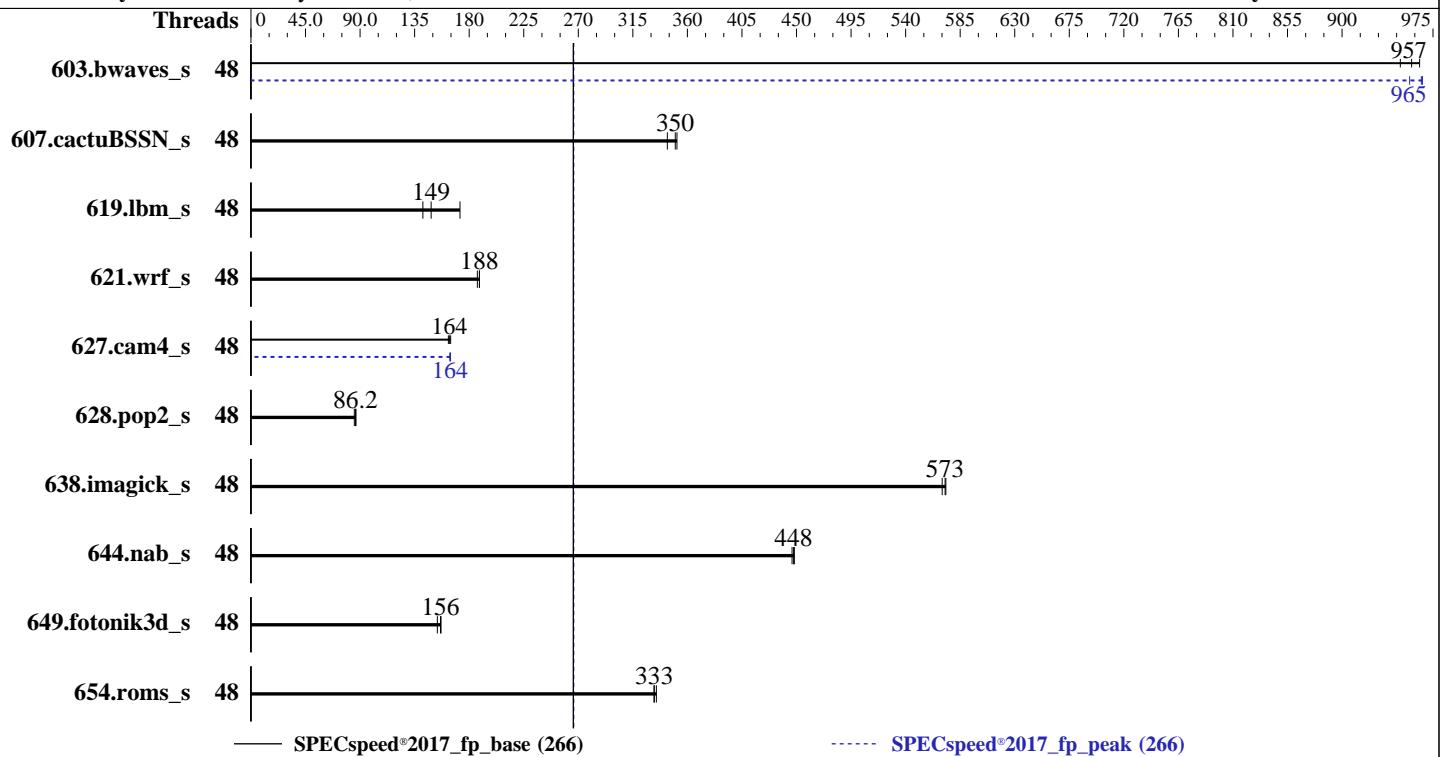

— SPECSpeed®2017\_fp\_base (266)

----- SPECSpeed®2017\_fp\_peak (266)

## Hardware

CPU Name: Intel Xeon Silver 4516Y+  
 Max MHz: 3700  
 Nominal: 2200  
 Enabled: 48 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 45 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 4400)  
 Storage: 1 x 1.92 TB NVME SSD  
 Other: CPU Cooling: Air

## Software

OS: SUSE Linux Enterprise Server 15 SP5 5.14.21-150500.53-default  
 Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: Version 05.13.00 released Nov-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**IEIT Systems Co., Ltd.**

**SPECSpeed®2017\_fp\_base = 266**

**NF5280M7 (Intel Xeon Silver 4516Y+)**

**SPECSpeed®2017\_fp\_peak = 266**

**CPU2017 License:** 3358

**Test Date:** Jun-2024

**Test Sponsor:** IEIT Systems Co., Ltd.

**Hardware Availability:** Dec-2023

**Tested by:** IEIT Systems Co., Ltd.

**Software Availability:** Dec-2023

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	48	61.2	964	62.2	948	<b>61.6</b>	<b>957</b>	48	<b>61.1</b>	<b>965</b>	61.1	966	61.7	956
607.cactuBSSN_s	48	<b>47.6</b>	<b>350</b>	47.4	351	48.5	343	48	<b>47.6</b>	<b>350</b>	47.4	351	48.5	343
619.lbm_s	48	36.9	142	<b>35.2</b>	<b>149</b>	30.4	172	48	36.9	142	<b>35.2</b>	<b>149</b>	30.4	172
621.wrf_s	48	<b>70.2</b>	<b>188</b>	70.8	187	70.2	188	48	<b>70.2</b>	<b>188</b>	70.8	187	70.2	188
627.cam4_s	48	54.4	163	53.8	165	<b>54.1</b>	<b>164</b>	48	<b>54.0</b>	<b>164</b>	54.0	164	53.8	165
628.pop2_s	48	139	85.2	137	86.6	<b>138</b>	<b>86.2</b>	48	139	85.2	137	86.6	<b>138</b>	<b>86.2</b>
638.imagick_s	48	<b>25.2</b>	<b>573</b>	25.3	570	25.2	573	48	<b>25.2</b>	<b>573</b>	25.3	570	25.2	573
644.nab_s	48	39.1	446	<b>39.0</b>	<b>448</b>	39.0	448	48	39.1	446	<b>39.0</b>	<b>448</b>	39.0	448
649.fotonik3d_s	48	58.1	157	59.3	154	<b>58.3</b>	<b>156</b>	48	58.1	157	59.3	154	<b>58.3</b>	<b>156</b>
654.roms_s	48	47.4	332	<b>47.3</b>	<b>333</b>	47.1	334	48	47.4	332	<b>47.3</b>	<b>333</b>	47.1	334
<b>SPECSpeed®2017_fp_base = 266</b>							<b>SPECSpeed®2017_fp_peak = 266</b>							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017\_fp\_base = 266

NF5280M7 (Intel Xeon Silver 4516Y+)

SPECspeed®2017\_fp\_peak = 266

CPU2017 License: 3358

Test Date: Jun-2024

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Dec-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2023

## Platform Notes

BIOS configuration:

ENERGY\_PERF\_BIAS\_CFG mode set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

Sub NUMA Cluster (SNC) set to Disable

Hyper Threading set to Disable

```
Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Jun 14 09:48:53 2024
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. tuned-adm active
  16. sysctl
  17. /sys/kernel/mm/transparent\_hugepage
  18. /sys/kernel/mm/transparent\_hugepage/khugepaged
  19. OS release
  20. Disk information
  21. /sys/devices/virtual/dmi/id
  22. dmidecode
  23. BIOS
- 

```
1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
09:48:53 up 0 min, 1 user, load average: 0.38, 0.12, 0.04
USER   TTY      FROM          LOGIN@    IDLE    JCPU   PCPU WHAT
root   tty1     -           09:48  13.00s  1.75s  0.01s sh
reportable-ic2024.0.2-lin-sapphirerapids-speed-smt-off-20231213.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size      (blocks, -c) unlimited
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**IEIT Systems Co., Ltd.**

**SPECSpeed®2017\_fp\_base = 266**

**NF5280M7 (Intel Xeon Silver 4516Y+)**

**SPECSpeed®2017\_fp\_peak = 266**

**CPU2017 License:** 3358

**Test Date:** Jun-2024

**Test Sponsor:** IEIT Systems Co., Ltd.

**Hardware Availability:** Dec-2023

**Tested by:** IEIT Systems Co., Ltd.

**Software Availability:** Dec-2023

## Platform Notes (Continued)

```

data seg size          (kbytes, -d) unlimited
scheduling priority   (-e) 0
file size             (blocks, -f) unlimited
pending signals       (-i) 4124642
max locked memory    (kbytes, -l) 64
max memory size      (kbytes, -m) unlimited
open files            (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues  (bytes, -q) 819200
real-time priority    (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes    (-u) 4124642
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

---

```

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
sh reportable-ic2024.0.2-lin-sapphirerapids-speed-smt-off-20231213.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2024.0.2-lin-sapphirerapids-speed-20231213.cfg --define cores=48 --tune base,peak -o all --define
    drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2024.0.2-lin-sapphirerapids-speed-20231213.cfg --define cores=48 --tune base,peak --output_format all
  --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
  --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017

```

---

```

6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) SILVER 4516Y+
vendor_id       : GenuineIntel
cpu family      : 6
model           : 207
stepping         : 2
microcode        : 0x21000161
bugs             : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrp_pbrsb
cpu cores        : 24
siblings          : 24
2 physical ids (chips)
48 processors (hardware threads)
physical id 0: core ids 0-23
physical id 1: core ids 0-23
physical id 0: apicids 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

---

7. lscpu

```

From lscpu from util-linux 2.37.4:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**IEIT Systems Co., Ltd.**

**SPECspeed®2017\_fp\_base = 266**

**NF5280M7 (Intel Xeon Silver 4516Y+)**

**SPECspeed®2017\_fp\_peak = 266**

**CPU2017 License:** 3358

**Test Date:** Jun-2024

**Test Sponsor:** IEIT Systems Co., Ltd.

**Hardware Availability:** Dec-2023

**Tested by:** IEIT Systems Co., Ltd.

**Software Availability:** Dec-2023

## Platform Notes (Continued)

Address sizes:	46 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	48
On-line CPU(s) list:	0-47
Vendor ID:	GenuineIntel
Model name:	INTEL(R) XEON(R) SILVER 4516Y+
CPU family:	6
Model:	207
Thread(s) per core:	1
Core(s) per socket:	24
Socket(s):	2
Stepping:	2
CPU max MHz:	3700.0000
CPU min MHz:	800.0000
BogoMIPS:	3800.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpf perf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cgqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cgqm_llc cgqm_occur_llc cgqm_mbm_total cgqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req hfi avx512vbm1 umip pku ospke waitpkg avx512_vbm2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxlptrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
L1d cache:	2.3 MiB (48 instances)
L1i cache:	1.5 MiB (48 instances)
L2 cache:	96 MiB (48 instances)
L3 cache:	90 MiB (2 instances)
NUMA node(s):	2
NUMA node0 CPU(s):	0-23
NUMA node1 CPU(s):	24-47
Vulnerability Itlb multihit:	Not affected
Vulnerability Llftf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW sequence
Vulnerability Srbds:	Not affected
Vulnerability Tsx sync abort:	Not affected

```
From lscpu --cache:
  NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
  L1d     48K     2.3M   12 Data        1      64          1           64
  L1i     32K     1.5M    8 Instruction  1      64          1           64
  L2      2M      96M   16 Unified      2    2048          1           64
  L3     45M     90M   15 Unified      3   49152          1           64
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017\_fp\_base = 266

NF5280M7 (Intel Xeon Silver 4516Y+)

SPECspeed®2017\_fp\_peak = 266

CPU2017 License: 3358

Test Date: Jun-2024

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Dec-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2023

## Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.  
available: 2 nodes (0-1)  
node 0 cpus: 0-23  
node 0 size: 515559 MB  
node 0 free: 514280 MB  
node 1 cpus: 24-47  
node 1 size: 515630 MB  
node 1 free: 514963 MB  
node distances:  
node 0 1  
0: 10 21  
1: 21 10

-----  
9. /proc/meminfo

MemTotal: 1055938960 kB

-----  
10. who -r  
run-level 3 Jun 14 09:48

-----  
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)  
Default Target Status  
multi-user running

-----  
12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nsqd nvmefc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyrd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once haveged haveged-switch-root ipmi ipmievfd issue-add-ssh-keys kdump kdump-early kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nvvmf-autoconnect rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned udisks2 vncserver@ wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
indirect	wickedd

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default  
root=UUID=0a76fdb6-6541-4f13-928e-2a3caa636f4c  
splash=silent  
resume=/dev/disk/by-uuid/e6a5bcc3-5591-4cd4-a737-ee6cc3cdc083  
mitigations=auto  
quiet  
security=apparmor  
crashkernel=447M,high  
crashkernel=72M,low

-----  
14. cpupower frequency-info

analyzing CPU 0:  
current policy: frequency should be within 800 MHz and 3.70 GHz.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017\_fp\_base = 266

NF5280M7 (Intel Xeon Silver 4516Y+)

SPECspeed®2017\_fp\_peak = 266

CPU2017 License: 3358

Test Date: Jun-2024

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Dec-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2023

## Platform Notes (Continued)

The governor "powersave" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

-----  
15. tuned-adm active

It seems that tuned daemon is not running, preset profile is not activated.  
Preset profile: throughput-performance

-----  
16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

-----  
17. /sys/kernel/mm/transparent\_hugepage

defrag	always defer defer+madvise [madvise] never
enabled	[always] madvise never
hpge_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

-----  
19. OS release

From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP5

-----  
20. Disk information

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p4	xfs	1.3T	117G	1.1T	10%	/home

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECSpeed®2017\_fp\_base = 266

NF5280M7 (Intel Xeon Silver 4516Y+)

SPECSpeed®2017\_fp\_peak = 266

CPU2017 License: 3358

Test Date: Jun-2024

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Dec-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2023

## Platform Notes (Continued)

21. /sys/devices/virtual/dmi/id  
Vendor: IEIT SYSTEMS  
Product: NF5280-M7-A0-R0-00  
Product Family: Not specified  
Serial: 0000000000

22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x Samsung M321R8GA0PB0-CWMKH 64 GB 2 rank 5600, configured at 4400  
8x Samsung M321R8GA0PB0-CWMXH 64 GB 2 rank 5600, configured at 4400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 05.13.00  
BIOS Date: 11/30/2023

## Compiler Version Notes

=====

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017\_fp\_base = 266

NF5280M7 (Intel Xeon Silver 4516Y+)

SPECspeed®2017\_fp\_peak = 266

CPU2017 License: 3358

Test Date: Jun-2024

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Dec-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2023

## Compiler Version Notes (Continued)

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-fsto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC\_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xsapphirerapids -Ofast  
-ffast-math -fsto -mfpmath=sse -funroll-loops

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECSpeed®2017\_fp\_base = 266

NF5280M7 (Intel Xeon Silver 4516Y+)

SPECSpeed®2017\_fp\_peak = 266

CPU2017 License: 3358

Test Date: Jun-2024

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Dec-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2023

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-qopt-mem-layout-trans=4 -fopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP -Wno-implicit-int  
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte  
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECSpeed®2017\_fp\_base = 266

NF5280M7 (Intel Xeon Silver 4516Y+)

SPECSpeed®2017\_fp\_peak = 266

CPU2017 License: 3358

Test Date: Jun-2024

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Dec-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2023

## Peak Optimization Flags (Continued)

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids
-Ofast -ffast-math -fsto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

```
627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -fsto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactubSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/IEIT-Platform-Settings-intel-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/IEIT-Platform-Settings-intel-V1.0.xml>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECSpeed®2017\_fp\_base = 266

NF5280M7 (Intel Xeon Silver 4516Y+)

SPECSpeed®2017\_fp\_peak = 266

CPU2017 License: 3358

Test Date: Jun-2024

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Dec-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2023

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-06-14 09:48:52-0400.

Report generated on 2024-07-17 11:44:49 by CPU2017 PDF formatter v6716.

Originally published on 2024-07-16.