



# SPEChpc™ 2021 Small Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

## Supermicro


SuperServer SYS-F511E2-RT (Intel Xeon Gold 5433N)

SPEChpc 2021\_sml\_base = 0.5545

SPEChpc 2021\_sml\_peak = Not Run

hpc2021 License: 6569  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Apr-2023  
Hardware Availability: Jan-2023  
Software Availability: Jan-2023

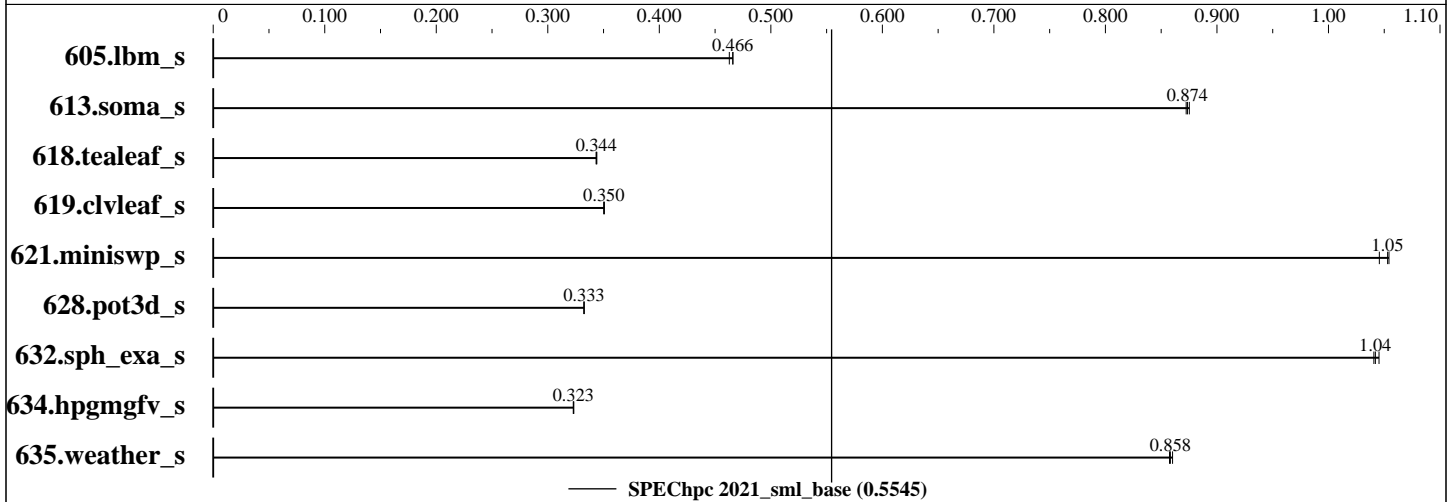

## Results Table

Benchmark	Base										Peak							
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
605.lbm_s	OMP	4	20	3326	0.466	<b><u>3327</u></b>	<b><u>0.466</u></b>	3349	0.463									
613.soma_s	OMP	4	20	1828	0.875	<b><u>1832</u></b>	<b><u>0.874</u></b>	1834	0.872									
618.tealeaf_s	OMP	4	20	<b><u>5968</u></b>	<b><u>0.344</u></b>	5970	0.343	5960	0.344									
619.clvleaf_s	OMP	4	20	4705	0.351	<b><u>4710</u></b>	<b><u>0.350</u></b>	4711	0.350									
621.miniswp_s	OMP	4	20	1043	1.05	<b><u>1045</u></b>	<b><u>1.05</u></b>	1052	1.05									
628.pot3d_s	OMP	4	20	5039	0.332	<b><u>5037</u></b>	<b><u>0.333</u></b>	5037	0.333									
632.sph_exa_s	OMP	4	20	2210	1.04	<b><u>2207</u></b>	<b><u>1.04</u></b>	2200	1.05									
634.hpgmgfv_s	OMP	4	20	<b><u>3018</u></b>	<b><u>0.323</u></b>	3020	0.323	3015	0.323									
635.weather_s	OMP	4	20	<b><u>3029</u></b>	<b><u>0.858</u></b>	3032	0.857	3023	0.860									

SPEChpc 2021\_sml\_base = 0.5545

SPEChpc 2021\_sml\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEChpc™ 2021 Small Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-F511E2-RT (Intel Xeon Gold 5433N)

SPEChpc 2021\_sml\_base = 0.5545

SPEChpc 2021\_sml\_peak = Not Run

**hpc2021 License:** 6569  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Apr-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Jan-2023

### Hardware Summary

Type of System: Homogenous  
Compute Node: SuperServer SYS-F511E2-RT  
Interconnect: Supermicro AOC-ATG-i2TM  
Compute Nodes Used: 4  
Total Chips: 4  
Total Cores: 80  
Total Threads: 160  
Total Memory: 2 TB  
Max. Peak Threads: --

### Software Summary

Compiler: C/C++/Fortran: Version 2023.0.0 of Intel oneAPI Compiler  
MPI Library: Version 2021.8.0 Build 20221129  
Other MPI Info: None  
Other Software: None  
Base Parallel Model: OMP  
Base Ranks Run: 4  
Base Threads Run: 20  
Peak Parallel Models: Not Run  
Minimum Peak Ranks: --  
Maximum Peak Ranks: --  
Max. Peak Threads: --  
Min. Peak Threads: --

## Node Description: SuperServer SYS-F511E2-RT

### Hardware

Number of nodes: 4  
Uses of the node: compute  
Vendor: Supermicro  
Model: SuperServer SYS-F511E2-RT  
CPU Name: Intel Xeon Gold 5433N  
CPU(s) orderable: 1 chip  
Chips enabled: 1  
Cores enabled: 20  
Cores per chip: 20  
Threads per core: 2  
CPU Characteristics: Intel Turbo Boost Technology up to 4.1 GHz  
CPU MHz: 1900  
Primary Cache: 32 KB I + 48 KB D on chip per core  
Secondary Cache: 2 MB I+D on chip per core  
L3 Cache: 37.5 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (8 x 64 GB 2Rx4 PC5-4800B-R)  
Disk Subsystem: 1 x 480 GB Micron M.2 NVMe SSD  
Other Hardware: None  
Accel Count: 0  
Accel Model: None  
Accel Vendor: None  
Accel Type: None  
Accel Connection: None  
Accel ECC enabled: None  
Accel Description: None  
Adapter: Supermicro AOC-ATG-i2TM  
Number of Adapters: 1  
Slot Type: Advanced I/O Module (AIOM) Form Factor  
Data Rate: 10 Gb/s  
Ports Used: 1

(Continued on next page)

### Software

Accelerator Driver: --  
Adapter: Supermicro AOC-ATG-i2TM  
Adapter Driver: None  
Adapter Firmware: None  
Operating System: SUSE Linux Enterprise Server 15 SP4  
Kernel 5.14.21-150400.22-default  
Local File System: xfs  
Shared File System: None  
System State: Multi-user, run level 3  
Other Software: None



# SPEChpc™ 2021 Small Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-F511E2-RT (Intel Xeon Gold 5433N)

SPEChpc 2021\_sml\_base = 0.5545

SPEChpc 2021\_sml\_peak = Not Run

**hpc2021 License:** 6569  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Apr-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Jan-2023

### Node Description: SuperServer SYS-F511E2-RT

#### Hardware (Continued)

Interconnect Type: AOC-ATG-i2TM

### Interconnect Description: Supermicro AOC-ATG-i2TM

#### Hardware

Vendor: None  
Model: Supermicro AOC-ATG-i2TM  
Switch Model: None  
Number of Switches: 1  
Number of Ports: 0  
Data Rate: 10 Gb/s  
Firmware: None  
Topology: None  
Primary Use: MPI Traffic, NFS Access

#### Software

: --

### Submit Notes

The config file option 'submit' was used.

```
mpiexec.hydra -bootstrap ssh -hostfile ${top}/hostfile -genv OMP_NUM_THREADS $threads -np $ranks -ppn $ppn $command
```

### General Notes

MPI startup command:

mpirun command (mpiexec.hydra) was used to start MPI jobs.

### Compiler Version Notes

```
=====  
CXXC 632.sph_exa_s(base)  
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler 2023.0.0 (2023.0.0.20221201)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/intel/oneapi/compiler/2023.0.0/linux/bin-llvm  
Configuration file:  
  /opt/intel/oneapi/compiler/2023.0.0/linux/bin-llvm/./bin/icpx.cfg  
-----
```

```
=====  
CC 605.lbm_s(base) 613.soma_s(base) 618.tealeaf_s(base) 621.miniswp_s(base)  
634.hpgmgfv_s(base)  
-----
```

(Continued on next page)



# SPEChpc™ 2021 Small Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-F511E2-RT (Intel Xeon Gold 5433N)

SPEChpc 2021\_sml\_base = 0.5545

SPEChpc 2021\_sml\_peak = Not Run

**hpc2021 License:** 6569  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Apr-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Jan-2023

### Compiler Version Notes (Continued)

```
Intel(R) oneAPI DPC++/C++ Compiler 2023.0.0 (2023.0.0.20221201)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/intel/oneapi/compiler/2023.0.0/linux/bin-llvm
Configuration file:
/opt/intel/oneapi/compiler/2023.0.0/linux/bin-llvm/./bin/icx.cfg
```

```
=====
FC 619.clvleaf_s(base) 635.weather_s(base)
-----
```

```
ifx (IFORT) 2023.0.0 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 628.pot3d_s(base)
-----
```

```
ifx: command line warning #10157: ignoring option '-W'; argument is of wrong
type
ifx (IFORT) 2023.0.0 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----
```

### Base Compiler Invocation

C benchmarks:  
mpiicc -cc=icx

C++ benchmarks:  
mpicpc -cxx=icpx

Fortran benchmarks:  
mpiifort -fc=ifx

### Base Portability Flags

```
605.lbm_s: -lstdc++
613.soma_s: -lstdc++
618.tealeaf_s: -lstdc++
619.clvleaf_s: -lstdc++
621.miniswp_s: -lstdc++
628.pot3d_s: -DSPEC_NO_REORDER -lstdc++
```

(Continued on next page)



# SPEChpc™ 2021 Small Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-F511E2-RT (Intel Xeon Gold 5433N)

SPEChpc 2021\_sml\_base = 0.5545

SPEChpc 2021\_sml\_peak = Not Run

**hpc2021 License:** 6569  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Apr-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Jan-2023

## Base Portability Flags (Continued)

632.sph\_exa\_s: -lstdc++  
634.hpgmgfv\_s: -lstdc++  
635.weather\_s: -lstdc++

## Base Optimization Flags

C benchmarks:

-Ofast -ipo -xCORE-AVX512 -mprefer-vector-width=512 -fiopenmp  
-ansi-alias

C++ benchmarks:

-Ofast -ipo -xCORE-AVX512 -mprefer-vector-width=512 -fiopenmp  
-ansi-alias

Fortran benchmarks:

619.clvleaf\_s: -Ofast -ipo -xCORE-AVX512 -mprefer-vector-width=512  
-fiopenmp -nostandard-realloc-lhs -align array64byte

628.pot3d\_s: -Ofast -ipo -xCORE-AVX512 -mprefer-vector-width=512  
-fiopenmp -nostandard-realloc-lhs -align array64byte  
-heap-arrays 32768

635.weather\_s: Same as 619.clvleaf\_s

## Base Other Flags

C benchmarks:

-Ispecmpitime

C++ benchmarks:

-Ispecmpitime

Fortran benchmarks:

619.clvleaf\_s: -Ispecmpitime

628.pot3d\_s: -Wno-incompatible-function-pointer-types

635.weather\_s: No flags used



# SPEChpc™ 2021 Small Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-F511E2-RT (Intel Xeon Gold 5433N)

SPEChpc 2021\_sml\_base = 0.5545

SPEChpc 2021\_sml\_peak = Not Run

**hpc2021 License:** 6569  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Apr-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Jan-2023

The flags file that was used to format this result can be browsed at  
[http://www.spec.org/hpc2021/flags/Intel\\_compiler\\_flags.2023-06-05.html](http://www.spec.org/hpc2021/flags/Intel_compiler_flags.2023-06-05.html)

You can also download the XML flags source by saving the following link:  
[http://www.spec.org/hpc2021/flags/Intel\\_compiler\\_flags.2023-06-05.xml](http://www.spec.org/hpc2021/flags/Intel_compiler_flags.2023-06-05.xml)

SPEChpc is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEChpc2021 v1.1.7 on 2023-04-26 18:25:59-0400.  
Report generated on 2023-06-05 11:41:47 by hpc2021 PDF formatter v1.0.3.  
Originally published on 2023-06-05.