



SPEChpc™ 2021 Small Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPEChpc 2021_sml_base = 1.30

ThinkSystem SR665 V3 (AMD EPYC 9684X, 2.55 GHz)

SPEChpc 2021_sml_peak = 1.30

hpc2021 License: 28


Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

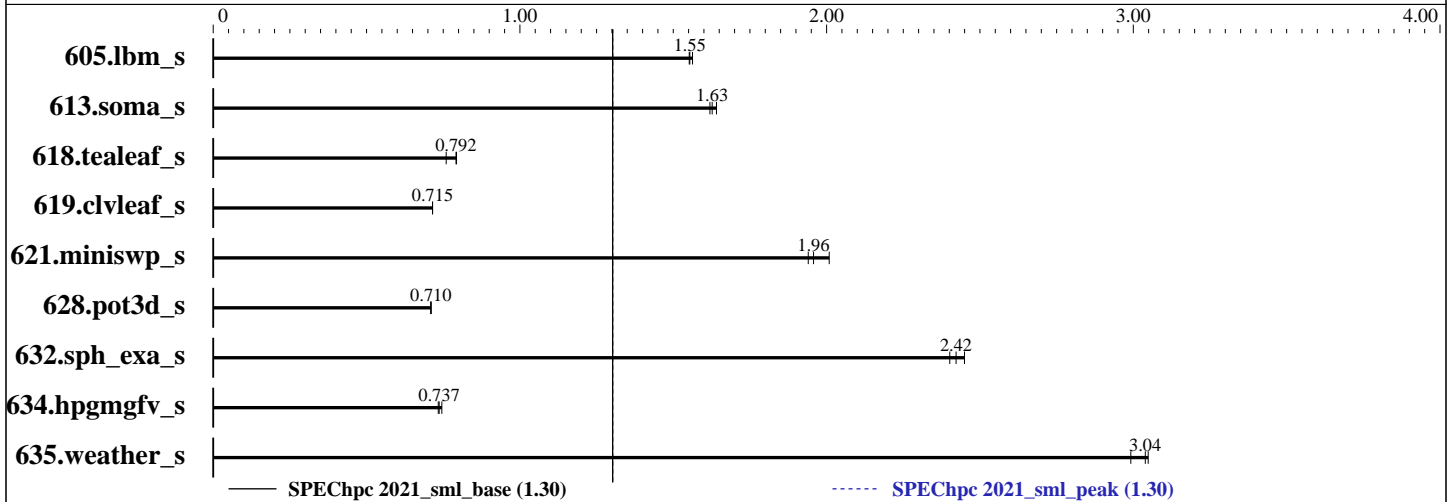

Results Table

Benchmark	Base								Peak									
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
605.lbm_s	MPI	192	1	992	1.56	997	1.55	999	1.55	MPI	192	1	992	1.56	997	1.55	999	1.55
613.soma_s	MPI	192	1	988	1.62	975	1.64	983	1.63	MPI	192	1	988	1.62	975	1.64	983	1.63
618.tealeaf_s	MPI	192	1	2699	0.760	2590	0.792	2584	0.793	MPI	192	1	2699	0.760	2590	0.792	2584	0.793
619.clvleaf_s	MPI	192	1	2308	0.715	2307	0.715	2307	0.715	MPI	192	1	2308	0.715	2307	0.715	2307	0.715
621.miniswp_s	MPI	192	1	548	2.01	567	1.94	562	1.96	MPI	192	1	548	2.01	567	1.94	562	1.96
628.pot3d_s	MPI	192	1	2360	0.710	2361	0.709	2358	0.710	MPI	192	1	2360	0.710	2361	0.709	2358	0.710
632.sph_exa_s	MPI	192	1	950	2.42	958	2.40	939	2.45	MPI	192	1	950	2.42	958	2.40	939	2.45
634.hpgmgfv_s	MPI	192	1	1308	0.745	1329	0.734	1323	0.737	MPI	192	1	1308	0.745	1329	0.734	1323	0.737
635.weather_s	MPI	192	1	853	3.05	869	2.99	856	3.04	MPI	192	1	853	3.05	869	2.99	856	3.04

SPEChpc 2021_sml_base = 1.30

SPEChpc 2021_sml_peak = 1.30

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEChpc™ 2021 Small Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPEChpc 2021_sml_base = 1.30

ThinkSystem SR665 V3 (AMD EPYC 9684X, 2.55 GHz)

SPEChpc 2021_sml_peak = 1.30

hpc2021 License: 28
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Hardware Summary

Type of System: SMP
Compute Node: ThinkSystem SR665 V3
Compute Nodes Used: 1
Total Chips: 2
Total Cores: 96
Total Threads: 192
Total Memory: 768 GB
Max. Peak Threads: 1

Software Summary

Compiler: Intel oneAPI Compiler 2022.1.0
MPI Library: Intel MPI Library for Linux OS, Build 20220227
Other MPI Info: None
Other Software: None
Base Parallel Model: MPI
Base Ranks Run: 192
Base Threads Run: 1
Peak Parallel Models: MPI
Minimum Peak Ranks: 192
Maximum Peak Ranks: 192
Max. Peak Threads: 1
Min. Peak Threads: 1

Node Description: ThinkSystem SR665 V3

Hardware

Number of nodes: 1
Uses of the node: Compute
Vendor: Lenovo Global Technology
Model: ThinkSystem SR665 V3
CPU Name: AMD EPYC 9684X
CPU(s) orderable: 1,2 chips
Chips enabled: 2
Cores enabled: 96
Cores per chip: 96
Threads per core: 2
CPU Characteristics: Max Boost Clock up to 3.7 GHz
CPU MHz: 2550
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per core
L3 Cache: 384 MB I+D on chip per chip
32 MB shared / 8 cores
Other Cache: None
Memory: 768 GB (32 x 32 GB 2Rx8 PC5-4800V)
Disk Subsystem: 1x ThinkSystem 2.5" 480 GB SSD
Other Hardware: None
Accel Count: None
Accel Model: None
Accel Vendor: None
Accel Type: None
Accel Connection: None
Accel ECC enabled: None
Accel Description: None
Adapter: None
Number of Adapters: 0
Slot Type: None
Data Rate: None
Ports Used: 0

Software

Accelerator Driver: None
Adapter: None
Adapter Driver: None
Adapter Firmware: None
Operating System: Red Hat Enterprise Linux Server release 8.6,
Kernel 4.18.0-372.9.1.el8.x86_64
Local File System: xfs
Shared File System: None
System State: Multi-user, run level 3
Other Software: None

(Continued on next page)



SPEChpc™ 2021 Small Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPEChpc 2021_sml_base = 1.30

ThinkSystem SR665 V3 (AMD EPYC 9684X, 2.55 GHz)

SPEChpc 2021_sml_peak = 1.30

hpc2021 License: 28
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Node Description: ThinkSystem SR665 V3

Hardware (Continued)

Interconnect Type: None

Submit Notes

The config file option 'submit' was used.

Compiler Version Notes

=====
FC 619.clvleaf_s(base) 628.pot3d_s(base) 635.weather_s(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
ifx: command line error: no files specified; for help type "ifx -help"

=====
CC 605.lbm_s(base) 613.soma_s(base) 618.tealeaf_s(base) 621.miniswp_s(base)
634.hpgmgfv_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
clang: warning: -Z-reserved-lib-stdc++: 'linker' input unused
[-Wunused-command-line-argument]

=====
CXXC 632.sph_exa_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
clang: warning: -Z-reserved-lib-stdc++: 'linker' input unused
[-Wunused-command-line-argument]

Base Compiler Invocation

C benchmarks:
mpiicc -cc=icx

(Continued on next page)



SPEChpc™ 2021 Small Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPEChpc 2021_sml_base = 1.30

ThinkSystem SR665 V3 (AMD EPYC 9684X, 2.55 GHz)

SPEChpc 2021_sml_peak = 1.30

hpc2021 License: 28
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Base Compiler Invocation (Continued)

C++ benchmarks:

```
mpiicpc -cxx=icx
```

Fortran benchmarks:

```
mpiifort -fc=ifx
```

Base Portability Flags

```
605.lbm_s: -lstdc++  
613.soma_s: -lstdc++  
618.tealeaf_s: -lstdc++  
619.clvleaf_s: -lstdc++  
621.miniswp_s: -lstdc++  
628.pot3d_s: -lstdc++  
632.sph_exa_s: -lstdc++  
634.hpgmgfv_s: -lstdc++  
635.weather_s: -lstdc++
```

Base Optimization Flags

C benchmarks:

```
-Ofast -march=core-avx2 -ipo -ansi-alias
```

C++ benchmarks:

```
-Ofast -march=core-avx2 -ipo -ansi-alias
```

Fortran benchmarks:

```
-Ofast -march=core-avx2 -ipo -nostandard-realloc-lhs  
-align array64byte
```

Peak Optimization Flags

C benchmarks:

```
605.lbm_s: basepeak = yes
```

```
613.soma_s: basepeak = yes
```

(Continued on next page)



SPEChpc™ 2021 Small Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPEChpc 2021_sml_base = 1.30

ThinkSystem SR665 V3 (AMD EPYC 9684X, 2.55 GHz)

SPEChpc 2021_sml_peak = 1.30

hpc2021 License: 28

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

618.tealeaf_s: basepeak = yes

621.miniswp_s: basepeak = yes

634.hpgmgfv_s: basepeak = yes

C++ benchmarks:

632.sph_exa_s: basepeak = yes

Fortran benchmarks:

619.clvleaf_s: basepeak = yes

628.pot3d_s: basepeak = yes

635.weather_s: basepeak = yes

The flags file that was used to format this result can be browsed at

http://www.spec.org/hpc2021/flags/Intel_compiler_flags.2023-12-13.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/hpc2021/flags/Intel_compiler_flags.2023-12-13.xml

SPEChpc is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEChpc2021 v1.1.8 on 2018-06-22 07:13:51-0400.

Report generated on 2023-12-13 20:40:16 by hpc2021 PDF formatter v1.0.3.

Originally published on 2023-12-13.