SPEC CINT95 Results

©Copyright 1995, Standard Performance Evaluation Corporation

Compaq Computer Corporation
AlphaServer DS10 6/600

SPECint95 = 35.3

SPECint_base95 = 30.9

SPEC license # 2	Tested By: Compaq NH	Test Date: Jun-2000	Hardware Avail: Oct-2000	Software Avail: Jul-2000

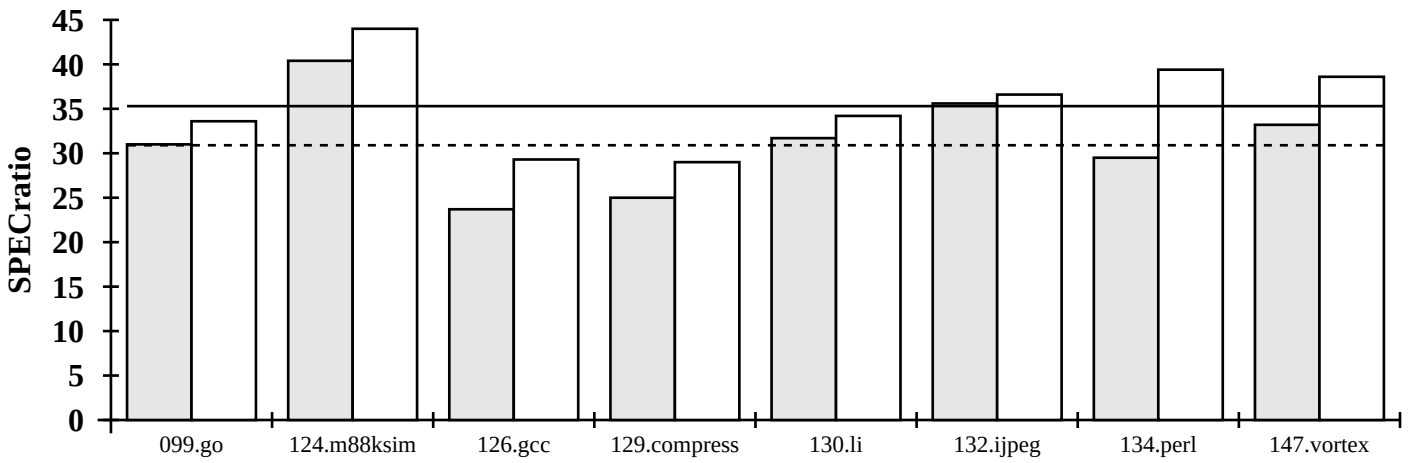

Hardware/Software Configuration for:
AlphaServer DS10 6/600

Hardware

Model Name:	AlphaServer DS10 6/600
CPU:	616 MHz Alpha 21264A
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	64KB(I)+64KB(D) on chip
Secondary Cache:	2MB off chip
Other Cache:	None
Memory:	2GB
Disk Subsystem:	1x9GB RZ2DD-LS
Other Hardware:	Ethernet

Software

Operating System:	Tru64 UNIX V4.0G
Compiler:	Compaq C T6.3-120-44A2I protect_headers_setup.sh cc.alt/om 27-Jan-1999
File System:	AdvFS
System State:	Multi-User

Benchmark # and Name	Reference Time	Base Run Time	Base SPEC Ratio	Run Time	SPEC Ratio
099.go	4600	148	31.0	137	33.6
124.m88ksim	1900	47.0	40.4	43	44.0
126.gcc	1700	71.6	23.7	58	29.3
129.compress	1800	72.0	25.0	62	29.0
130.li	1900	60.0	31.7	56	34.2
132.ijpeg	2400	67.3	35.6	66	36.6
134.perl	1900	64.5	29.5	48	39.4
147.vortex	2700	81.3	33.2	70	38.6
SPECint_base95 (G. Mean)			30.9		
		SPECint95 (G. Mean)			35.3

Notes/Tuning Information

```
Compiler invocation: cc -std1      Base tuning: -fast -arch ev6 -O4 + GemFB
go:        -g3 -arch ev6 -fast -inline speed -assume whole_program -non_shared +OmFB
m88ksim:   -g3 -arch ev6 -O4 -ifo -unroll 16 -non_shared +GemFB
gcc:       -g1 -arch ev6 -O4 -ifo -xtaso_short -noansi_alias -non_shared +BothFB
compress:  -g3 -arch ev6 -fast -O4 -assume whole_program -non_shared -lsys5 +GemFB
li:        -g1 -arch ev6 -fast -O4 -xtaso_short -speculate all -non_shared -lsys5 +GemFB
ijpeg:     -g3 -arch ev6 -fast -O4 -speculate all -unroll 8 -non_shared -lsys5 +GemFB
perl:      -g3 -arch ev6 -O4 -ifo -non_shared +BothFB
vortex:    -g3 -arch ev6 -fast -O4 -speculate all -non_shared +BothFB

Portability: m88ksim: -DLEHOST; perl: -DI_TIME;  vortex: -D__RISC_64__
GemFB:  PASS1=-prof_gen_noopt -prof_dir /tmp/prof PASS2=-prof_use_feedback    -prof_dir /tmp/prof
OmFB:   PASS1=-prof_gen       -prof_dir /tmp/prof PASS2=-prof_use_om_feedback -prof_dir /tmp/prof
.       fdo_pre1  = rm -f /tmp/prof/*Counts*
BothFB: PASS1=as in GemFB      PASS2=as in GemFB plus -r       fdo_run2  = %command%
.       fdo_pre2  = mv %exename% rr; ld [-taso] -o fb rr -lexc; pixie -pids fb -o %exename%
.       fdo_post2 = ld [-taso] -om rr -o rrom -lexc; prof -pixie -merge fb.Counts fb fb.Addrs
.            fb.Counts.*; /usr/lib/cmplrs/cc.dtk/om [-taso] -om_split_procedures
.            -om_ireorg_feedback fb -o %binary% rrom; rm -Rf /tmp/prof/*
.       [only gcc uses -taso in BothFB]
```

For More Information Contact: SPEC info@spec.org http://www.spec.org/

-- Prepared By: Compaq NH