



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 E1  
(Intel Xeon E5405, 2.00GHz)

SPECint®\_rate2006 = 54.2

SPECint\_rate\_base2006 = 45.9

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Feb-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

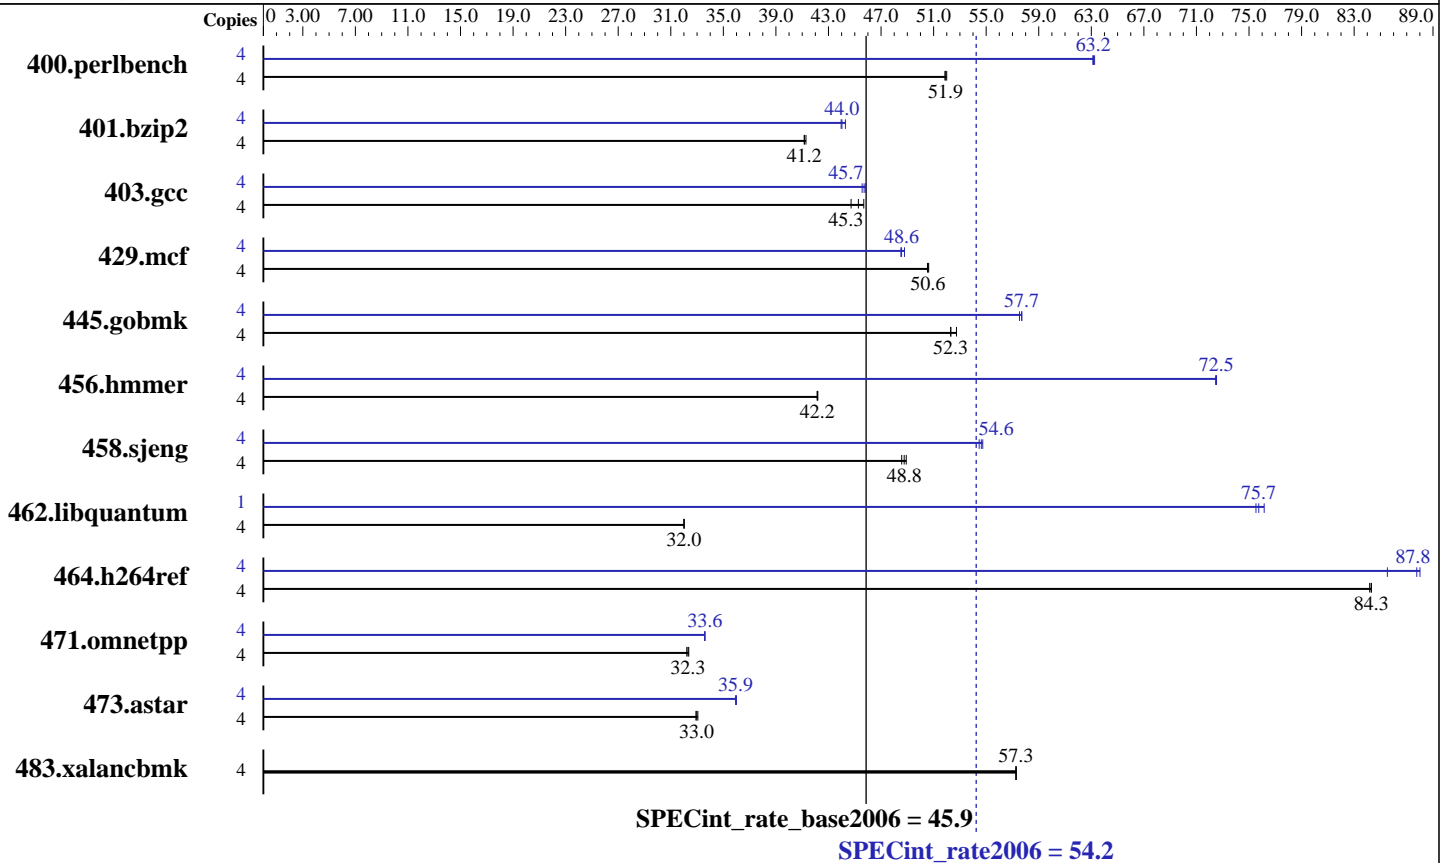

### Hardware

CPU Name: Intel Xeon E5405  
 CPU Characteristics: 2.00 GHz, 12 MB L2, 1333 MHz system bus  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)  
 Disk Subsystem: 1x73 GB SAS, 15000 RPM  
 Other Hardware: None

### Software

Operating System: SUSE LINUX Enterprise Server 10 SP1, Kernel 2.6.16.46-0.12-smp for x86\_64  
 Compiler: Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l\_cc\_p\_10.1.008  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Binutils 2.17.50.0.15 SmartHeap library V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 E1  
(Intel Xeon E5405, 2.00GHz)

SPECint\_rate2006 = 54.2

SPECint\_rate\_base2006 = 45.9

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Feb-2008  
Hardware Availability: Jan-2008  
Software Availability: Nov-2007

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	752	52.0	754	51.9	<b>753</b>	<b>51.9</b>	4	618	63.2	<b>619</b>	<b>63.2</b>	619	63.1
401.bzip2	4	938	41.2	<b>938</b>	<b>41.2</b>	935	41.3	4	878	44.0	<b>877</b>	<b>44.0</b>	872	44.3
403.gcc	4	<b>711</b>	<b>45.3</b>	705	45.7	720	44.7	4	<b>704</b>	<b>45.7</b>	707	45.6	703	45.8
429.mcf	4	<b>721</b>	<b>50.6</b>	722	50.5	721	50.6	4	<b>751</b>	<b>48.6</b>	752	48.5	748	48.8
445.gobmk	4	802	52.3	<b>802</b>	<b>52.3</b>	796	52.7	4	727	57.7	<b>727</b>	<b>57.7</b>	729	57.5
456.hammer	4	<b>885</b>	<b>42.2</b>	886	42.1	885	42.2	4	515	72.5	515	72.5	<b>515</b>	<b>72.5</b>
458.sjeng	4	996	48.6	<b>993</b>	<b>48.8</b>	989	48.9	4	889	54.5	884	54.7	<b>886</b>	<b>54.6</b>
462.libquantum	4	2588	32.0	<b>2590</b>	<b>32.0</b>	2590	32.0	1	272	76.2	<b>274</b>	<b>75.7</b>	274	75.5
464.h264ref	4	1050	84.3	<b>1050</b>	<b>84.3</b>	1052	84.2	4	1035	85.5	1006	88.0	<b>1009</b>	<b>87.8</b>
471.omnetpp	4	776	32.2	772	32.4	<b>774</b>	<b>32.3</b>	4	744	33.6	744	33.6	<b>744</b>	<b>33.6</b>
473.astar	4	<b>852</b>	<b>33.0</b>	853	32.9	849	33.1	4	780	36.0	<b>781</b>	<b>35.9</b>	781	35.9
483.xalancbmk	4	<b>482</b>	<b>57.3</b>	482	57.3	482	57.3	4	<b>482</b>	<b>57.3</b>	482	57.3	482	57.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
'/usr/bin/taskset' used to bind processes to CPUs  
OMP\_NUM\_THREADS set to number of cores (default)

## General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hammer, for peak, are compiled in 64-bit mode  
The Bull NovaScale R440 E1 (Intel Xeon E5405, 2.00GHz) and the Bull NovaScale R460 E1 (Intel Xeon E5405, 2.00GHz) models are electronically equivalent.  
The results have been measured on a NovaScale R460 E1 (Intel Xeon E5405, 2.00GHz) model.

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 E1  
(Intel Xeon E5405, 2.00GHz)

SPECint\_rate2006 = 54.2

SPECint\_rate\_base2006 = 45.9

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Feb-2008  
Hardware Availability: Jan-2008  
Software Availability: Nov-2007

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:  
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/spec/cpu2006/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include

456.hmmmer: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:  
icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmmer: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 E1  
(Intel Xeon E5405, 2.00GHz)

SPECint\_rate2006 = 54.2

SPECint\_rate\_base2006 = 45.9

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Feb-2008  
Hardware Availability: Jan-2008  
Software Availability: Nov-2007

## Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias  
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch  
-opt-streaming-stores always -vec-guard-write  
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs -L/spec/cpu2006/lib -lsmarheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs -L/spec/cpu2006/lib -lsmarheap

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 E1  
(Intel Xeon E5405, 2.00GHz)

SPECint\_rate2006 = 54.2

SPECint\_rate\_base2006 = 45.9

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Bull SAS

**Test date:** Feb-2008  
**Hardware Availability:** Jan-2008  
**Software Availability:** Nov-2007

## Peak Other Flags (Continued)

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090713.03.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090713.03.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 17:14:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 May 2008.