



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Gd
(Intel Xeon E5205)

SPECint®_rate2006 = 26.6

SPECint_rate_base2006 = 22.7

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2008

Hardware Availability: Apr-2008

Software Availability: Nov-2007

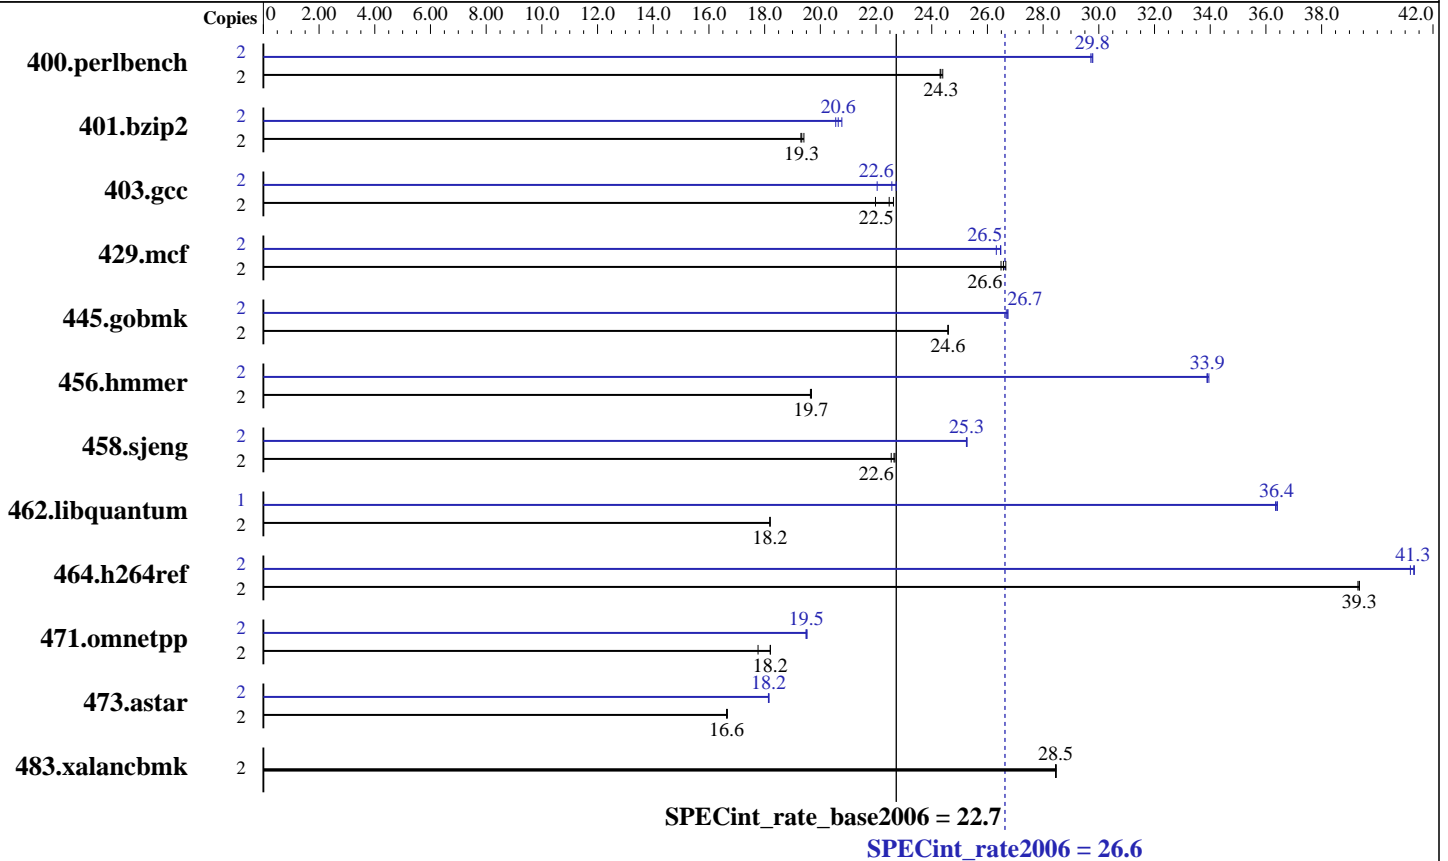

Hardware

CPU Name: Intel Xeon E5205
 CPU Characteristics: 1.86 GHz, 6 MB L2, 1066 MHz bus
 CPU MHz: 1867
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB (8x1 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
 Disk Subsystem: 1x250 GB SATAII, 7200RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler for Linux32 and Linux64 version 10.1 Build 20070913 Package ID: L_cc_p_10.1.008
 Auto Parallel: Yes
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap library 8.1 binutils-2.17.tar.gz, Version 2.17



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Gd
(Intel Xeon E5205)

SPECint_rate2006 = 26.6

SPECint_rate_base2006 = 22.7

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2008

Hardware Availability: Apr-2008

Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	804	24.3	801	24.4	803	24.3	2	658	29.7	657	29.8	656	29.8
401.bzip2	2	1000	19.3	998	19.3	994	19.4	2	939	20.6	935	20.6	929	20.8
403.gcc	2	716	22.5	732	22.0	712	22.6	2	730	22.0	713	22.6	709	22.7
429.mcf	2	689	26.5	686	26.6	684	26.7	2	693	26.3	689	26.5	689	26.5
445.gobmk	2	853	24.6	853	24.6	853	24.6	2	786	26.7	785	26.7	785	26.7
456.hmmer	2	949	19.7	948	19.7	950	19.6	2	550	33.9	550	34.0	551	33.9
458.sjeng	2	1069	22.6	1067	22.7	1073	22.5	2	958	25.3	959	25.2	958	25.3
462.libquantum	2	2278	18.2	2278	18.2	2278	18.2	1	570	36.3	569	36.4	569	36.4
464.h264ref	2	1125	39.4	1125	39.3	1126	39.3	2	1071	41.3	1075	41.2	1071	41.3
471.omnetpp	2	687	18.2	687	18.2	704	17.8	2	641	19.5	641	19.5	640	19.5
473.astar	2	844	16.6	843	16.7	844	16.6	2	774	18.1	774	18.2	773	18.2
483.xalancbmk	2	485	28.5	485	28.5	485	28.4	2	485	28.5	485	28.5	485	28.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores

Platform Notes

Bios settings:
Hardware Prefetcher: Enabled
Adjacent Cache Line Prefetch: Enabled
Intel SpeedStep Technology: Disabled

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2,
456.hmmer, for peak, are compiled in 64-bit mode

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Gd
(Intel Xeon E5205)

SPECint_rate2006 = 26.6

SPECint_rate_base2006 = 22.7

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2008

Hardware Availability: Apr-2008

Software Availability: Nov-2007

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

456.hmmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Gd
(Intel Xeon E5205)

SPECint_rate2006 = 26.6

SPECint_rate_base2006 = 22.7

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2008

Hardware Availability: Apr-2008

Software Availability: Nov-2007

Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmarheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmarheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Gd
(Intel Xeon E5205)

SPECint_rate2006 = 26.6

SPECint_rate_base2006 = 22.7

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2008

Hardware Availability: Apr-2008

Software Availability: Nov-2007

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-INT-ia32-linux-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-INT-ia32-linux-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:23:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 June 2008.