



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 G5  
(3.33 GHz, Intel Xeon X5470)

**SPECint\_rate2006 = 80.6**

**SPECint\_rate\_base2006 = 75.4**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

**Test date:** Aug-2008

**Hardware Availability:** Sep-2008

**Software Availability:** Nov-2008

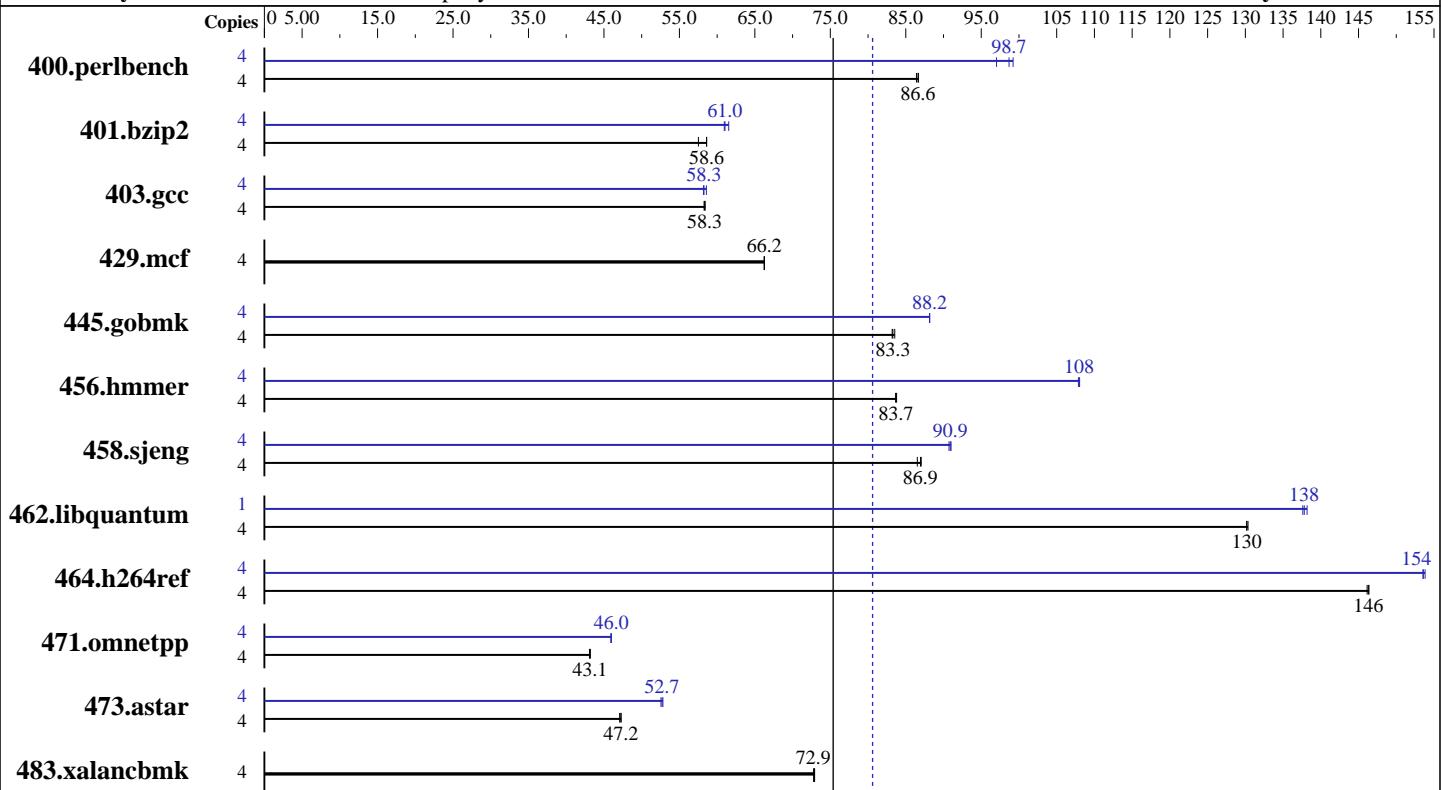

**SPECint\_rate\_base2006 = 75.4**

**SPECint\_rate2006 = 80.6**

### Hardware

CPU Name: Intel Xeon X5470  
CPU Characteristics: 3.33 GHz, 2x6 MB L2 shared, 1333 MHz system bus  
CPU MHz: 3333  
FPU: Integrated  
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
L3 Cache: None  
Other Cache: None  
Memory: 16 GB (8x2 GB PC2-5300F CL5)  
Disk Subsystem: 1x146 GB 10 K SAS  
Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
Compiler: Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l\_cproc\_b\_11.0.042  
Auto Parallel: Yes  
File System: ext2  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: MicroQuill SmartHeap Library 8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 G5  
(3.33 GHz, Intel Xeon X5470)

**SPECint\_rate2006 = 80.6**

**SPECint\_rate\_base2006 = 75.4**

CPU2006 license: 3

Test date: Aug-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2008

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	<b>451</b>	<b>86.6</b>	452	86.4	451	86.7	4	<b>396</b>	<b>98.7</b>	403	97.0	394	99.2
401.bzip2	4	<b>659</b>	<b>58.6</b>	671	57.5	659	58.6	4	<b>633</b>	<b>60.9</b>	627	61.5	<b>632</b>	<b>61.0</b>
403.gcc	4	553	58.3	<b>552</b>	<b>58.3</b>	551	58.4	4	<b>553</b>	<b>58.2</b>	<b>553</b>	<b>58.3</b>	550	58.6
429.mcf	4	550	66.3	<b>551</b>	<b>66.2</b>	551	66.2	4	550	66.3	<b>551</b>	<b>66.2</b>	551	66.2
445.gobmk	4	<b>504</b>	<b>83.3</b>	504	83.2	502	83.5	4	476	88.2	476	88.2	<b>476</b>	<b>88.2</b>
456.hmmer	4	446	83.7	445	83.8	<b>446</b>	<b>83.7</b>	4	346	108	<b>346</b>	<b>108</b>	345	108
458.sjeng	4	556	87.0	559	86.5	<b>557</b>	<b>86.9</b>	4	533	90.7	532	91.0	<b>532</b>	<b>90.9</b>
462.libquantum	4	637	130	636	130	<b>637</b>	<b>130</b>	1	151	138	150	138	<b>150</b>	<b>138</b>
464.h264ref	4	606	146	605	146	<b>605</b>	<b>146</b>	4	575	154	577	154	<b>576</b>	<b>154</b>
471.omnetpp	4	580	43.1	<b>580</b>	<b>43.1</b>	579	43.2	4	<b>544</b>	<b>46.0</b>	544	45.9	544	46.0
473.astar	4	594	47.3	596	47.1	<b>594</b>	<b>47.2</b>	4	534	52.6	<b>533</b>	<b>52.7</b>	532	52.8
483.xalancbmk	4	379	72.8	379	72.9	<b>379</b>	<b>72.9</b>	4	379	72.8	379	72.9	<b>379</b>	<b>72.9</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
taskset was used to bind processes to cores except  
for 462.libquantum peak

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to physical,0  
KMP\_STACKSIZE set to 64M

## Platform Notes

BIOS configuration:  
Power Regulator set to Static High Performance Mode  
Adjacent Sector Prefetch Disabled  
Hardware Prefetcher Disabled

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 G5  
(3.33 GHz, Intel Xeon X5470)

**SPECint\_rate2006 = 80.6**

**SPECint\_rate\_base2006 = 75.4**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Aug-2008

**Hardware Availability:** Sep-2008

**Software Availability:** Nov-2008

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

```
-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3 -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap
```

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/042/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

456.hmmr: /opt/intel/Compiler/11.0/042/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

C++ benchmarks:

icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmr: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 G5  
(3.33 GHz, Intel Xeon X5470)

**SPECint\_rate2006 = 80.6**

**SPECint\_rate\_base2006 = 75.4**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Aug-2008

**Hardware Availability:** Sep-2008

**Software Availability:** Nov-2008

## Peak Portability Flags (Continued)

462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
               -no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
               -no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
          -opt-malloc-options=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
               -no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll12
               -ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
               -no-prec-div -static -unroll14

462.libquantum: -xSSE4.1 -ipo -O3 -no-prec-div -static
                  -opt-malloc-options=3 -parallel -par-runtime-control
                  -opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
               -no-prec-div -static -unroll12 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
               -no-prec-div -ansi-alias -opt-ra-region-strategy=block
               -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
               -no-prec-div -ansi-alias -opt-ra-region-strategy=routine
               -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 G5  
(3.33 GHz, Intel Xeon X5470)

**SPECint\_rate2006 = 80.6**

**SPECint\_rate\_base2006 = 75.4**

**CPU2006 license:** 3

**Test date:** Aug-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** Nov-2008

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090713.00.html>  
<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revD.20090713.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090713.00.xml>  
<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revD.20090713.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 19:35:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 September 2008.