



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®2006 = 37.2

PowerEdge M610 (Intel Xeon X5550, 2.67 GHz)

SPECfp_base2006 = 35.3

CPU2006 license: 55


Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

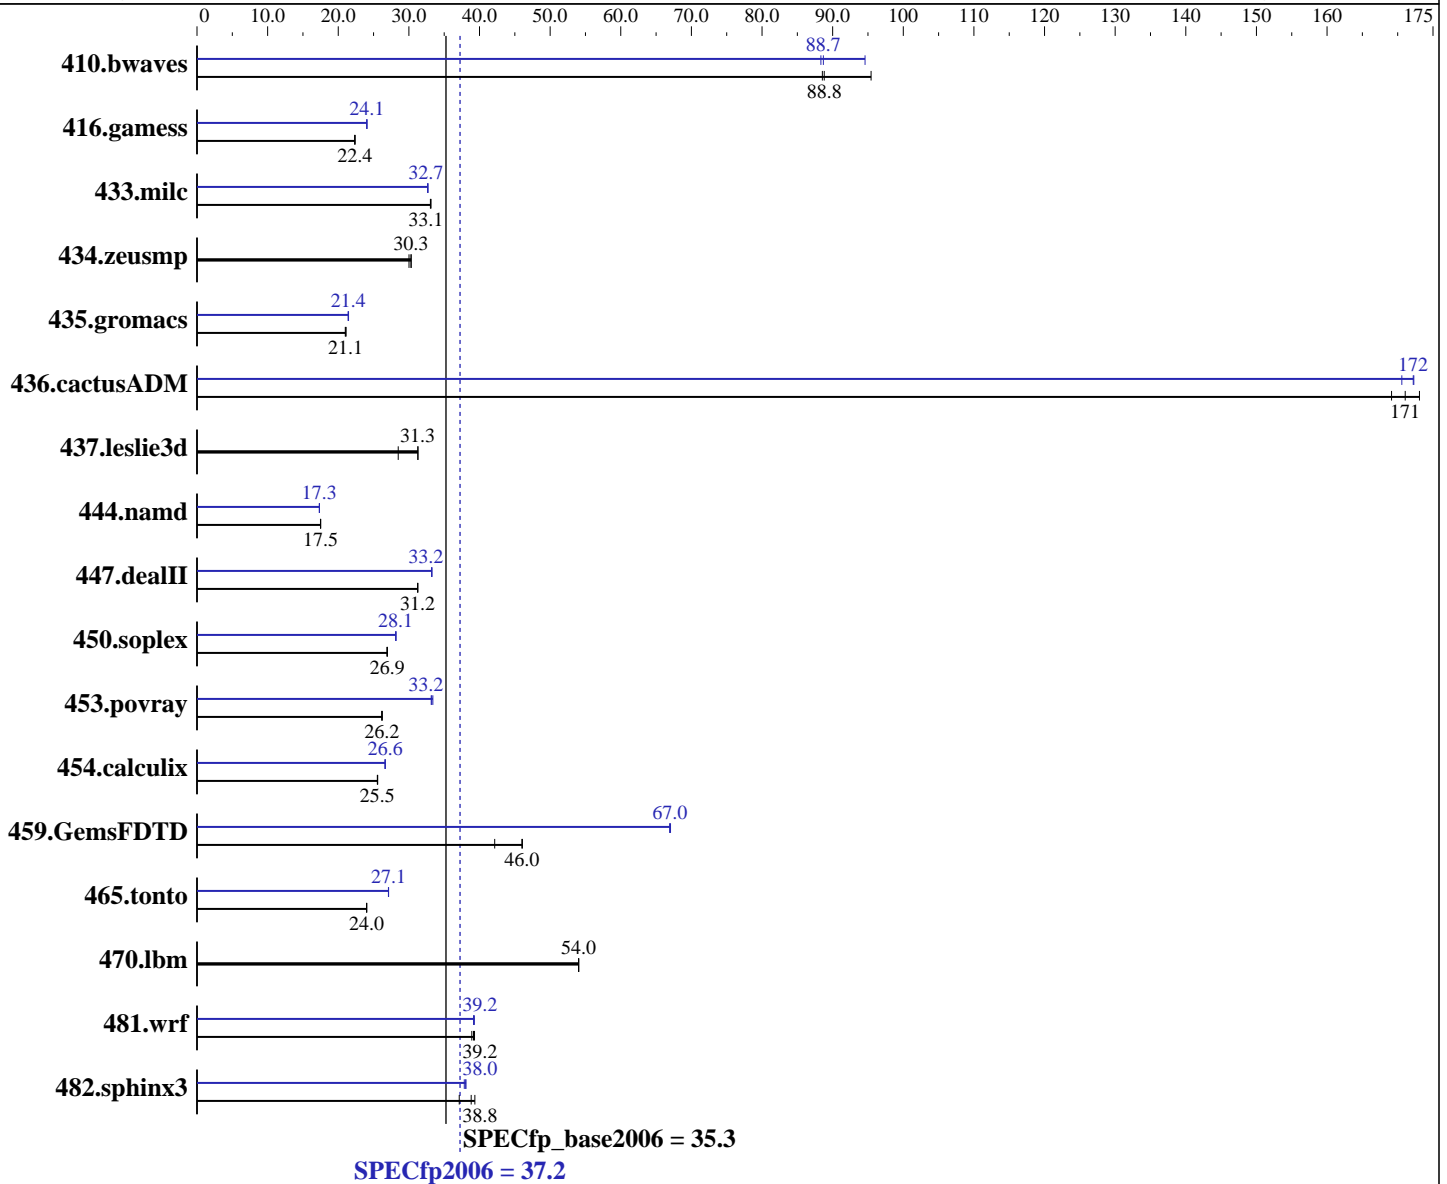

Hardware

CPU Name: Intel Xeon X5550
 CPU Characteristics: Intel Turbo Boost Technology up to 3.06 GHz
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ and Fortran Compiler Professional 11.0 for Linux
 Build 20090131 Package ID: l_cproc_p_11.0.080, l_cprof_p_11.0.080
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 37.2

PowerEdge M610 (Intel Xeon X5550, 2.67 GHz)

SPECfp_base2006 = 35.3

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4 GB DDR3-1333 DR RDIMM)
 Disk Subsystem: 1 x 73 GB 10000 RPM SAS
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	142	95.4	153	88.5	<u>153</u>	<u>88.8</u>	144	94.6	154	88.3	<u>153</u>	<u>88.7</u>
416.gamess	877	22.3	875	22.4	<u>876</u>	<u>22.4</u>	814	24.1	814	24.0	<u>814</u>	<u>24.1</u>
433.milc	277	33.1	<u>277</u>	<u>33.1</u>	278	33.0	281	32.7	281	32.7	<u>281</u>	<u>32.7</u>
434.zeusmp	<u>300</u>	<u>30.3</u>	303	30.0	300	30.3	<u>300</u>	<u>30.3</u>	303	30.0	300	30.3
435.gromacs	338	21.1	<u>339</u>	<u>21.1</u>	340	21.0	<u>333</u>	<u>21.4</u>	333	21.4	333	21.5
436.cactusADM	69.0	173	<u>69.9</u>	<u>171</u>	70.7	169	69.4	172	<u>69.4</u>	<u>172</u>	70.1	171
437.leslie3d	<u>301</u>	<u>31.3</u>	300	31.3	330	28.5	<u>301</u>	<u>31.3</u>	300	31.3	330	28.5
444.namd	458	17.5	<u>458</u>	<u>17.5</u>	459	17.5	<u>463</u>	<u>17.3</u>	463	17.3	462	17.3
447.dealII	<u>366</u>	<u>31.2</u>	366	31.2	366	31.3	<u>344</u>	<u>33.2</u>	344	33.2	344	33.3
450.soplex	309	27.0	<u>310</u>	<u>26.9</u>	310	26.9	296	28.2	296	28.1	<u>296</u>	<u>28.1</u>
453.povray	<u>203</u>	<u>26.2</u>	203	26.2	203	26.2	<u>160</u>	<u>33.2</u>	160	33.2	159	33.4
454.calculix	<u>323</u>	<u>25.5</u>	322	25.6	323	25.5	<u>310</u>	<u>26.6</u>	310	26.6	310	26.6
459.GemsFDTD	<u>231</u>	<u>46.0</u>	252	42.2	230	46.1	159	66.9	<u>158</u>	<u>67.0</u>	158	67.0
465.tonto	<u>410</u>	<u>24.0</u>	410	24.0	410	24.0	363	27.1	<u>363</u>	<u>27.1</u>	363	27.1
470.lbm	254	54.0	<u>254</u>	<u>54.0</u>	254	54.0	254	54.0	<u>254</u>	<u>54.0</u>	254	54.0
481.wrf	287	38.9	284	39.3	<u>285</u>	<u>39.2</u>	285	39.2	284	39.3	<u>285</u>	<u>39.2</u>
482.sphinx3	495	39.3	525	37.1	<u>502</u>	<u>38.8</u>	<u>513</u>	<u>38.0</u>	512	38.1	515	37.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

OMP_NUM_THREADS set to number of cores
 KMP_AFFINITY set to granularity=fine,scatter
 KMP_STACKSIZE set to 200M

Base Compiler Invocation

C benchmarks:
 icc

C++ benchmarks:
 icpc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 37.2

PowerEdge M610 (Intel Xeon X5550, 2.67 GHz)

SPECfp_base2006 = 35.3

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 37.2

PowerEdge M610 (Intel Xeon X5550, 2.67 GHz)

SPECfp_base2006 = 35.3

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

Peak Compiler Invocation (Continued)

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):

`icpc`

450.soplex: `icpc -m32`

Fortran benchmarks:

`ifort`

Benchmarks using both Fortran and C:

`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
 416.gamess: `-DSPEC_CPU_LP64`
 433.milc: `-DSPEC_CPU_LP64`
 434.zeusmp: `-DSPEC_CPU_LP64`
 435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
 436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
 437.leslie3d: `-DSPEC_CPU_LP64`
 444.namd: `-DSPEC_CPU_LP64`
 447.dealII: `-DSPEC_CPU_LP64`
 453.povray: `-DSPEC_CPU_LP64`
 454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
 459.GemsFDTD: `-DSPEC_CPU_LP64`
 465.tonto: `-DSPEC_CPU_LP64`
 470.lbm: `-DSPEC_CPU_LP64`
 481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -fno-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2`

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 37.2

PowerEdge M610 (Intel Xeon X5550, 2.67 GHz)

SPECfp_base2006 = 35.3

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep- -opt-prefetch

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 37.2

PowerEdge M610 (Intel Xeon X5550, 2.67 GHz)

SPECfp_base2006 = 35.3

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

```
481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
        -parallel -auto-ilp32
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.04.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.04.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:47:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 April 2009.