



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp®\_rate2006 = 115**

PowerEdge M610 (Intel Xeon E5504, 2.00 GHz)

**SPECfp\_rate\_base2006 = 111**

CPU2006 license: 55


Test date: Jun-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

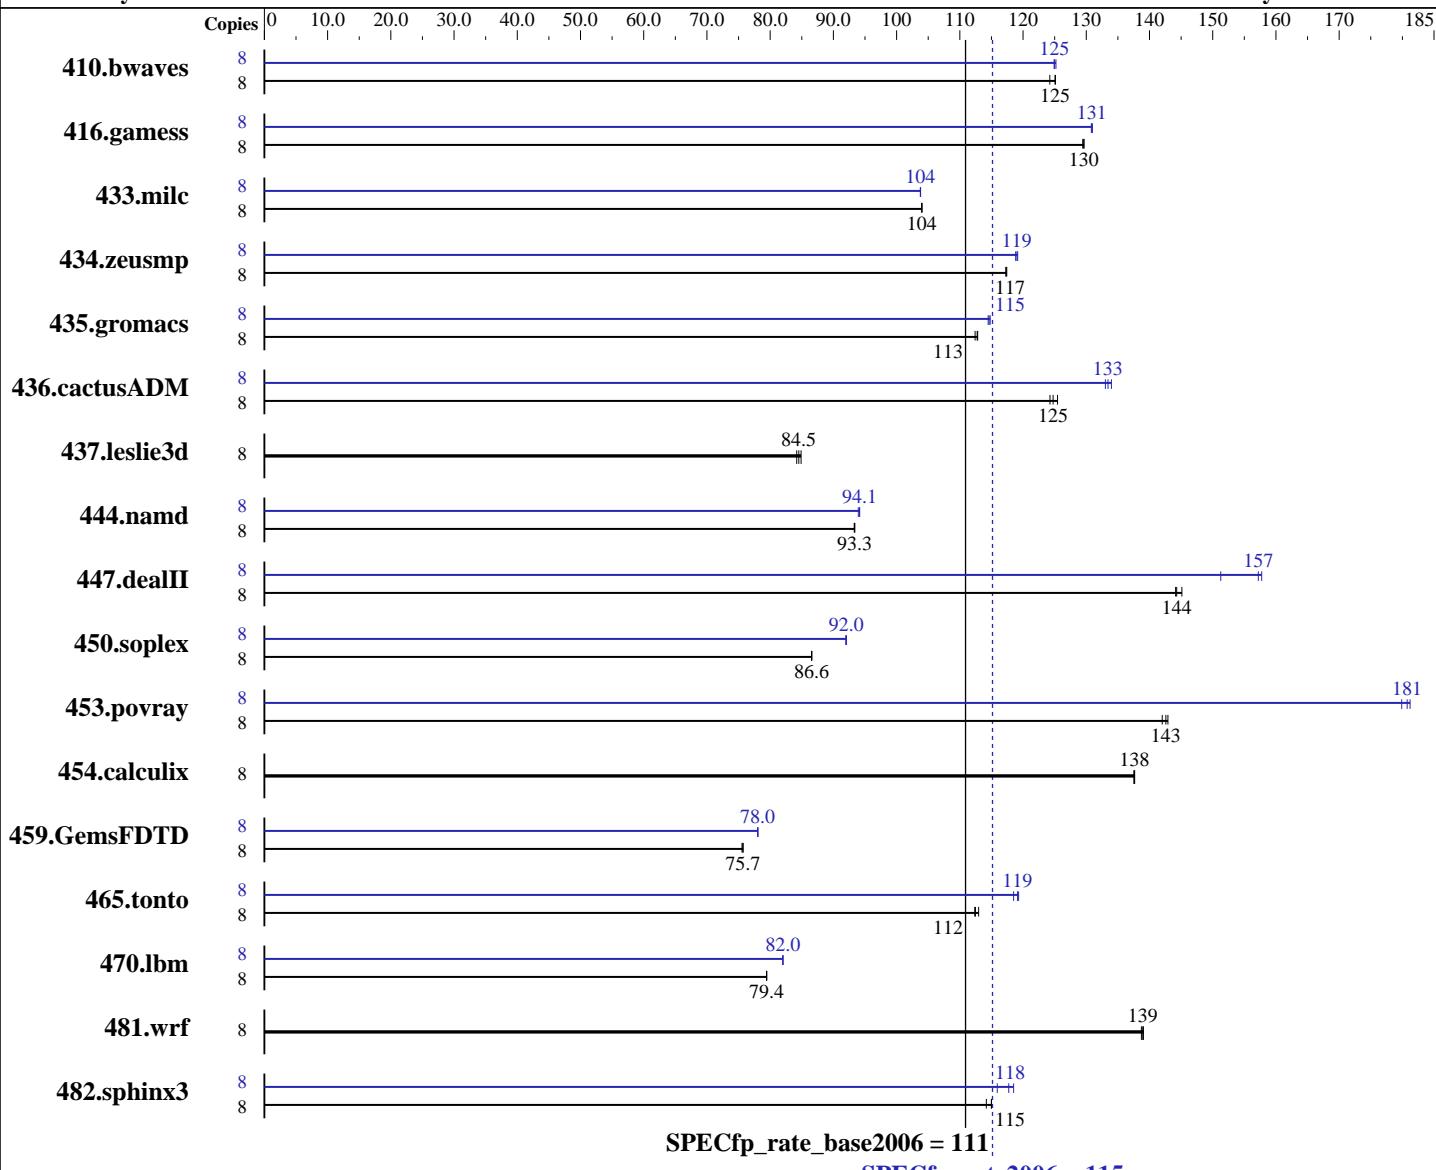

## Hardware

CPU Name: Intel Xeon E5504  
CPU Characteristics:  
CPU MHz: 2000  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16.60-0.21-smp  
Compiler: Intel C++ and Fortran Compiler Professional 11.0 for Linux Build 20090131 Package ID: l\_cproc\_p\_11.0.080, l\_cprof\_p\_11.0.080  
Auto Parallel: No  
File System: ReiserFS  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 115**

PowerEdge M610 (Intel Xeon E5504, 2.00 GHz)

**SPECfp\_rate\_base2006 = 111**

CPU2006 license: 55

Test date: Jun-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

L3 Cache: 4 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB DDR3-1066 DR RDIMM downclocked to 800 MHz)  
 Disk Subsystem: 1 x 73 GB 15000 RPM SAS  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	875	124	869	125	<u>869</u>	<u>125</u>	8	<u>870</u>	<u>125</u>	870	125	868	125
416.gamess	8	1208	130	1210	129	<u>1209</u>	<u>130</u>	8	<u>1197</u>	<u>131</u>	1198	131	1196	131
433.milc	8	<b>706</b>	<b>104</b>	706	104	706	104	8	708	104	708	104	<b>708</b>	<b>104</b>
434.zeusmp	8	621	117	<b>620</b>	<b>117</b>	620	117	8	613	119	611	119	<b>612</b>	<b>119</b>
435.gromacs	8	<b>507</b>	<b>113</b>	506	113	508	112	8	499	114	498	115	<b>498</b>	<b>115</b>
436.cactusADM	8	769	124	762	125	<u>766</u>	<u>125</u>	8	<u>716</u>	<u>133</u>	719	133	714	134
437.leslie3d	8	886	84.9	<u>890</u>	<u>84.5</u>	893	84.2	8	886	84.9	<u>890</u>	<u>84.5</u>	893	84.2
444.namd	8	687	93.4	688	93.3	<u>687</u>	<u>93.3</u>	8	681	94.2	683	93.9	<b>682</b>	<b>94.1</b>
447.dealII	8	<b>634</b>	<b>144</b>	635	144	631	145	8	605	151	<b>582</b>	<b>157</b>	580	158
450.soplex	8	771	86.5	771	86.6	<u>771</u>	<u>86.6</u>	8	725	92.1	<u>725</u>	<u>92.0</u>	725	92.0
453.povray	8	300	142	<u>298</u>	<u>143</u>	298	143	8	237	180	235	181	<b>235</b>	<b>181</b>
454.calculix	8	479	138	480	138	<u>480</u>	<u>138</u>	8	479	138	480	138	<b>480</b>	<b>138</b>
459.GemsFDTD	8	<u>1122</u>	<u>75.7</u>	1121	75.7	1124	75.5	8	1088	78.0	1087	78.1	<b>1088</b>	<b>78.0</b>
465.tonto	8	697	113	701	112	<u>700</u>	<u>112</u>	8	660	119	664	119	<b>661</b>	<b>119</b>
470.lbm	8	<b>1384</b>	<b>79.4</b>	1384	79.4	1383	79.5	8	<u>1340</u>	<u>82.0</u>	1340	82.0	1340	82.0
481.wrf	8	643	139	644	139	<u>643</u>	<u>139</u>	8	643	139	644	139	<b>643</b>	<b>139</b>
482.sphinx3	8	<b>1356</b>	<b>115</b>	1365	114	1356	115	8	<u>1316</u>	<u>119</u>	1345	116	<b>1324</b>	<b>118</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Base Compiler Invocation

C benchmarks:  
 icc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M610 (Intel Xeon E5504, 2.00 GHz)

**SPECfp\_rate2006 = 115**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jun-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.games: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M610 (Intel Xeon E5504, 2.00 GHz)

**SPECfp\_rate2006 = 115**

CPU2006 license: 55

**Test date:** Jun-2009

Test sponsor: Dell Inc.

**Hardware Availability:** Mar-2009

Tested by: Dell Inc.

**Software Availability:** Feb-2009

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias

470.lbm: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M610 (Intel Xeon E5504, 2.00 GHz)

**SPECfp\_rate2006 = 115**

CPU2006 license: 55

Test date: Jun-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

## Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -unroll2 -opt-prefetch -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M610 (Intel Xeon E5504, 2.00 GHz)

**SPECfp\_rate2006 = 115**

**CPU2006 license:** 55

**Test date:** Jun-2009

**Test sponsor:** Dell Inc.

**Hardware Availability:** Mar-2009

**Tested by:** Dell Inc.

**Software Availability:** Feb-2009

## Peak Optimization Flags (Continued)

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 01:16:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 June 2009.