



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp®2006 = 45.3

Motherboard X8DTG-QF (Intel Xeon X5670, 2.93 GHz)

SPECfp\_base2006 = 42.4

CPU2006 license: 001176


Test date: Mar-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Sep-2009

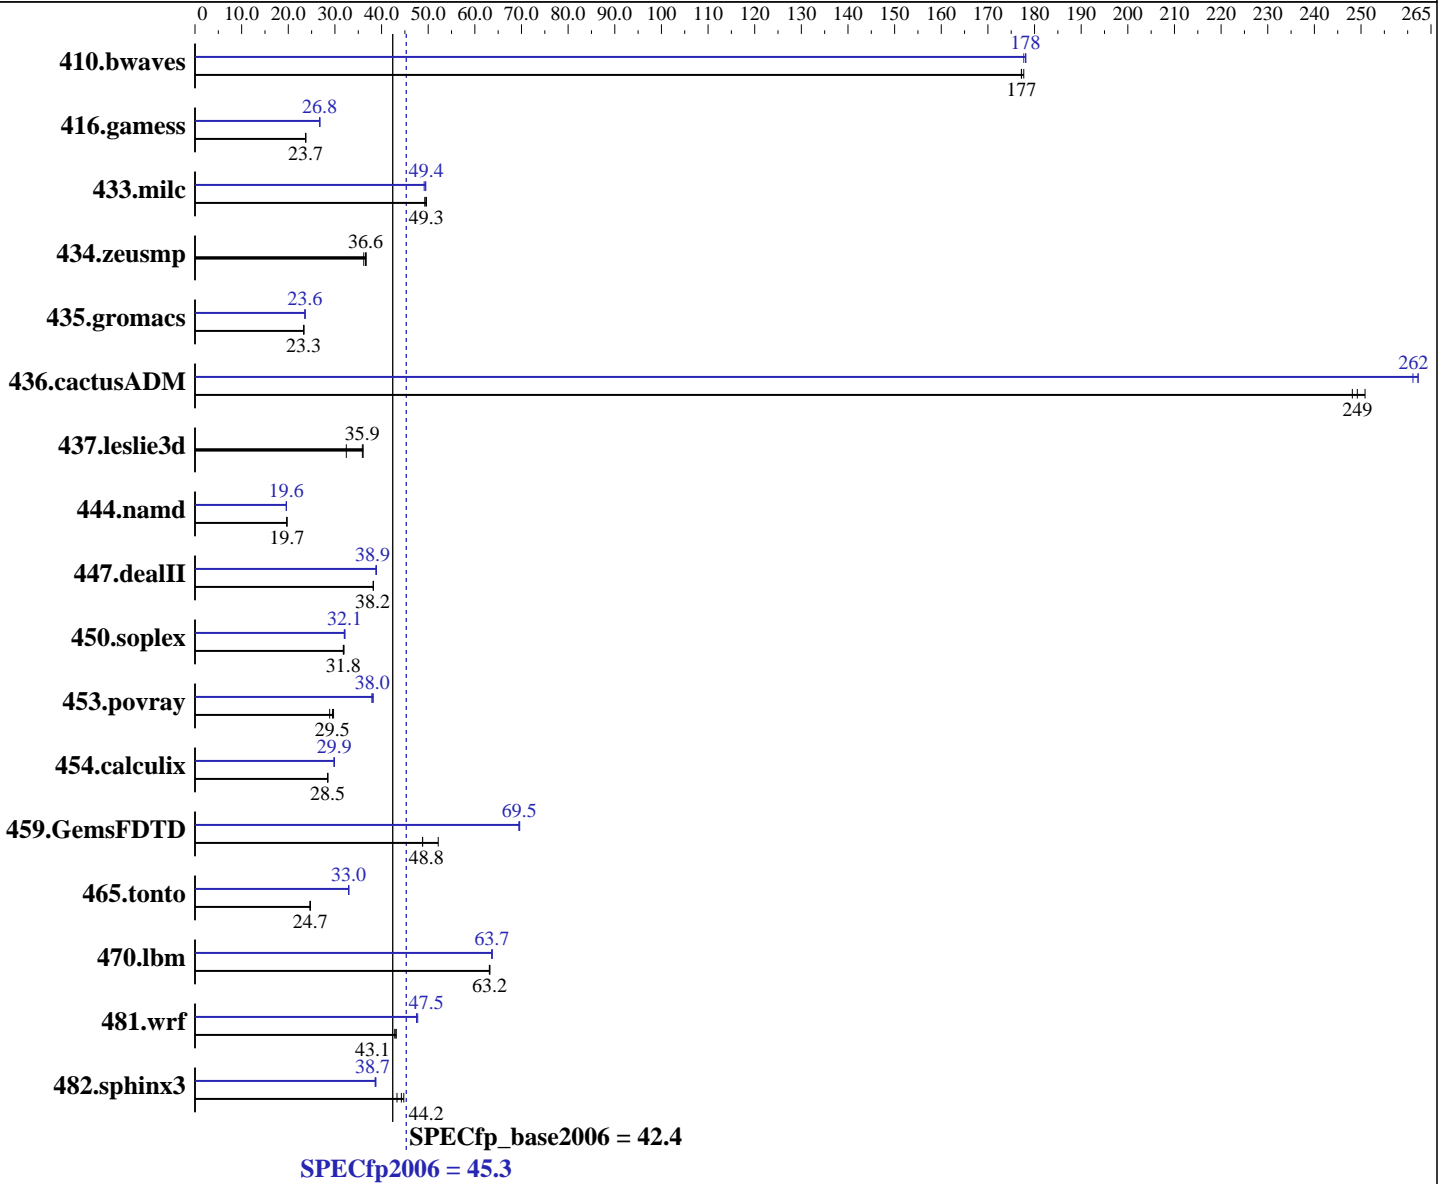

### Hardware

CPU Name: Intel Xeon X5670  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
 CPU MHz: 2933  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1  
 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp2006 = **45.3**

Motherboard X8DTG-QF (Intel Xeon X5670, 2.93 GHz)

SPECfp\_base2006 = **42.4**

CPU2006 license: 001176

Test date: Mar-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Sep-2009

L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (6 x 4 GB DDR3-1333 RDIMM, CL9)  
 Disk Subsystem: 2 x 300 GB SAS RAID0, 15000 RPM  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	76.5	178	76.7	177	<b>76.7</b>	<b>177</b>	<b>76.3</b>	<b>178</b>	76.3	178	76.5	178
416.gamess	<b>825</b>	<b>23.7</b>	826	23.7	824	23.8	<b>732</b>	<b>26.8</b>	733	26.7	732	26.8
433.milc	<b>186</b>	<b>49.3</b>	185	49.6	186	49.3	<b>186</b>	<b>49.4</b>	187	49.1	186	49.5
434.zeusmp	248	36.7	251	36.2	<b>249</b>	<b>36.6</b>	248	36.7	251	36.2	<b>249</b>	<b>36.6</b>
435.gromacs	306	23.3	306	23.3	<b>306</b>	<b>23.3</b>	<b>303</b>	<b>23.6</b>	303	23.6	302	23.6
436.cactusADM	<b>48.0</b>	<b>249</b>	47.6	251	48.2	248	<b>45.6</b>	<b>262</b>	45.6	262	45.8	261
437.leslie3d	<b>262</b>	<b>35.9</b>	290	32.4	261	36.1	<b>262</b>	<b>35.9</b>	290	32.4	261	36.1
444.namd	<b>407</b>	<b>19.7</b>	407	19.7	407	19.7	410	19.6	409	19.6	<b>409</b>	<b>19.6</b>
447.dealII	299	38.2	299	38.3	<b>299</b>	<b>38.2</b>	294	38.9	295	38.8	<b>294</b>	<b>38.9</b>
450.soplex	261	32.0	262	31.8	<b>262</b>	<b>31.8</b>	259	32.2	<b>260</b>	<b>32.1</b>	261	32.0
453.povray	179	29.7	184	28.9	<b>180</b>	<b>29.5</b>	139	38.2	<b>140</b>	<b>38.0</b>	140	37.9
454.calculix	290	28.4	<b>290</b>	<b>28.5</b>	290	28.5	276	29.9	<b>276</b>	<b>29.9</b>	277	29.8
459.GemsFDTD	218	48.8	<b>217</b>	<b>48.8</b>	203	52.1	<b>153</b>	<b>69.5</b>	152	69.6	153	69.4
465.tonto	<b>398</b>	<b>24.7</b>	398	24.7	399	24.7	299	32.9	298	33.0	<b>298</b>	<b>33.0</b>
470.lbm	217	63.2	<b>218</b>	<b>63.2</b>	218	63.1	<b>216</b>	<b>63.7</b>	216	63.6	216	63.7
481.wrf	261	42.8	259	43.1	<b>259</b>	<b>43.1</b>	235	47.5	<b>235</b>	<b>47.5</b>	234	47.8
482.sphinx3	435	44.8	<b>440</b>	<b>44.2</b>	450	43.3	505	38.6	<b>503</b>	<b>38.7</b>	503	38.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

## Platform Notes

Fan speed set to Full Speed in BIOS Setup.  
 As tested, the system used a Supermicro  
 PWS-865-PQ power supply and 2 SNK-P0035AP4 heatsinks,  
 along with 2 Nidec UltraFlo T92T12MMA7-57 T072 and  
 1 SANYO DENKI San Ace 80 9G0812G103 cooling fans.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp2006 = 45.3

Motherboard X8DTG-QF (Intel Xeon X5670, 2.93 GHz)

SPECfp\_base2006 = 42.4

CPU2006 license: 001176

Test date: Mar-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Sep-2009

## General Notes

OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter  
KMP\_STACKSIZE set to 200M  
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECfp2006 = 45.3**

Motherboard X8DTG-QF (Intel Xeon X5670, 2.93 GHz)

**SPECfp\_base2006 = 42.4**

**CPU2006 license:** 001176

**Test date:** Mar-2010

**Test sponsor:** Supermicro

**Hardware Availability:** Mar-2010

**Tested by:** Supermicro

**Software Availability:** Sep-2009

## Base Optimization Flags (Continued)

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-ansi-alias`

470.lbm: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-parallel -ansi-alias -auto-ilp32`

482.sphinx3: `-xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
-unroll2`

C++ benchmarks:

444.namd: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 45.3

Motherboard X8DTG-QF (Intel Xeon X5670, 2.93 GHz)

SPECfp\_base2006 = 42.4

CPU2006 license: 001176

Test date: Mar-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Sep-2009

## Peak Optimization Flags (Continued)

447.dealIII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep- -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -auto-ilp32

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 45.3

Motherboard X8DTG-QF (Intel Xeon X5670, 2.93 GHz)

SPECfp\_base2006 = 42.4

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2010

Hardware Availability: Mar-2010

Software Availability: Sep-2009

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 08:06:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 4 May 2010.