



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp®_rate2006 = 127

Servidor Itaotec MX203 (Intel Xeon X5670)

SPECfp_rate_base2006 = 123

CPU2006 license: 9001


Test sponsor: Itaotec

Tested by: Itaotec

Test date: May-2010

Hardware Availability: Apr-2010

Software Availability: Apr-2010

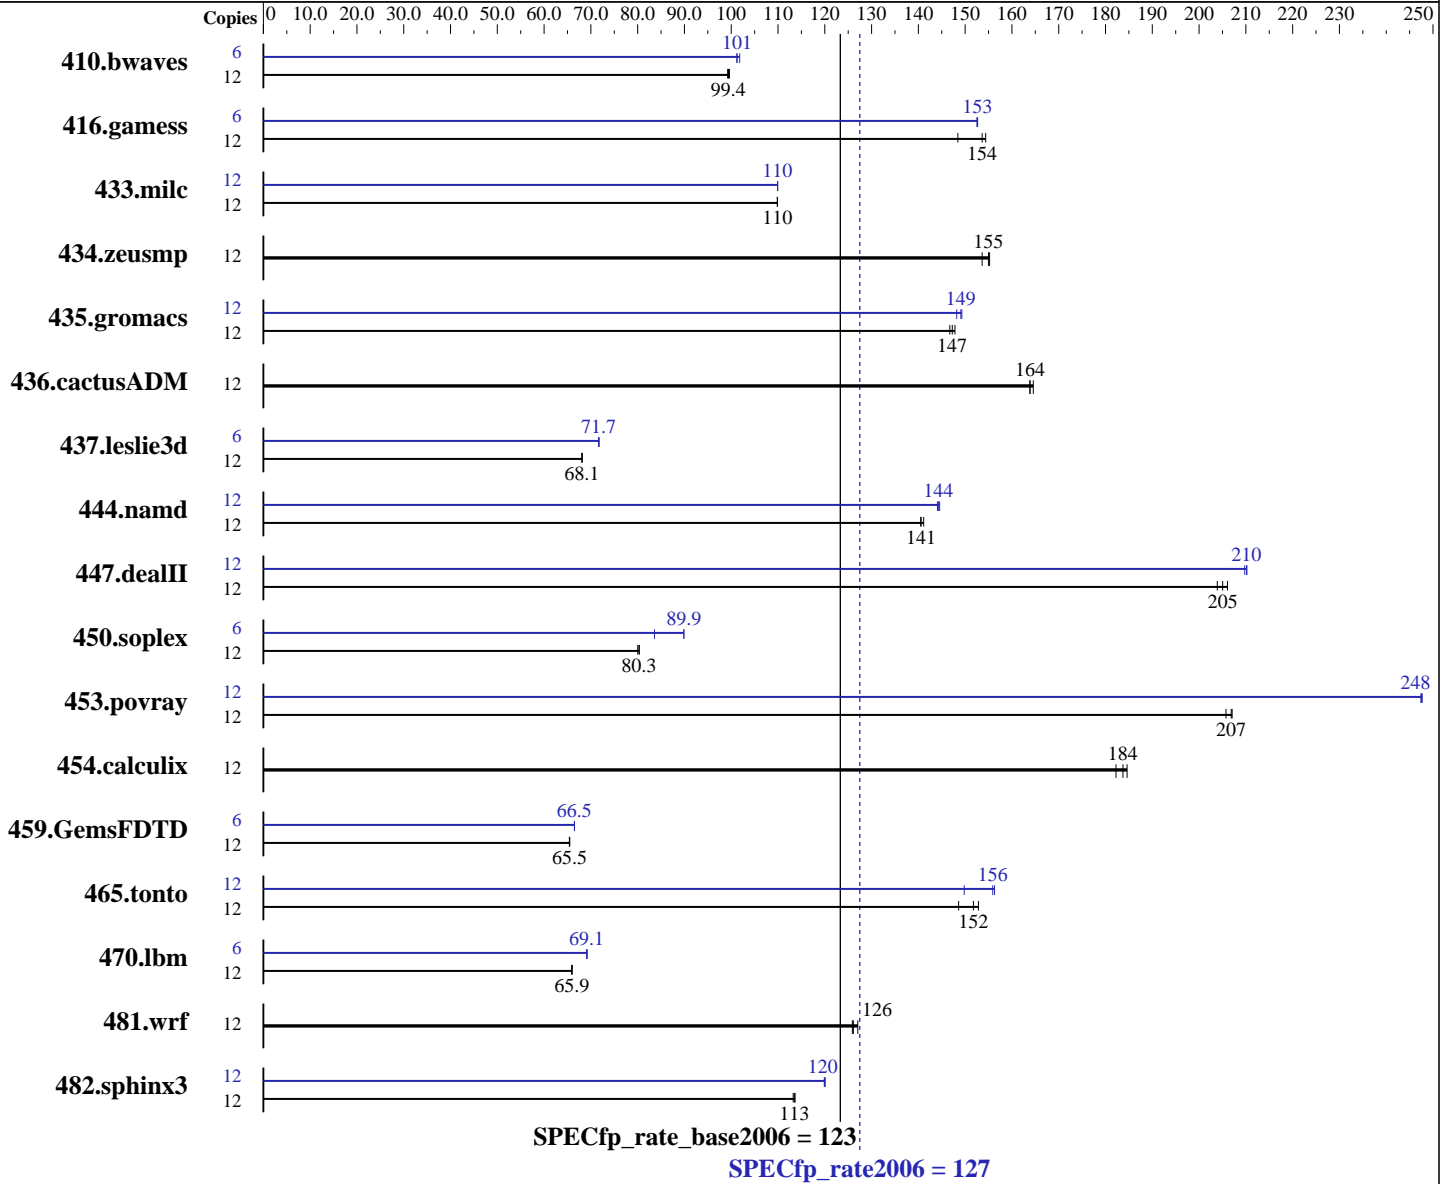

Hardware

CPU Name: Intel Xeon X5670
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-smp
 Compiler: Intel C++ and Fortran Professional Compiler 11.1 for Linux
 Build 20100414 Package ID: l_cproc_p_11.1.072, l_cprof_p_11.1.072
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp_rate2006 = 127

Servidor Itautec MX203 (Intel Xeon X5670)

SPECfp_rate_base2006 = 123

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: May-2010
Hardware Availability: Apr-2010
Software Availability: Apr-2010

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 24 GB (6 x 4GB, DDR3-1333, Dual Rank, CL 9, ECC)
Disk Subsystem: 1 x 160 GB SATA-2, 7200 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	1637	99.6	1640	99.4	1643	99.2	6	805	101	801	102	806	101
416.gamess	12	1529	154	1583	148	1522	154	6	770	153	770	153	770	153
433.milc	12	1003	110	1003	110	1003	110	12	1002	110	1002	110	1002	110
434.zeusmp	12	705	155	703	155	711	154	12	705	155	703	155	711	154
435.gromacs	12	580	148	584	147	582	147	12	575	149	578	148	574	149
436.cactusADM	12	875	164	875	164	871	165	12	875	164	875	164	871	165
437.leslie3d	12	1655	68.2	1657	68.1	1656	68.1	6	787	71.7	786	71.8	787	71.7
444.namd	12	682	141	685	141	685	140	12	668	144	666	145	667	144
447.dealII	12	670	205	673	204	666	206	12	653	210	653	210	654	210
450.soplex	12	1251	80.0	1246	80.3	1246	80.3	6	599	83.6	557	89.9	557	89.9
453.povray	12	309	207	308	207	310	206	12	258	247	258	248	258	248
454.calculix	12	539	184	536	185	543	182	12	539	184	536	185	543	182
459.GemsFDTD	12	1947	65.4	1945	65.5	1945	65.5	6	957	66.5	957	66.5	957	66.5
465.tonto	12	795	149	778	152	773	153	12	756	156	757	156	788	150
470.lbm	12	2499	66.0	2500	65.9	2500	65.9	6	1191	69.2	1193	69.1	1193	69.1
481.wrf	12	1055	127	1063	126	1065	126	12	1055	127	1063	126	1065	126
482.sphinx3	12	2065	113	2061	113	2058	114	12	1951	120	1949	120	1948	120

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.

General Notes

This result was measured on the Servidor Itautec MX223.
The Servidor Itautec MX223 and the Servidor Itautec MX203 are electronically equivalent.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp_rate2006 = 127

Servidor Itaotec MX203 (Intel Xeon X5670)

SPECfp_rate_base2006 = 123

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: May-2010
Hardware Availability: Apr-2010
Software Availability: Apr-2010

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp_rate2006 = 127

Servidor Itaotec MX203 (Intel Xeon X5670)

SPECfp_rate_base2006 = 123

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: May-2010
Hardware Availability: Apr-2010
Software Availability: Apr-2010

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -ansi-alias -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp_rate2006 = 127

Servidor Itautec MX203 (Intel Xeon X5670)

SPECfp_rate_base2006 = 123

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: May-2010
Hardware Availability: Apr-2010
Software Availability: Apr-2010

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp_rate2006 = 127

Servidor Itautec MX203 (Intel Xeon X5670)

SPECfp_rate_base2006 = 123

CPU2006 license: 9001

Test date: May-2010

Test sponsor: Itautec

Hardware Availability: Apr-2010

Tested by: Itautec

Software Availability: Apr-2010

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itautec-Intel-ic11.1-linux64-revE.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itautec-Intel-ic11.1-linux64-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 09:24:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 May 2010.