



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint®_rate2006 = 74.8

Acer AB460 F1 (Intel Xeon E5502, 1.86 GHz)

SPECint_rate_base2006 = 69.0

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2010

Hardware Availability: Jul-2010

Software Availability: Jan-2010

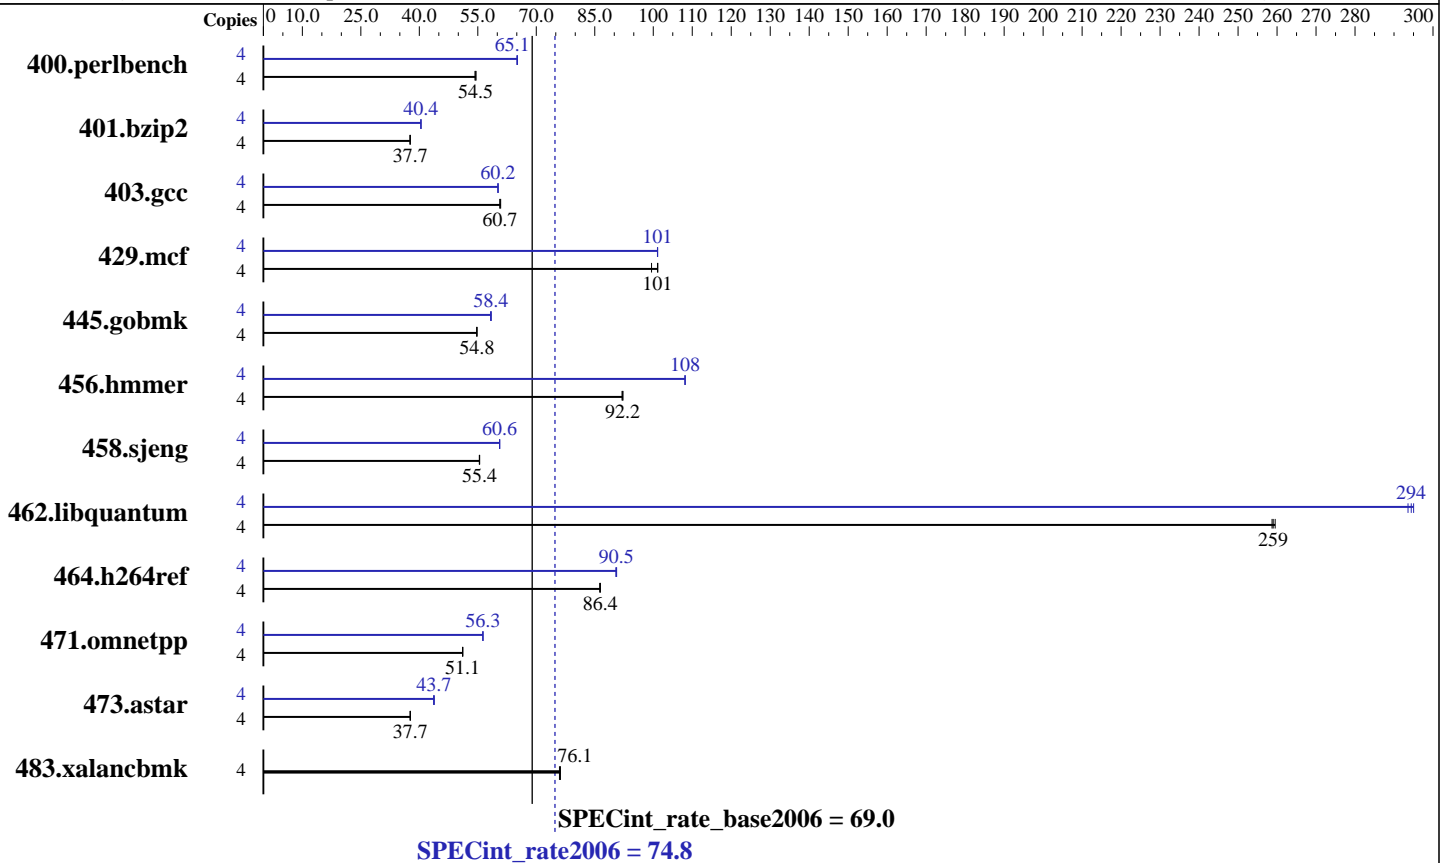

Hardware

CPU Name: Intel Xeon E5502
 CPU Characteristics: 1866
 CPU MHz: 1866
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4 GB DDR3-1333 RDIMM, ECC, CL9 running at 800MHz)
 Disk Subsystem: 1 x 300 GB SATA II, 10000 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 Kernel 2.6.27.19-5-default
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1
 Build 20091130 Package ID: l_cproc_p_11.1.064
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 74.8

Acer AB460 F1 (Intel Xeon E5502, 1.86 GHz)

SPECint_rate_base2006 = 69.0

CPU2006 license: 97

Test date: May-2010

Test sponsor: Acer Incorporated

Hardware Availability: Jul-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	717	54.5	718	54.5	720	54.3	4	600	65.1	600	65.2	601	65.0
401.bzip2	4	1025	37.7	1026	37.6	1025	37.7	4	955	40.4	956	40.4	955	40.4
403.gcc	4	530	60.7	531	60.7	529	60.9	4	535	60.2	535	60.2	535	60.2
429.mcf	4	366	99.6	361	101	361	101	4	361	101	361	101	361	101
445.gobmk	4	766	54.8	767	54.7	766	54.8	4	718	58.4	720	58.3	718	58.4
456.hmmer	4	405	92.2	406	92.0	405	92.2	4	345	108	345	108	345	108
458.sjeng	4	874	55.4	872	55.5	873	55.4	4	799	60.6	799	60.6	799	60.6
462.libquantum	4	320	259	319	260	320	259	4	282	294	281	295	282	294
464.h264ref	4	1025	86.4	1024	86.4	1026	86.3	4	977	90.6	978	90.5	979	90.4
471.omnetpp	4	489	51.2	489	51.1	489	51.1	4	444	56.3	444	56.3	444	56.3
473.astar	4	746	37.6	745	37.7	745	37.7	4	643	43.7	642	43.7	640	43.8
483.xalancbmk	4	363	76.1	363	75.9	362	76.2	4	363	76.1	363	75.9	362	76.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

Platform Notes

Fan speed set to full Speed (ie. Enterprise Blade mode) with Smart Blade Console through CMM (Chassis Management Module)

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

The Acer AB460 F1, and Gateway GB460 F1 are electronically equivalent.
This result was measured on Gateway GB460 F1.

Base Compiler Invocation

C benchmarks:
icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 74.8

Acer AB460 F1 (Intel Xeon E5502, 1.86 GHz)

SPECint_rate_base2006 = 69.0

CPU2006 license: 97

Test date: May-2010

Test sponsor: Acer Incorporated

Hardware Availability: Jul-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmarheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):
icpc -m32

473.astar: icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 74.8

Acer AB460 F1 (Intel Xeon E5502, 1.86 GHz)

SPECint_rate_base2006 = 69.0

CPU2006 license: 97

Test date: May-2010

Test sponsor: Acer Incorporated

Hardware Availability: Jul-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
            -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
            -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
                -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
              -prof-use(pass 2) -unroll2 -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 74.8

Acer AB460 F1 (Intel Xeon E5502, 1.86 GHz)

SPECint_rate_base2006 = 69.0

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2010

Hardware Availability: Jul-2010

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
           -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 13:20:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 July 2010.