



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

### SPECint®\_rate2006 = 194

PRIMERGY RX200 S6, Intel Xeon X5680, 3.33 GHz

### SPECint\_rate\_base2006 = 182

CPU2006 license: 19


Test date: Jun-2010

Test sponsor: Fujitsu

Hardware Availability: May-2010

Tested by: Fujitsu

Software Availability: Jan-2010

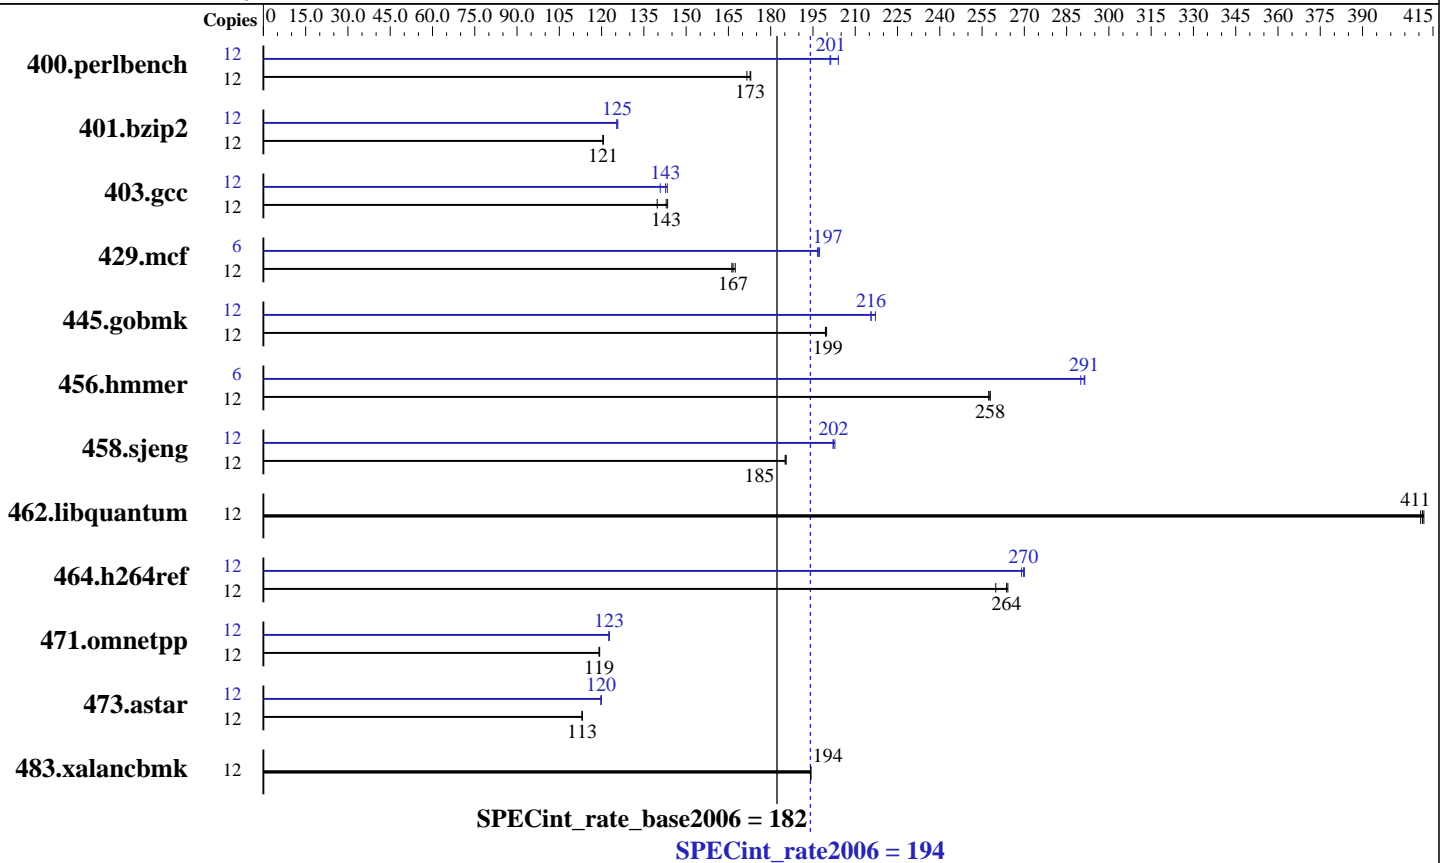

### Hardware

CPU Name: Intel Xeon X5680  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 3333  
 FPU: Integrated  
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (6x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC, see add'l detail in notes)  
 Disk Subsystem: 1 x SAS, 300 GB, 10000 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064  
 Auto Parallel: No  
 File System: ext3  
 System State: Multi-User Run Level 3  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECint\_rate2006 = 194

PRIMERGY RX200 S6, Intel Xeon X5680, 3.33 GHz

SPECint\_rate\_base2006 = 182

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Jun-2010  
Hardware Availability: May-2010  
Software Availability: Jan-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	678	173	<b>679</b>	<b>173</b>	683	172	12	583	201	575	204	<b>582</b>	<b>201</b>
401.bzip2	12	960	121	961	120	<b>961</b>	<b>121</b>	12	<b>923</b>	<b>125</b>	924	125	921	126
403.gcc	12	691	140	673	143	<b>676</b>	<b>143</b>	12	674	143	686	141	<b>677</b>	<b>143</b>
429.mcf	12	<b>657</b>	<b>167</b>	654	167	658	166	6	277	197	278	197	<b>278</b>	<b>197</b>
445.gobmk	12	631	199	630	200	<b>631</b>	<b>199</b>	12	<b>584</b>	<b>216</b>	580	217	584	216
456.hammer	12	<b>434</b>	<b>258</b>	435	257	434	258	6	<b>192</b>	<b>291</b>	193	290	192	291
458.sjeng	12	784	185	<b>783</b>	<b>185</b>	783	185	12	716	203	<b>718</b>	<b>202</b>	718	202
462.libquantum	12	606	411	<b>605</b>	<b>411</b>	604	412	12	606	411	<b>605</b>	<b>411</b>	604	412
464.h264ref	12	1005	264	1022	260	<b>1007</b>	<b>264</b>	12	987	269	<b>985</b>	<b>270</b>	983	270
471.omnetpp	12	<b>629</b>	<b>119</b>	629	119	629	119	12	612	123	611	123	<b>611</b>	<b>123</b>
473.astar	12	745	113	<b>745</b>	<b>113</b>	745	113	12	702	120	<b>703</b>	<b>120</b>	703	120
483.xalancbmk	12	426	194	<b>426</b>	<b>194</b>	426	194	12	426	194	<b>426</b>	<b>194</b>	426	194

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS configuration:  
Data Reuse Optimization = Disable

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502  
For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 194**

PRIMERGY RX200 S6, Intel Xeon X5680, 3.33 GHz

**SPECint\_rate\_base2006 = 182**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jun-2010

**Hardware Availability:** May-2010

**Software Availability:** Jan-2010

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libic11.1-32bit -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 194

PRIMERGY RX200 S6, Intel Xeon X5680, 3.33 GHz

SPECint\_rate\_base2006 = 182

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Jun-2010  
Hardware Availability: May-2010  
Software Availability: Jan-2010

## Peak Portability Flags (Continued)

462.libquantum: -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 194**

PRIMERGY RX200 S6, Intel Xeon X5680, 3.33 GHz

**SPECint\_rate\_base2006 = 182**

**CPU2006 license:** 19

**Test date:** Jun-2010

**Test sponsor:** Fujitsu

**Hardware Availability:** May-2010

**Tested by:** Fujitsu

**Software Availability:** Jan-2010

## Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 11:34:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 20 July 2010.