



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®2006 = 33.1

IBM BladeCenter HS22V (Intel Xeon E5645)

SPECint_base2006 = 30.4

CPU2006 license: 11


Test date: Jun-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

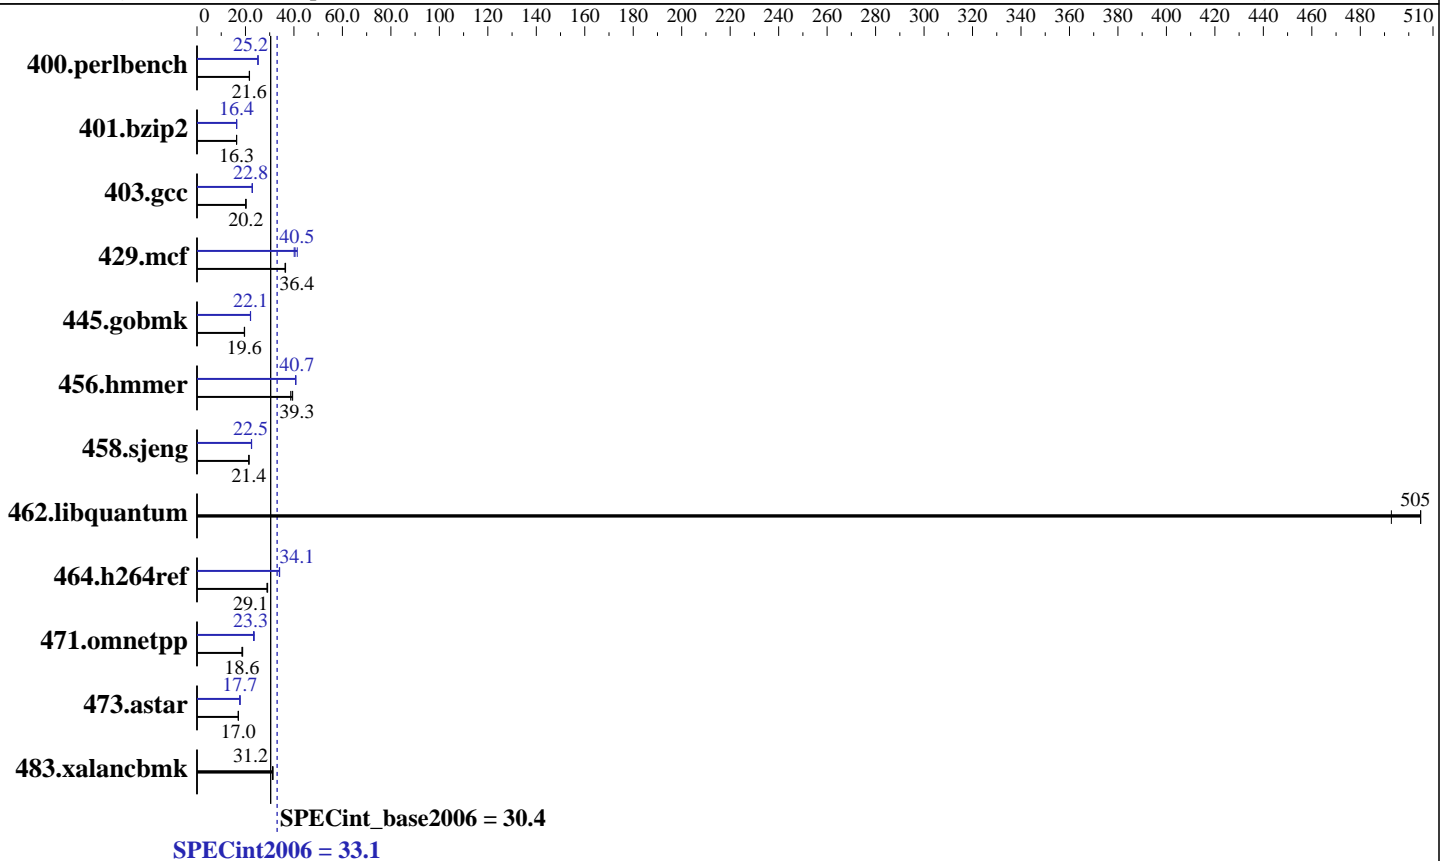

Hardware

CPU Name: Intel Xeon E5645
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (12 x 2 GB PC3-10600R CL9, 2 Rank)
 Disk Subsystem: 2 x 50 GB SATA, SSD, RAID 0
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1
 Build 20091130 Package ID: l_cproc_p_11.1.064
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 33.1

IBM BladeCenter HS22V (Intel Xeon E5645)

SPECint_base2006 = 30.4

CPU2006 license: 11

Test date: Jun-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<u>451</u>	<u>21.6</u>	451	21.7	453	21.6	388	25.2	<u>388</u>	<u>25.2</u>	388	25.2
401.bzip2	589	16.4	592	16.3	<u>591</u>	<u>16.3</u>	590	16.3	589	16.4	<u>590</u>	<u>16.4</u>
403.gcc	401	20.1	<u>398</u>	<u>20.2</u>	398	20.2	<u>353</u>	<u>22.8</u>	352	22.8	353	22.8
429.mcf	250	36.5	<u>250</u>	<u>36.4</u>	251	36.4	220	41.4	227	40.1	<u>225</u>	<u>40.5</u>
445.gobmk	537	19.5	534	19.6	<u>536</u>	<u>19.6</u>	474	22.1	<u>475</u>	<u>22.1</u>	476	22.0
456.hammer	236	39.5	241	38.7	<u>238</u>	<u>39.3</u>	229	40.7	229	40.7	<u>229</u>	<u>40.7</u>
458.sjeng	564	21.5	<u>565</u>	<u>21.4</u>	566	21.4	536	22.6	539	22.4	<u>538</u>	<u>22.5</u>
462.libquantum	42.0	493	41.0	505	<u>41.0</u>	<u>505</u>	42.0	493	41.0	505	<u>41.0</u>	<u>505</u>
464.h264ref	767	28.9	759	29.2	<u>762</u>	<u>29.1</u>	649	34.1	<u>649</u>	<u>34.1</u>	652	34.0
471.omnetpp	331	18.9	336	18.6	<u>336</u>	<u>18.6</u>	264	23.6	268	23.3	<u>268</u>	<u>23.3</u>
473.astar	<u>412</u>	<u>17.0</u>	412	17.0	410	17.1	398	17.6	<u>396</u>	<u>17.7</u>	394	17.8
483.xalancbmk	221	31.2	<u>221</u>	<u>31.2</u>	220	31.4	221	31.2	<u>221</u>	<u>31.2</u>	220	31.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

Turbo Mode enabled
Turbo Boost set to Traditional
Power C-states enabled
Demand Scrub disabled

General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 33.1

IBM BladeCenter HS22V (Intel Xeon E5645)

SPECint_base2006 = 30.4

CPU2006 license: 11

Test date: Jun-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`400.perlbench: icc -m32`

`429.mcf: icc -m32`

`445.gobmk: icc -m32`

`464.h264ref: icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 33.1

IBM BladeCenter HS22V (Intel Xeon E5645)

SPECint_base2006 = 30.4

CPU2006 license: 11

Test date: Jun-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Compiler Invocation (Continued)

471.omnetpp: icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)
 -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
 -opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll2 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation SPECint2006 = 33.1

IBM BladeCenter HS22V (Intel Xeon E5645) SPECint_base2006 = 30.4

CPU2006 license: 11	Test date: Jun-2010
Test sponsor: IBM Corporation	Hardware Availability: Sep-2010
Tested by: IBM Corporation	Software Availability: Jan-2010

Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap
```

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
           -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100603.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100603.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 11:58:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 August 2010.