



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 33.2

IBM System x3690 X5 (Intel Xeon E7540)

SPECfp_base2006 = 31.2

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2010

Hardware Availability: Aug-2010

Software Availability: Jan-2010

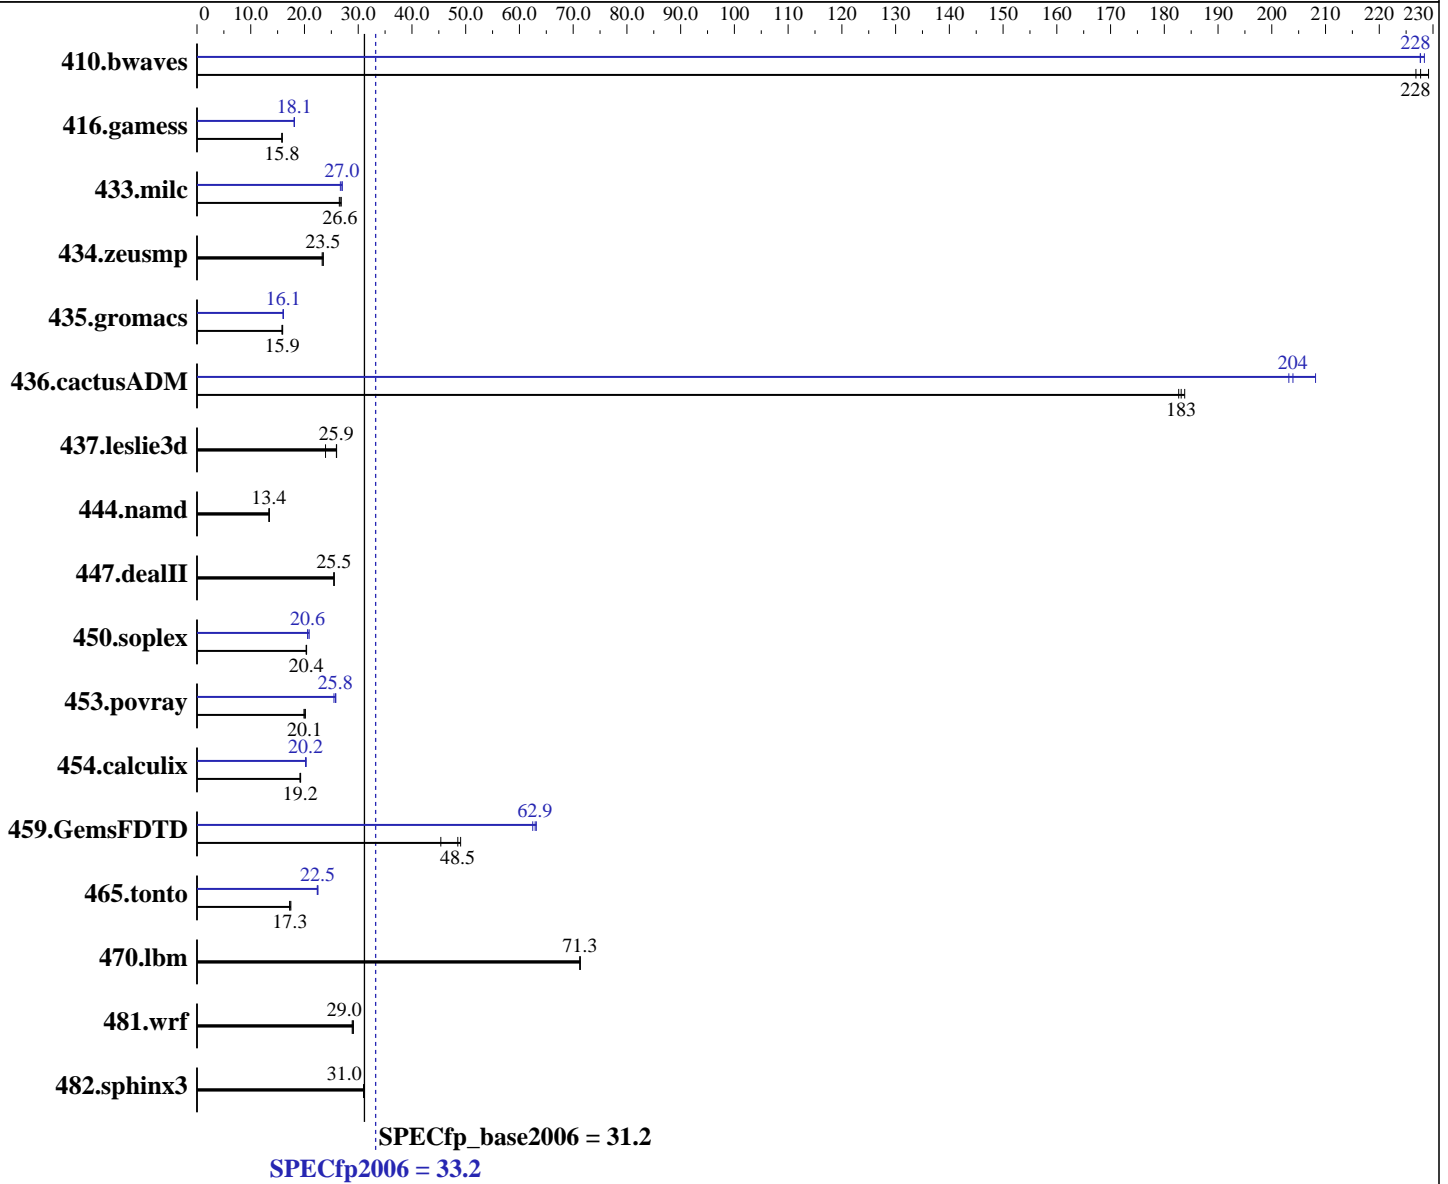

Hardware

CPU Name: Intel Xeon E7540
 CPU Characteristics: Intel Turbo Boost Technology up to 2.26 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SuSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1
 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 33.2

IBM System x3690 X5 (Intel Xeon E7540)

SPECfp_base2006 = 31.2

CPU2006 license: 11

Test date: Jul-2010

Test sponsor: IBM Corporation

Hardware Availability: Aug-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

L3 Cache: 18 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (32 x 4 GB PC3-8500R CL7, Quad Rank)
Disk Subsystem: 1 x 146 GB SAS, 15000 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	59.9	227	59.7	228	59.3	229	59.5	228	59.7	228	59.7	228
416.gamess	1235	15.8	1236	15.8	1240	15.8	1082	18.1	1082	18.1	1080	18.1
433.milc	347	26.5	342	26.9	345	26.6	340	27.0	340	27.0	344	26.7
434.zeusmp	391	23.3	387	23.5	388	23.5	391	23.3	387	23.5	388	23.5
435.gromacs	451	15.8	450	15.9	448	15.9	444	16.1	446	16.0	445	16.1
436.cactusADM	65.4	183	65.0	184	65.3	183	58.6	204	58.8	203	57.4	208
437.leslie3d	362	26.0	362	25.9	393	23.9	362	26.0	362	25.9	393	23.9
444.namd	598	13.4	598	13.4	596	13.5	598	13.4	598	13.4	596	13.5
447.dealII	449	25.5	448	25.5	448	25.5	449	25.5	448	25.5	448	25.5
450.soplex	411	20.3	409	20.4	409	20.4	399	20.9	405	20.6	405	20.6
453.povray	264	20.2	265	20.1	267	19.9	209	25.5	206	25.8	207	25.8
454.calculix	429	19.2	430	19.2	428	19.3	408	20.2	408	20.2	406	20.3
459.GemsFDTD	216	49.1	234	45.4	219	48.5	170	62.5	168	63.1	169	62.9
465.tonto	571	17.2	568	17.3	563	17.5	438	22.5	438	22.5	440	22.4
470.lbm	193	71.2	193	71.3	193	71.3	193	71.2	193	71.3	193	71.3
481.wrf	387	28.9	384	29.1	385	29.0	387	28.9	384	29.1	385	29.0
482.sphinx3	629	31.0	628	31.0	629	31.0	629	31.0	628	31.0	629	31.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
echo 1 > /proc/sys/vm/zone_reclaim_mode
```

Platform Notes

Turbo Boost set to Traditional

General Notes

```
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 33.2

IBM System x3690 X5 (Intel Xeon E7540)

SPECfp_base2006 = 31.2

CPU2006 license: 11

Test date: Jul-2010

Test sponsor: IBM Corporation

Hardware Availability: Aug-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 33.2

IBM System x3690 X5 (Intel Xeon E7540)

SPECfp_base2006 = 31.2

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2010

Hardware Availability: Aug-2010

Software Availability: Jan-2010

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -auto-ilp32

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 33.2

IBM System x3690 X5 (Intel Xeon E7540)

SPECfp_base2006 = 31.2

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2010

Hardware Availability: Aug-2010

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100603.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100603.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 12:22:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 31 August 2010.