



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint®\_rate2006 = 219

Servidor Itaotec MX214 (Intel Xeon X5680)

SPECint\_rate\_base2006 = 210

CPU2006 license: 9001


Test date: Dec-2011

Test sponsor: Itaotec

Hardware Availability: Jul-2011

Tested by: Itaotec

Software Availability: Dec-2011

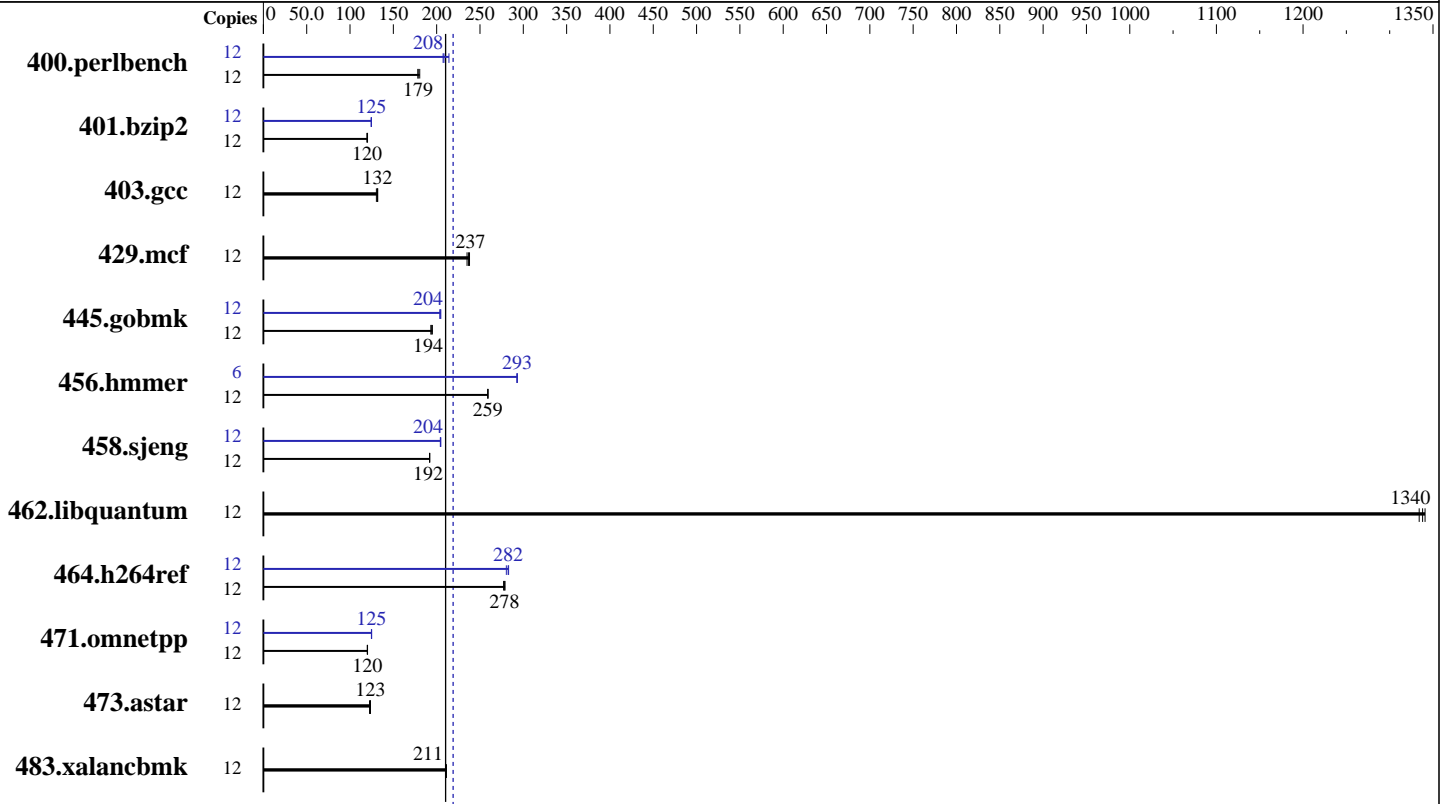

SPECint\_rate2006 = 219

SPECint\_rate\_base2006 = 210

## Hardware

CPU Name: Intel Xeon X5680  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 3333  
 FPU: Integrated  
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (6 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 146 GB, SAS, 15000 RPM  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 6.2  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0 of Intel Compiler XE  
 Build 20111011  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 219

Servidor Itaotec MX214 (Intel Xeon X5680)

SPECint\_rate\_base2006 = 210

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Dec-2011  
Hardware Availability: Jul-2011  
Software Availability: Dec-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	<b>657</b>	<b>179</b>	650	180	657	178	12	547	214	565	207	<b>562</b>	<b>208</b>
401.bzip2	12	963	120	968	120	<b>966</b>	<b>120</b>	12	931	124	<b>929</b>	<b>125</b>	928	125
403.gcc	12	<b>733</b>	<b>132</b>	741	130	732	132	12	<b>733</b>	<b>132</b>	741	130	732	132
429.mcf	12	466	235	<b>462</b>	<b>237</b>	460	238	12	466	235	<b>462</b>	<b>237</b>	460	238
445.gobmk	12	645	195	<b>649</b>	<b>194</b>	651	193	12	<b>616</b>	<b>204</b>	618	204	615	205
456.hammer	12	<b>432</b>	<b>259</b>	432	259	432	259	6	191	293	<b>191</b>	<b>293</b>	191	293
458.sjeng	12	757	192	756	192	<b>757</b>	<b>192</b>	12	<b>710</b>	<b>204</b>	709	205	711	204
462.libquantum	12	185	1340	186	1330	<b>186</b>	<b>1340</b>	12	185	1340	186	1330	<b>186</b>	<b>1340</b>
464.h264ref	12	<b>955</b>	<b>278</b>	952	279	958	277	12	938	283	947	280	<b>940</b>	<b>282</b>
471.omnetpp	12	624	120	<b>625</b>	<b>120</b>	625	120	12	600	125	601	125	<b>601</b>	<b>125</b>
473.astar	12	687	123	<b>682</b>	<b>123</b>	682	124	12	687	123	<b>682</b>	<b>123</b>	682	124
483.xalancbmk	12	<b>392</b>	<b>211</b>	392	211	394	210	12	<b>392</b>	<b>211</b>	392	211	394	210

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.  
Large pages were not enabled for this run

## Platform Notes

Data Reuse disabled in BIOS.

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 219

Servidor Itautec MX214 (Intel Xeon X5680)

SPECint\_rate\_base2006 = 210

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Dec-2011  
Hardware Availability: Jul-2011  
Software Availability: Dec-2011

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/home/rcaneca/sh/SmartHeap\_8.1/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32  
400.perlbench: icc -m64  
401.bzip2: icc -m64  
456.hmmmer: icc -m64  
458.sjeng: icc -m64  
C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 219

Servidor Itaotec MX214 (Intel Xeon X5680)

SPECint\_rate\_base2006 = 210

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Dec-2011  
Hardware Availability: Jul-2011  
Software Availability: Dec-2011

## Peak Portability Flags (Continued)

462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalanbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/home/rcaneca/sh/SmartHeap\_8.1/lib -lsmarheap

473.astar: basepeak = yes

483.xalanbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 219

Servidor Itautec MX214 (Intel Xeon X5680)

SPECint\_rate\_base2006 = 210

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Dec-2011  
Hardware Availability: Jul-2011  
Software Availability: Dec-2011

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/Itautec-Servidor\\_Itautec-Intel-Linux-Platform.html](http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.html)  
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/Itautec-Servidor\\_Itautec-Intel-Linux-Platform.xml](http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.xml)  
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 03:46:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 February 2012.