



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen8  
(2.00 GHz, Intel Xeon E5-2630L)

**SPECint\_rate2006 = 393**

**SPECint\_rate\_base2006 = 377**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

**Test date:** Apr-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Mar-2012

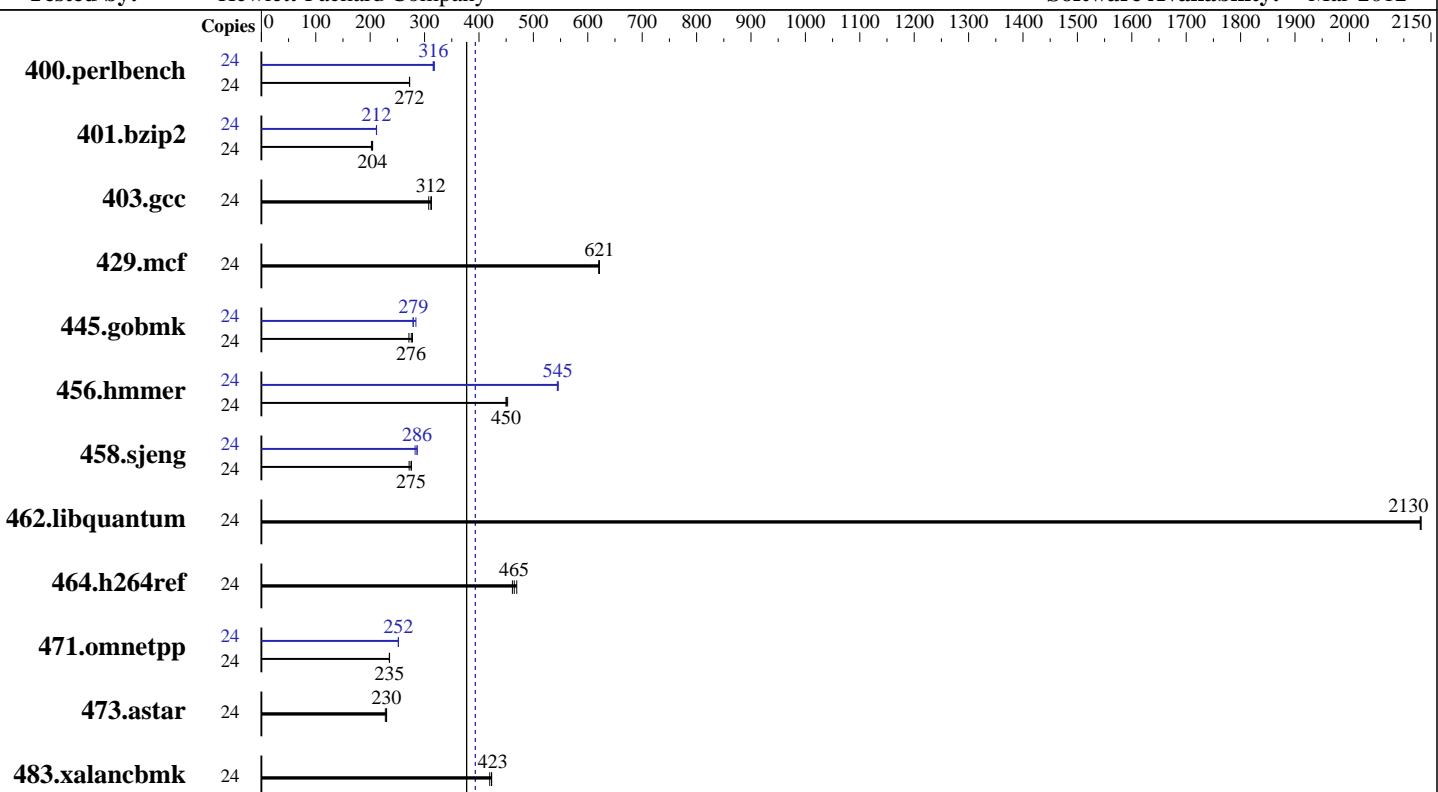

**SPECint\_rate\_base2006 = 377**

**SPECint\_rate2006 = 393**

### Hardware

CPU Name:	Intel Xeon E5-2630L
CPU Characteristics:	Intel Turbo Boost Technology up to 2.50 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	15 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL9)
Disk Subsystem:	2 x 146 GB 15 K SAS, RAID 1
Other Hardware:	None

### Software

Operating System:	Red Hat Enterprise Linux Server release 6.2, (Santiago) Kernel 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01 HP Array Configuration Utility, CLI version



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen8  
(2.00 GHz, Intel Xeon E5-2630L)

**SPECint\_rate2006 = 393**

**SPECint\_rate\_base2006 = 377**

CPU2006 license: 3

Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Mar-2012

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	862	272	860	273	<b>861</b>	<b>272</b>	24	<b>741</b>	<b>316</b>	737	318	742	316
401.bzip2	24	1133	204	<b>1135</b>	<b>204</b>	1145	202	24	1094	212	<b>1094</b>	<b>212</b>	1095	211
403.gcc	24	618	313	628	308	<b>620</b>	<b>312</b>	24	618	313	628	308	<b>620</b>	<b>312</b>
429.mcf	24	<b>352</b>	<b>621</b>	352	621	353	620	24	<b>352</b>	<b>621</b>	352	621	353	620
445.gobmk	24	928	271	906	278	<b>914</b>	<b>276</b>	24	886	284	903	279	<b>901</b>	<b>279</b>
456.hammer	24	<b>497</b>	<b>450</b>	495	453	498	450	24	<b>411</b>	<b>545</b>	410	546	412	544
458.sjeng	24	1053	276	1069	272	<b>1056</b>	<b>275</b>	24	1028	283	<b>1015</b>	<b>286</b>	1014	286
462.libquantum	24	<b>233</b>	<b>2130</b>	233	2130	233	2130	24	<b>233</b>	<b>2130</b>	233	2130	233	2130
464.h264ref	24	1151	461	<b>1143</b>	<b>465</b>	1131	469	24	1151	461	<b>1143</b>	<b>465</b>	1131	469
471.omnetpp	24	<b>637</b>	<b>235</b>	637	236	638	235	24	<b>595</b>	<b>252</b>	595	252	596	252
473.astar	24	<b>733</b>	<b>230</b>	732	230	739	228	24	<b>733</b>	<b>230</b>	732	230	739	228
483.xalancbmk	24	391	423	<b>391</b>	<b>423</b>	395	420	24	391	423	<b>391</b>	<b>423</b>	395	420

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Drive Write Cache set to Enabled in HP Array Configuration Utility, CLI version  
Accelerator Ratio for Reads/Writes set to = 100% Read / 0% Write in HP Array Configuration Utility, CLI version

## Platform Notes

BIOS Configuration:

HP Power Profile set to Custom

Energy/Performance Bias is set to Maximum Performance

Thermal Configuration set to Maximum Cooling

Collaborative Power Control set to Disabled

Processor Power and Utilization Monitoring set to Disabled

Sysinfo program /cpu2006/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date::: 2011-10-11 #\\$ 6f2ebdff5032aaa42e583f96b07f99d3

running on rh62 Thu Apr 12 15:19:36 2012

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen8  
(2.00 GHz, Intel Xeon E5-2630L)

**SPECint\_rate2006 = 393**

**SPECint\_rate\_base2006 = 377**

**CPU2006 license:** 3

**Test date:** Apr-2012

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2012

**Tested by:** Hewlett-Packard Company

**Software Availability:** Mar-2012

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2630L 0 @ 2.00GHz
        2 "physical id"s (chips)
        24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 6
    siblings : 12
    physical 0: cores 0 1 2 3 4 5
    physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      132120004 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux rh62 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 12 15:08
```

```
SPEC is set to: /cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_rh62-lv_root
                ext4   50G   17G   30G  37%  /
```

```
Additional information from dmidecode:
BIOS HP I31 02/13/2012
Memory:
16x Not Specified Not Specified 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen8  
(2.00 GHz, Intel Xeon E5-2630L)

**SPECint\_rate2006 = 393**

**SPECint\_rate\_base2006 = 377**

CPU2006 license: 3

Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Mar-2012

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/cpu2006/libss2/32:/cpu2006/libss2/64"

Binaries compiled on a system with 2x Xeon E5-2667 CPU + 256GB  
memory using SLES11 SP2,RC3

## Base Compiler Invocation

C benchmarks:

  icc -m32

C++ benchmarks:

  icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

  -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

  -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
  -Wl,-z,muldefs -L/spec/libss2/32 -lsmartheap

## Base Other Flags

C benchmarks:

  403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

  icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen8  
(2.00 GHz, Intel Xeon E5-2630L)

**SPECint\_rate2006 = 393**

**SPECint\_rate\_base2006 = 377**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Apr-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Mar-2012

## Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`  
`-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll14 -auto-ilp32`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen8  
(2.00 GHz, Intel Xeon E5-2630L)

**SPECint\_rate2006 = 393**

**SPECint\_rate\_base2006 = 377**

**CPU2006 license:** 3

**Test date:** Apr-2012

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2012

**Tested by:** Hewlett-Packard Company

**Software Availability:** Mar-2012

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/spec/libs2/32 -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120425.html>  
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120425.xml>  
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 05:01:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 May 2012.