



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228  
AMD Opteron 4230 HE

SPECint®\_rate2006 = 233

SPECint\_rate\_base2006 = 203

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Mar-2012

Hardware Availability: Jun-2012

Software Availability: Jul-2011

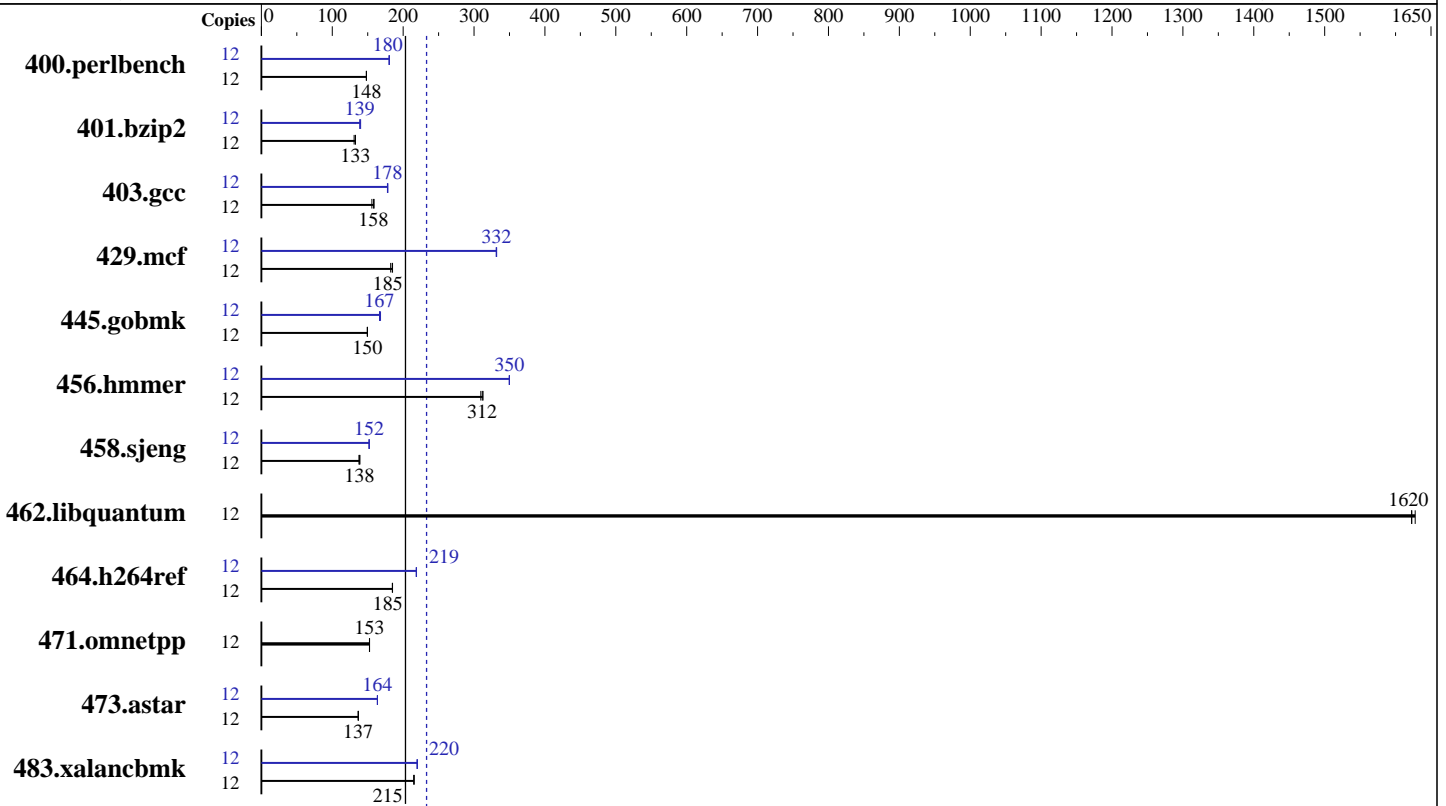

SPECint\_rate2006 = 233

SPECint\_rate\_base2006 = 203

### Hardware

CPU Name: AMD Opteron 4230 HE  
 CPU Characteristics: AMD Turbo CORE technology up to 3.70 GHz  
 CPU MHz: 2900  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 192 KB I on chip per chip,  
 64 KB I shared / 2 cores;  
 16 KB D on chip per core  
 Secondary Cache: 6 MB I+D on chip per chip, 2 MB shared / 2 cores  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (4 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 128 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.1,  
 Kernel 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++: Version 4.5.1 of x86 Open64 Compiler Suite  
 (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 10.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228  
AMD Opteron 4230 HE

SPECint\_rate2006 = 233

SPECint\_rate\_base2006 = 203

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Mar-2012

Hardware Availability: Jun-2012

Software Availability: Jul-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	791	148	791	148	<u>791</u>	<u>148</u>	12	650	180	651	180	<u>650</u>	<u>180</u>
401.bzip2	12	873	133	<u>873</u>	<u>133</u>	885	131	12	<u>832</u>	<u>139</u>	827	140	834	139
403.gcc	12	620	156	<u>610</u>	<u>158</u>	608	159	12	543	178	541	178	<u>543</u>	<u>178</u>
429.mcf	12	<u>593</u>	<u>185</u>	600	182	591	185	12	330	332	330	331	<u>330</u>	<u>332</u>
445.gobmk	12	842	150	<u>842</u>	<u>150</u>	842	150	12	749	168	<u>755</u>	<u>167</u>	755	167
456.hammer	12	<u>359</u>	<u>312</u>	362	310	358	313	12	320	350	<u>320</u>	<u>350</u>	320	350
458.sjeng	12	1054	138	<u>1051</u>	<u>138</u>	1044	139	12	954	152	<u>955</u>	<u>152</u>	955	152
462.libquantum	12	<u>153</u>	<u>1620</u>	153	1620	153	1630	12	<u>153</u>	<u>1620</u>	153	1620	153	1630
464.h264ref	12	1435	185	1437	185	<u>1436</u>	<u>185</u>	12	1213	219	1216	218	<u>1214</u>	<u>219</u>
471.omnetpp	12	<u>492</u>	<u>153</u>	492	153	492	152	12	<u>492</u>	<u>153</u>	492	153	492	152
473.astar	12	616	137	<u>616</u>	<u>137</u>	616	137	12	<u>515</u>	<u>164</u>	515	164	514	164
483.xalancbmk	12	385	215	385	215	<u>385</u>	<u>215</u>	12	<u>377</u>	<u>220</u>	377	220	376	220

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.

Set kernel/randomize\_va\_space=0 in /etc/sysctl.conf

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/work/cpu2006v1.2/amd1104-rate-libs-revC/32:/root/work/cpu2006v1.2/amd1104-rate-libs-revC/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6274 chips + 64GB Memory using RHEL 6.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Tyan**

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228  
AMD Opteron 4230 HE

**SPECint\_rate2006 = 233**

**SPECint\_rate\_base2006 = 203**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Mar-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Jul-2011

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-march=bdver1 -Ofast -CG:local\_sched\_alg=1 -INLINE:aggressive=ON  
-IPA:plimit=8000 -IPA:small\_pu=100 -HP:bd=2m:heap=2m -mso  
-LNO:prefetch=2

C++ benchmarks:  
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on  
-D\_\_OPEN64\_FAST\_SET -L/root/work/libraries/SmartHeap-10/lib -lsmarheap

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Tyan**

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228  
AMD Opteron 4230 HE

**SPECint\_rate2006 = 233**

**SPECint\_rate\_base2006 = 203**

**CPU2006 license:** 49  
**Test sponsor:** Advanced Micro Devices  
**Tested by:** Advanced Micro Devices

**Test date:** Mar-2012  
**Hardware Availability:** Jun-2012  
**Software Availability:** Jul-2011

## Peak Portability Flags (Continued)

401.bzip2: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0  
-IPA:plimit=20000 -OPT:unroll\_times\_max=8  
-OPT:unroll\_size=256 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
-WOPT:if\_conv=0 -WOPT:sib=on -CG:local\_sched\_alg=1  
-CG:unroll\_fb\_req=on -CG:movext\_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0  
-OPT:alias=disjoint -OPT:goto=off -CG:local\_sched\_alg=1  
-HP:bd=2m:heap=2m

403.gcc: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:trip\_count=256  
-CG:cmp\_peep=on -CG:pre\_minreg\_level=2 -m32  
-HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small\_pu=200  
-WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll\_times\_max=5 -ipa  
-INLINE:aggressive=on -CG:gcm=off -CG:dsched=on  
-GRA:prioritize\_by\_density=on -m32 -HP:bd=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:unroll\_size=256  
-OPT:unroll\_times\_max=8 -OPT:keep\_ext=on -IPA:plimit=750  
-IPA:min\_hotness=300 -IPA:pu\_reorder=1  
-LNO:ignore\_feedback=off -WOPT:if\_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=2  
-OPT:alias=disjoint -OPT:unroll\_times\_max=16  
-OPT:unroll\_size=512 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
-CG:cflow=0 -CG:cmp\_peep=on -CG:pre\_local\_sched=off  
-HP:bd=2m:heap=2m

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Tyan**

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228  
AMD Opteron 4230 HE

**SPECint\_rate2006 = 233**

**SPECint\_rate\_base2006 = 203**

**CPU2006 license:** 49  
**Test sponsor:** Advanced Micro Devices  
**Tested by:** Advanced Micro Devices

**Test date:** Mar-2012  
**Hardware Availability:** Jun-2012  
**Software Availability:** Jul-2011

## Peak Optimization Flags (Continued)

458.sjeng: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -CG:ptr\_load\_use=0  
-CG:divrem\_opt=on -CG:movext\_icmp=off -CG:locs\_best=on  
-LNO:full\_unroll=10 -IPA:pu\_reorder=2 -HP:heap=2m:bd=2m  
-WOPT:sib=on

462.libquantum: basepeak = yes

464.h264ref: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -OPT:unroll\_size=256  
-OPT:unroll\_times\_max=2 -IPA:plimit=20000  
-OPT:alias=disjoint -CG:ptr\_load\_use=0  
-CG:local\_sched\_alg=1 -HP:bd=2m:heap=2m

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -TENV:frame\_pointer=off  
-WOPT:if\_conv=0 -WOPT:sib=on -CG:divrem\_opt=on  
-CG:p2align=1 -CG:dsched=on -GRA:optimize\_boundary=on  
-OPT:alias=disjoint -INLINE:aggressive=on  
-IPA:small\_pu=3000 -IPA:plimit=3000 -m32  
-HP:bd=2m:heap=2m

483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll\_size=512  
-OPT:unroll\_times\_max=8 -D\_\_OPEN64\_FAST\_SET  
-INLINE:aggressive=on -m32 -CG:cmp\_peep=on  
-CG:local\_sched=off -CG:p2align=1 -GRA:unspill=on  
-TENV:frame\_pointer=off -fno-emit-exceptions  
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC-I.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC-I.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Tyan**

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228  
AMD Opteron 4230 HE

**SPECint\_rate2006 = 233**

**SPECint\_rate\_base2006 = 203**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Mar-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Jul-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 04:24:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 6 June 2012.