



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = 210

PowerEdge R320 (Intel Xeon E5-2470, 2.30 GHz)

SPECfp_rate_base2006 = 203

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

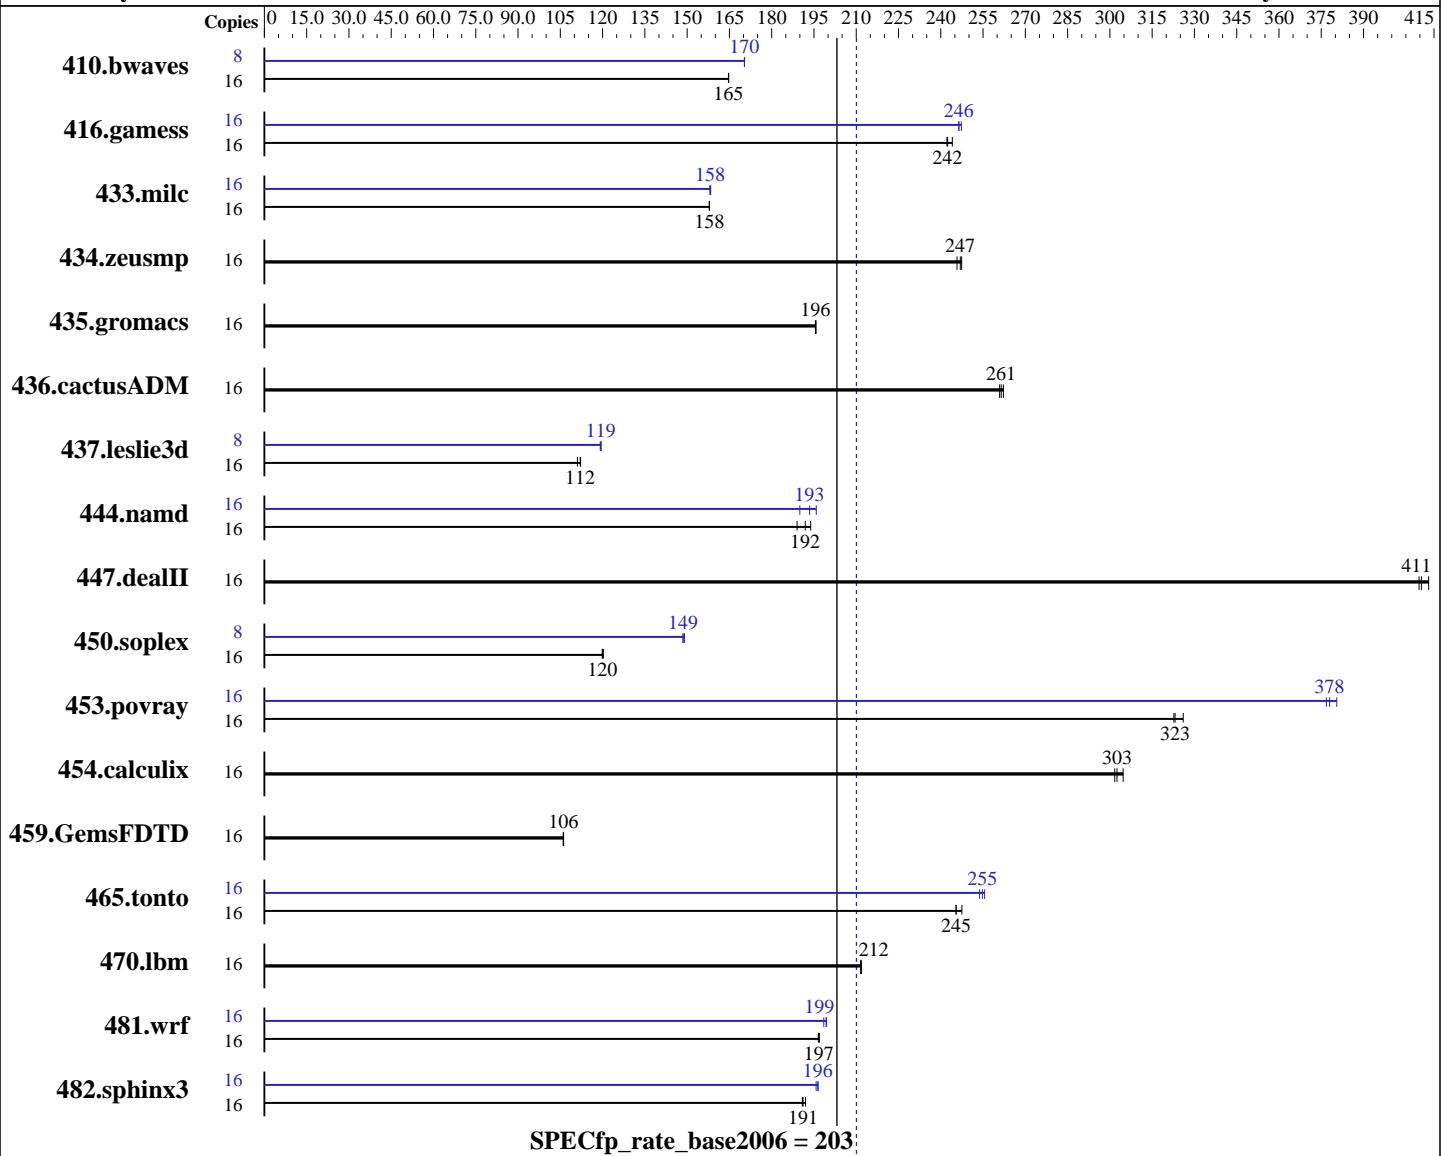

Hardware

CPU Name: Intel Xeon E5-2470
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 8 cores, 1 chip, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86_64)
 3.0.13-0.9-default
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE
 for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran
 Studio XE for Linux
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (add definition here)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 210

PowerEdge R320 (Intel Xeon E5-2470, 2.30 GHz)

SPECfp_rate_base2006 = 203

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (3 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 2 x 300 GB 15000 RPM SAS, RAID 1
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1320	165	<u>1320</u>	<u>165</u>	1320	165	8	<u>638</u>	<u>170</u>	638	170	638	170
416.gamess	16	1283	244	<u>1292</u>	<u>242</u>	1294	242	16	1272	246	<u>1271</u>	<u>246</u>	1267	247
433.milc	16	<u>930</u>	<u>158</u>	930	158	931	158	16	927	<u>158</u>	929	158	<u>928</u>	<u>158</u>
434.zeusmp	16	<u>590</u>	<u>247</u>	592	246	589	247	16	<u>590</u>	<u>247</u>	592	246	589	247
435.gromacs	16	584	196	584	196	<u>584</u>	<u>196</u>	16	584	196	584	196	<u>584</u>	<u>196</u>
436.cactusADM	16	<u>731</u>	<u>261</u>	729	262	733	261	16	<u>731</u>	<u>261</u>	729	262	733	261
437.leslie3d	16	1354	111	<u>1342</u>	<u>112</u>	1340	112	8	631	119	<u>630</u>	<u>119</u>	630	119
444.namd	16	662	194	<u>669</u>	<u>192</u>	679	189	16	675	190	655	196	<u>663</u>	<u>193</u>
447.dealII	16	447	410	443	413	<u>446</u>	<u>411</u>	16	447	410	443	413	<u>446</u>	<u>411</u>
450.soplex	16	1109	120	<u>1112</u>	<u>120</u>	1113	120	8	449	149	448	149	<u>449</u>	<u>149</u>
453.povray	16	264	323	261	326	<u>263</u>	<u>323</u>	16	226	377	224	381	<u>225</u>	<u>378</u>
454.calculix	16	<u>436</u>	<u>303</u>	437	302	433	305	16	<u>436</u>	<u>303</u>	437	302	433	305
459.GemsFDTD	16	1601	106	<u>1600</u>	<u>106</u>	1599	106	16	1601	106	<u>1600</u>	<u>106</u>	1599	106
465.tonto	16	636	247	642	245	<u>641</u>	<u>245</u>	16	<u>618</u>	<u>255</u>	620	254	616	256
470.lbm	16	1038	212	1039	212	<u>1039</u>	<u>212</u>	16	1038	212	1039	212	<u>1039</u>	<u>212</u>
481.wrf	16	<u>908</u>	<u>197</u>	909	197	908	197	16	900	198	<u>897</u>	<u>199</u>	896	199
482.sphinx3	16	1634	191	<u>1631</u>	<u>191</u>	1624	192	16	<u>1593</u>	<u>196</u>	<u>1588</u>	<u>196</u>	1587	196

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

CPU Power Management set to Maximum Performance
 Memory Frequency set to Maximum Performance
 Turbo Boost set to Enabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 210

PowerEdge R320 (Intel Xeon E5-2470, 2.30 GHz)

SPECfp_rate_base2006 = 203

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Platform Notes (Continued)

```
C States/C1E set to Enabled
Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on Defy Fri Mar 30 22:02:00 2012
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2470 0 @ 2.30GHz
        1 "physical id"s (chips)
        16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      24559976 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2
```

```
uname -a:
Linux Defy 3.0.13-0.9-default #1 SMP Mon Jan 16 17:33:03 UTC 2012 (54ddfaf)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 30 09:32 last=S
```

```
SPEC is set to: /root/CPU2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal      ext3  266G   26G  228G  10%  /
```

Additional information from dmidecode:

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 210

PowerEdge R320 (Intel Xeon E5-2470, 2.30 GHz)

SPECfp_rate_base2006 = 203

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R320 (Intel Xeon E5-2470, 2.30 GHz)

SPECfp_rate2006 = 210

SPECfp_rate_base2006 = 203

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3:

```
icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex:

```
icpc -m32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

410.bwaves:

```
-DSPEC_CPU_LP64
```


416.gamess:

```
-DSPEC_CPU_LP64
```


433.milc:

```
-DSPEC_CPU_LP64
```


434.zeusmp:

```
-DSPEC_CPU_LP64
```


435.gromacs:

```
-DSPEC_CPU_LP64 -nofor_main
```


436.cactusADM:

```
-DSPEC_CPU_LP64 -nofor_main
```


437.leslie3d:

```
-DSPEC_CPU_LP64
```


444.namd:

```
-DSPEC_CPU_LP64
```


447.dealII:

```
-DSPEC_CPU_LP64
```


453.povray:

```
-DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R320 (Intel Xeon E5-2470, 2.30 GHz)

SPECfp_rate2006 = 210

SPECfp_rate_base2006 = 203

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

Peak Portability Flags (Continued)

```
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
           -opt-mem-layout-trans=3
```

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

447.dealII: basepeak = yes

```
450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
```

```
453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -static
```

```
416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
           -inline-level=0 -scalar-rep- -static
```

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R320 (Intel Xeon E5-2470, 2.30 GHz)

SPECfp_rate2006 = 210

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

```
465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto
           -inline-calloc -opt-malloc-options=3
```

Benchmarks using both Fortran and C:

```
435.gromacs: basepeak = yes
```

```
436.cactusADM: basepeak = yes
```

```
454.calculix: basepeak = yes
```

```
481.wrf: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
          -opt-mem-layout-trans=3
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 05:59:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 June 2012.