



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX100 S7p, Intel Xeon E3-1265L v2, 2.50 GHz

SPECfp<sup>®</sup>\_rate2006 = 130

SPECfp\_rate\_base2006 = 126

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

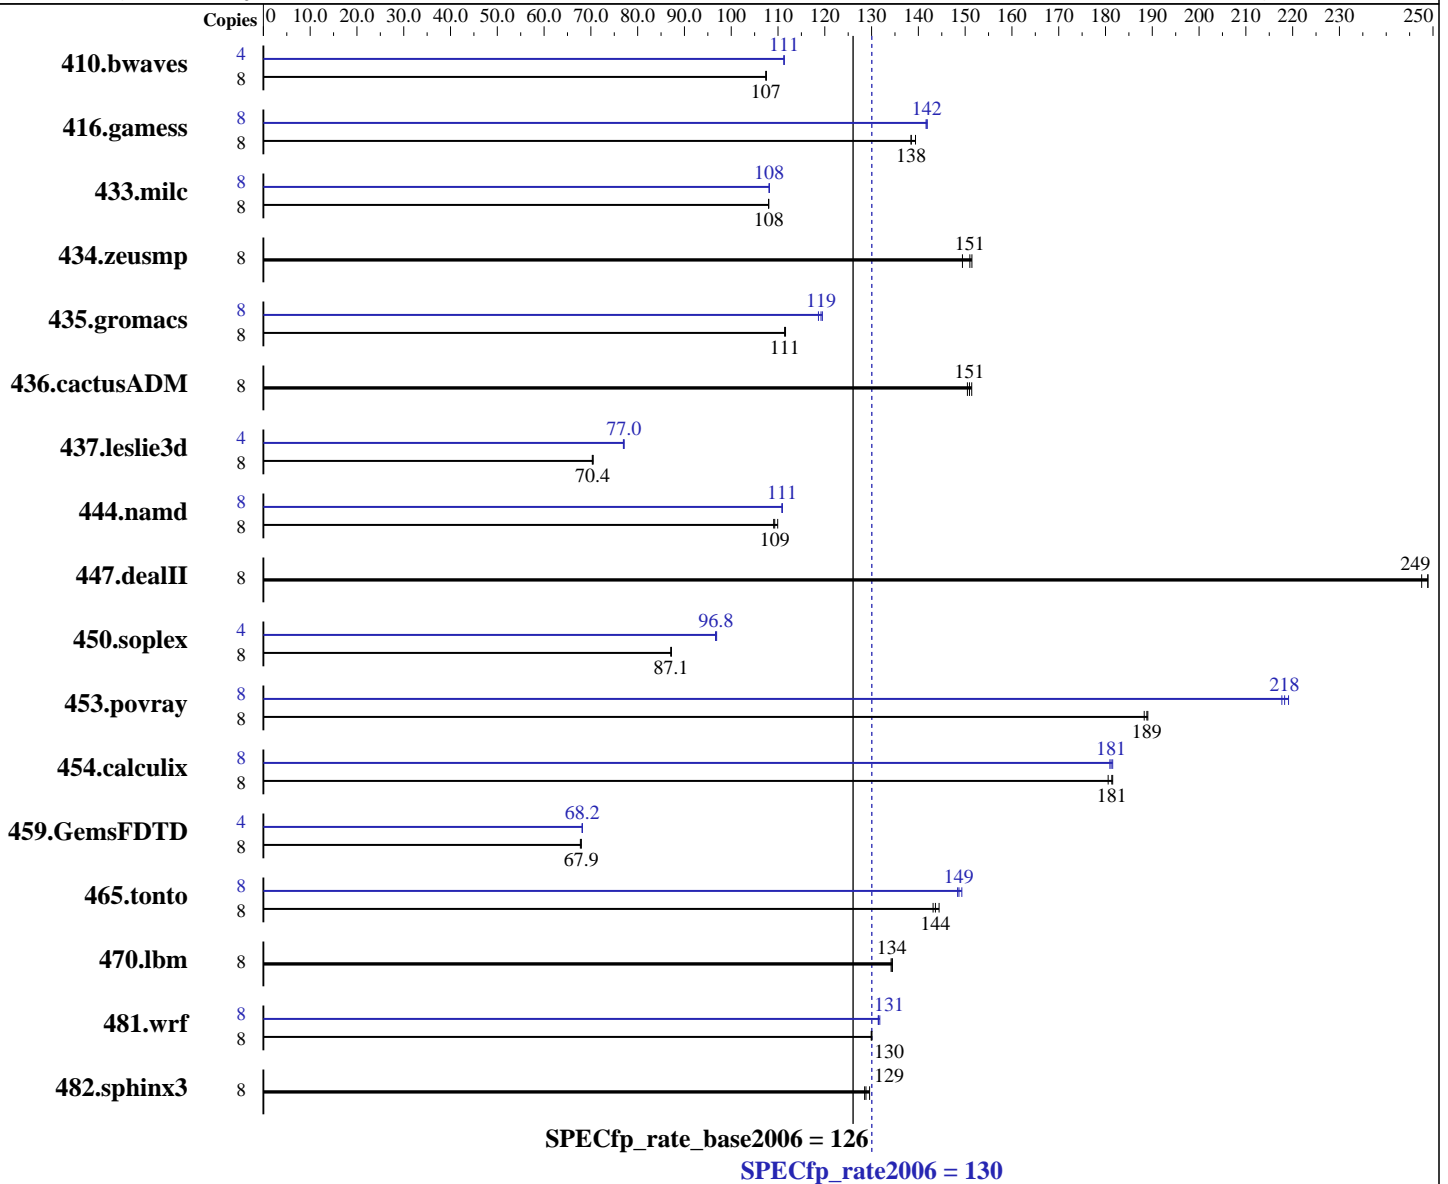

### Hardware

CPU Name: Intel Xeon E3-1265L v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.5 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.293 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.293 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX100 S7p, Intel Xeon E3-1265L v2, 2.50 GHz

SPECfp\_rate2006 = 130

SPECfp\_rate\_base2006 = 126

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)  
Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	<b>1012</b>	<b>107</b>	1011	108	1012	107	4	<b>488</b>	<b>111</b>	488	111	488	111
416.gamess	8	1131	138	<b>1131</b>	<b>138</b>	1124	139	8	1104	142	1106	142	<b>1105</b>	<b>142</b>
433.milc	8	680	108	680	108	<b>680</b>	<b>108</b>	8	<b>679</b>	<b>108</b>	679	108	679	108
434.zeusmp	8	<b>482</b>	<b>151</b>	487	149	481	151	8	<b>482</b>	<b>151</b>	487	149	481	151
435.gromacs	8	512	112	513	111	<b>513</b>	<b>111</b>	8	<b>479</b>	<b>119</b>	478	119	481	119
436.cactusADM	8	631	151	635	150	<b>633</b>	<b>151</b>	8	631	151	635	150	<b>633</b>	<b>151</b>
437.leslie3d	8	1067	70.5	<b>1068</b>	<b>70.4</b>	1070	70.3	4	489	76.9	488	77.1	<b>488</b>	<b>77.0</b>
444.namd	8	584	110	588	109	<b>587</b>	<b>109</b>	8	<b>578</b>	<b>111</b>	578	111	579	111
447.dealII	8	370	248	368	249	<b>368</b>	<b>249</b>	8	370	248	368	249	<b>368</b>	<b>249</b>
450.soplex	8	765	87.2	766	87.1	<b>766</b>	<b>87.1</b>	4	<b>345</b>	<b>96.8</b>	345	96.6	344	96.9
453.povray	8	225	189	226	188	<b>225</b>	<b>189</b>	8	196	218	<b>195</b>	<b>218</b>	194	219
454.calculix	8	366	181	<b>364</b>	<b>181</b>	364	182	8	365	181	<b>364</b>	<b>181</b>	364	182
459.GemsFDTD	8	1253	67.8	1249	67.9	<b>1250</b>	<b>67.9</b>	4	<b>623</b>	<b>68.2</b>	623	68.2	622	68.2
465.tonto	8	<b>548</b>	<b>144</b>	550	143	545	144	8	531	148	527	149	<b>529</b>	<b>149</b>
470.lbm	8	818	134	819	134	<b>818</b>	<b>134</b>	8	818	134	819	134	<b>818</b>	<b>134</b>
481.wrf	8	<b>687</b>	<b>130</b>	688	130	687	130	8	680	131	<b>680</b>	<b>131</b>	678	132
482.sphinx3	8	1203	130	1213	129	<b>1211</b>	<b>129</b>	8	1203	130	1213	129	<b>1211</b>	<b>129</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX100 S7p, Intel Xeon E3-1265L v2, 2.50 GHz

SPECfp\_rate2006 = 130

SPECfp\_rate\_base2006 = 126

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: May-2012  
Hardware Availability: May-2012  
Software Availability: Feb-2012

### General Notes (Continued)

Binaries compiled on a system with 2x E5-2650 CPU + 96 GB memory using RHEL6.2  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
For information about Fujitsu please visit: <http://www.fujitsu.com>

### Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

### Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX100 S7p, Intel Xeon E3-1265L v2, 2.50 GHz

SPECfp\_rate2006 = 130

SPECfp\_rate\_base2006 = 126

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

## Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX100 S7p, Intel Xeon E3-1265L v2, 2.50 GHz

**SPECfp\_rate2006 = 130**

**SPECfp\_rate\_base2006 = 126**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** May-2012  
**Hardware Availability:** May-2012  
**Software Availability:** Feb-2012

## Peak Portability Flags (Continued)

482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX100 S7p, Intel Xeon E3-1265L v2, 2.50 GHz

SPECfp\_rate2006 = 130

SPECfp\_rate\_base2006 = 126

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: May-2012  
Hardware Availability: May-2012  
Software Availability: Feb-2012

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-auto-p32 -ansi-alias -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 06:24:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 June 2012.