



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6284 SE)

SPECfp<sup>®</sup>\_rate2006 = 209

SPECfp\_rate\_base2006 = 191

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

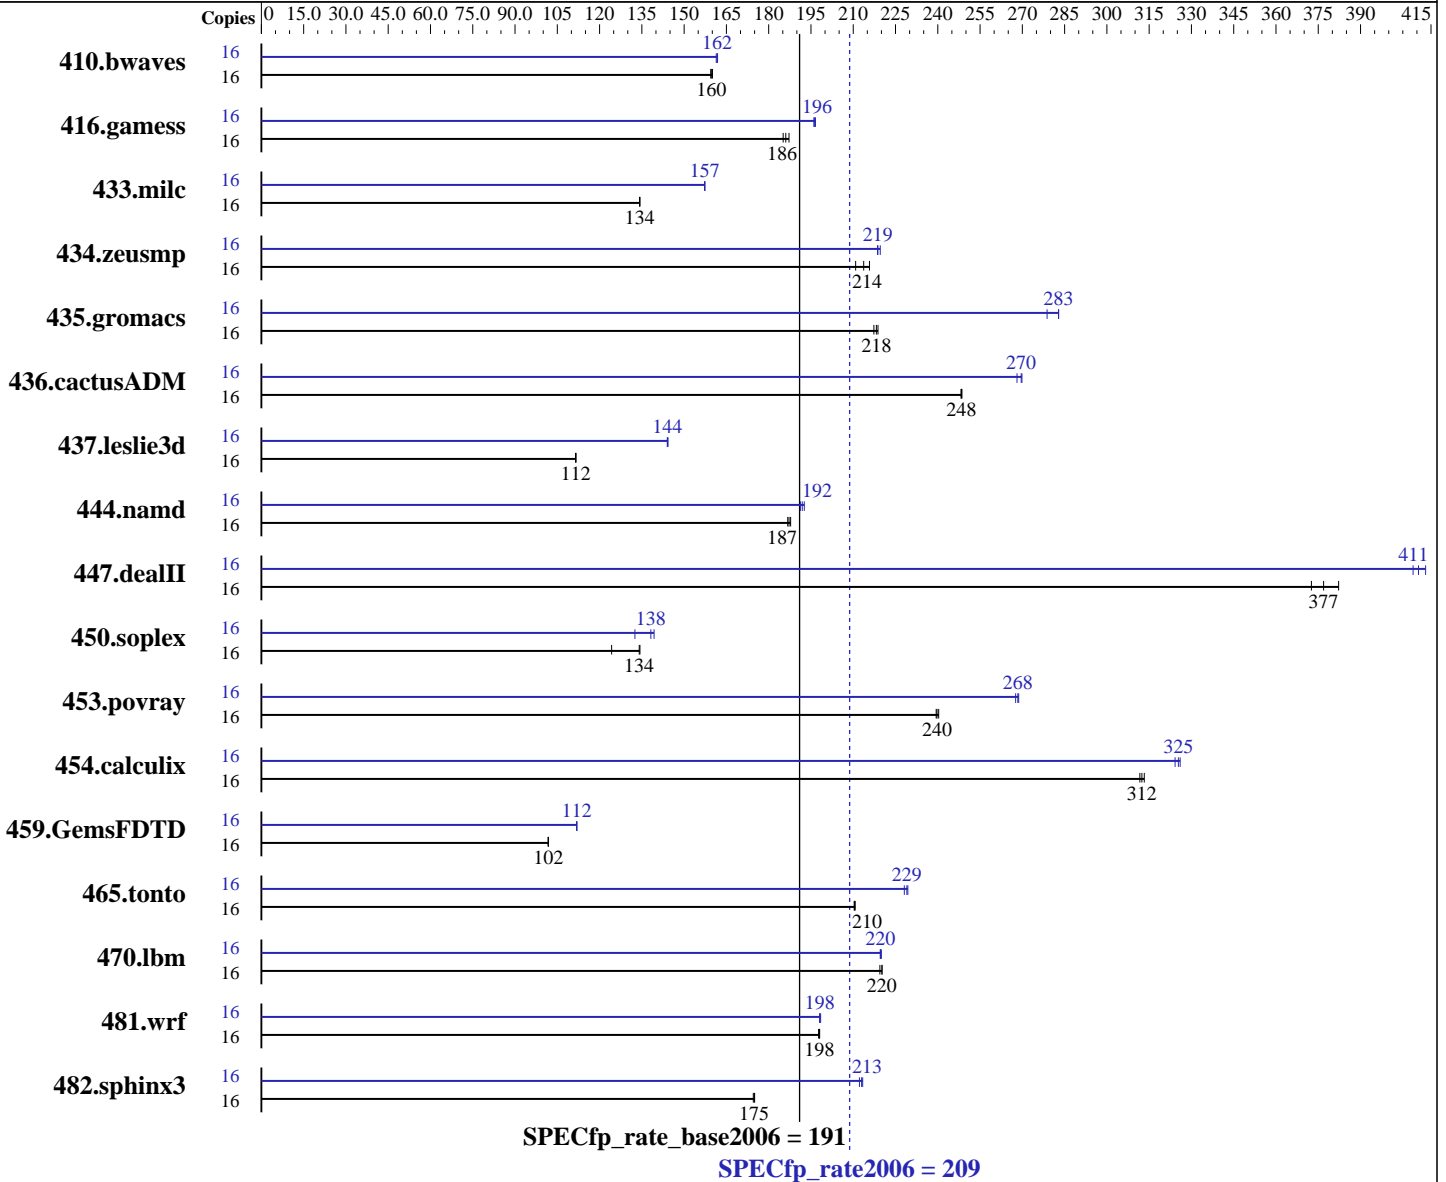

### Hardware

CPU Name: AMD Opteron 6284 SE  
 CPU Characteristics: AMD Turbo CORE technology up to 3.40 GHz  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 1 chip, 16 cores/chip  
 CPU(s) orderable: 1 chip

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2,  
Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++/Fortran: Version 4.5.1 of x86 Open64  
Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6284 SE)

SPECfp\_rate2006 = 209

SPECfp\_rate\_base2006 = 191

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

Primary Cache: 512 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core

Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores

Other Cache: None

Memory: 64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 1 x 300 GB SATA, 10000 RPM

Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1364	159	<u>1362</u>	<u>160</u>	1358	160	16	1343	162	1347	161	<u>1345</u>	<u>162</u>
416.gamess	16	<u>1684</u>	<u>186</u>	1692	185	1673	187	16	1593	197	1598	196	<u>1596</u>	<u>196</u>
433.milc	16	1095	134	<u>1094</u>	<u>134</u>	1094	134	16	934	157	<u>934</u>	<u>157</u>	934	157
434.zeusmp	16	<u>681</u>	<u>214</u>	691	211	675	216	16	663	220	666	219	<u>666</u>	<u>219</u>
435.gromacs	16	522	219	<u>524</u>	<u>218</u>	526	217	16	404	283	410	279	<u>404</u>	<u>283</u>
436.cactusADM	16	769	249	<u>770</u>	<u>248</u>	770	248	16	709	270	<u>709</u>	<u>270</u>	713	268
437.leslie3d	16	1348	112	1349	111	<u>1348</u>	<u>112</u>	16	<u>1044</u>	<u>144</u>	1044	144	1042	144
444.namd	16	687	187	<u>685</u>	<u>187</u>	683	188	16	671	191	<u>669</u>	<u>192</u>	666	193
447.dealII	16	479	382	491	373	<u>486</u>	<u>377</u>	16	443	413	<u>446</u>	<u>411</u>	448	409
450.soplex	16	1074	124	<u>995</u>	<u>134</u>	993	134	16	1007	133	<u>966</u>	<u>138</u>	958	139
453.povray	16	354	240	<u>355</u>	<u>240</u>	356	239	16	317	269	<u>317</u>	<u>268</u>	318	268
454.calculix	16	423	312	<u>423</u>	<u>312</u>	421	313	16	<u>406</u>	<u>325</u>	407	324	405	326
459.GemsFDTD	16	1667	102	1669	102	<u>1667</u>	<u>102</u>	16	1517	112	<u>1517</u>	<u>112</u>	1517	112
465.tonto	16	747	211	748	210	<u>748</u>	<u>210</u>	16	686	229	690	228	<u>687</u>	<u>229</u>
470.lbm	16	998	220	<u>998</u>	<u>220</u>	1002	219	16	<u>1001</u>	<u>220</u>	999	220	1001	220
481.wrf	16	902	198	<u>902</u>	<u>198</u>	904	198	16	901	198	<u>902</u>	<u>198</u>	902	198
482.sphinx3	16	1787	175	<u>1783</u>	<u>175</u>	1782	175	16	1462	213	1470	212	<u>1464</u>	<u>213</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6284 SE)

SPECfp\_rate2006 = 209

SPECfp\_rate\_base2006 = 191

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

## Operating System Notes (Continued)

```
Set vm/nr_hugepages=14336 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

## General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "896"
```

```
LD_LIBRARY_PATH = "/usr/cpu2006/amd1104-rate-libs-revC/32:/usr/cpu2006/amd1104-rate-libs-revC/64"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6274 chips + 64GB Memory using RHEL 6.1

## Base Compiler Invocation

C benchmarks:

```
opencc
```

C++ benchmarks:

```
openCC
```

Fortran benchmarks:

```
openf95
```

Benchmarks using both Fortran and C:

```
opencc openf95
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6284 SE)

SPECfp\_rate2006 = 209

SPECfp\_rate\_base2006 = 191

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

## Base Portability Flags (Continued)

481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

### C benchmarks:

-march=bdver1 -Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m  
-IPA:plimit=8000 -IPA:small\_pu=100 -mso

### C++ benchmarks:

-march=bdver1 -Ofast -static -CG:load\_exe=0 -OPT:malloc\_alg=1  
-INLINE:aggressive=on -HP:bd=2m:heap=2m -D\_\_OPEN64\_FAST\_SET

### Fortran benchmarks:

-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2  
-OPT:unroll\_size=256 -HP:bd=2m:heap=2m -mso

### Benchmarks using both Fortran and C:

-march=bdver1 -Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m  
-IPA:plimit=8000 -IPA:small\_pu=100 -mso -LNO:blocking=off  
-OPT:rsqrt=2 -OPT:unroll\_size=256

## Peak Compiler Invocation

### C benchmarks:

opencc

### C++ benchmarks:

openCC

### Fortran benchmarks:

openf95

### Benchmarks using both Fortran and C:

opencc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6284 SE)

SPECfp\_rate2006 = 209

SPECfp\_rate\_base2006 = 191

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

## Peak Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
-HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

470.lbm: -march=bdver1 -Ofast -CG:cmp_peep=on
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -HP:bdt=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=1000
-OPT:malloc_alg=2 -CG:cmp_peep=on -CG:local_sched_alg=2
-CG:p2align=0 -INLINE:aggressive=on -LNO:prefetch=2
-LNO:prefetch_ahead=4 -mso

```

C++ benchmarks:

```

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=3000
-LNO:ignore_feedback=off -CG:local_sched_alg=2
-CG:load_exe=0 -OPT:unroll_size=256 -fno-exceptions
-HP:bdt=2m:heap=2m

447.dealIII: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static
-INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0
-fno-emit-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off
-TENV:frame_pointer=off

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6284 SE)

SPECfp\_rate2006 = 209

SPECfp\_rate\_base2006 = 191

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

450.soplex: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -LNO:ignore\_feedback=off  
-INLINE:aggressive=on -OPT:RO=1 -OPT:IEEE\_arith=3  
-OPT:IEEE\_NaN\_Inf=off -OPT:fold\_unsigned\_relops=on  
-fno-exceptions -CG:p2align=0 -m32 -HP:bdt=2m:heap=2m  
-WOPT:sib=on

453.povray: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -CG:pre\_local\_sched=off  
-CG:p2align=0 -CG:p2align\_split=on -CG:dsched=on  
-INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2  
-OPT:alias=disjoint -WOPT:aggcm=0

### Fortran benchmarks:

410.bwaves: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on  
-LNO:blocking=off -LNO:ignore\_feedback=off -LNO:fu=4  
-LNO:loop\_model\_simd=on -LNO:simd\_rm\_unity\_remainder=on  
-WOPT:aggstr=0 -HP:bdt=2m:heap=2m -CG:cmp\_peep=on

416.gamess: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0  
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256  
-OPT:unroll\_times\_max=2 -CG:local\_sched\_alg=1  
-HP:bdt=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off  
-IPA:plimit=1500 -HP:bdt=2m:heap=2m

437.leslie3d: -march=bdver1 -Ofast -CG:pre\_minreg\_level=2 -LNO:simd=0  
-LNO:fusion=2 -HP:bdt=2m:heap=2m -mso

459.GemsFDTD: -march=bdver1 -Ofast -IPA:plimit=1500 -OPT:unroll\_size=0  
-LNO:fission=2 -CG:load\_exe=0 -CG:local\_sched\_alg=2 -HP

465.tonto: -march=bdver1 -Ofast -OPT:alias=no\_f90\_pointer\_alias  
-LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525  
-HP:bdt=2m:heap=2m

### Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2  
-HP:bdt=2m:heap=2m -CG:local\_sched\_alg=2 -GRA:unspill=ON  
-CG:load\_exe=3 -LNO:simd=3

436.cactusADM: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:blocking=off  
-LNO:prefetch=2 -HP -CG:locs\_shallow\_depth=1 -CG:load\_exe=0  
-CG:dsched=on -WOPT:sib=on

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6284 SE)

SPECfp\_rate2006 = 209

SPECfp\_rate\_base2006 = 191

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

454.calculix: -march=bdver1 -Ofast -OPT:unroll\_size=256  
-GRA:optimize\_boundary=on -CG:dsched=on -HP:bdt=2m:heap=2m

481.wrf: -march=bdver1 -Ofast -LNO:blocking=off -LANG:copyinout=off  
-IPA:callee\_limit=5000 -GRA:prioritize\_by\_density=on  
-CG:load\_exe=1 -HP -WOPT:sib=on

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC-I.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC-I.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 12:23:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 17 July 2012.