



SPEC® CINT2006 Result


Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated
Acer AT350 F2 (Xeon E5-2603)

SPECint®_rate2006 = 174
SPECint_rate_base2006 = 167

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Jun-2012
Hardware Availability: May-2012
Software Availability: Dec-2011

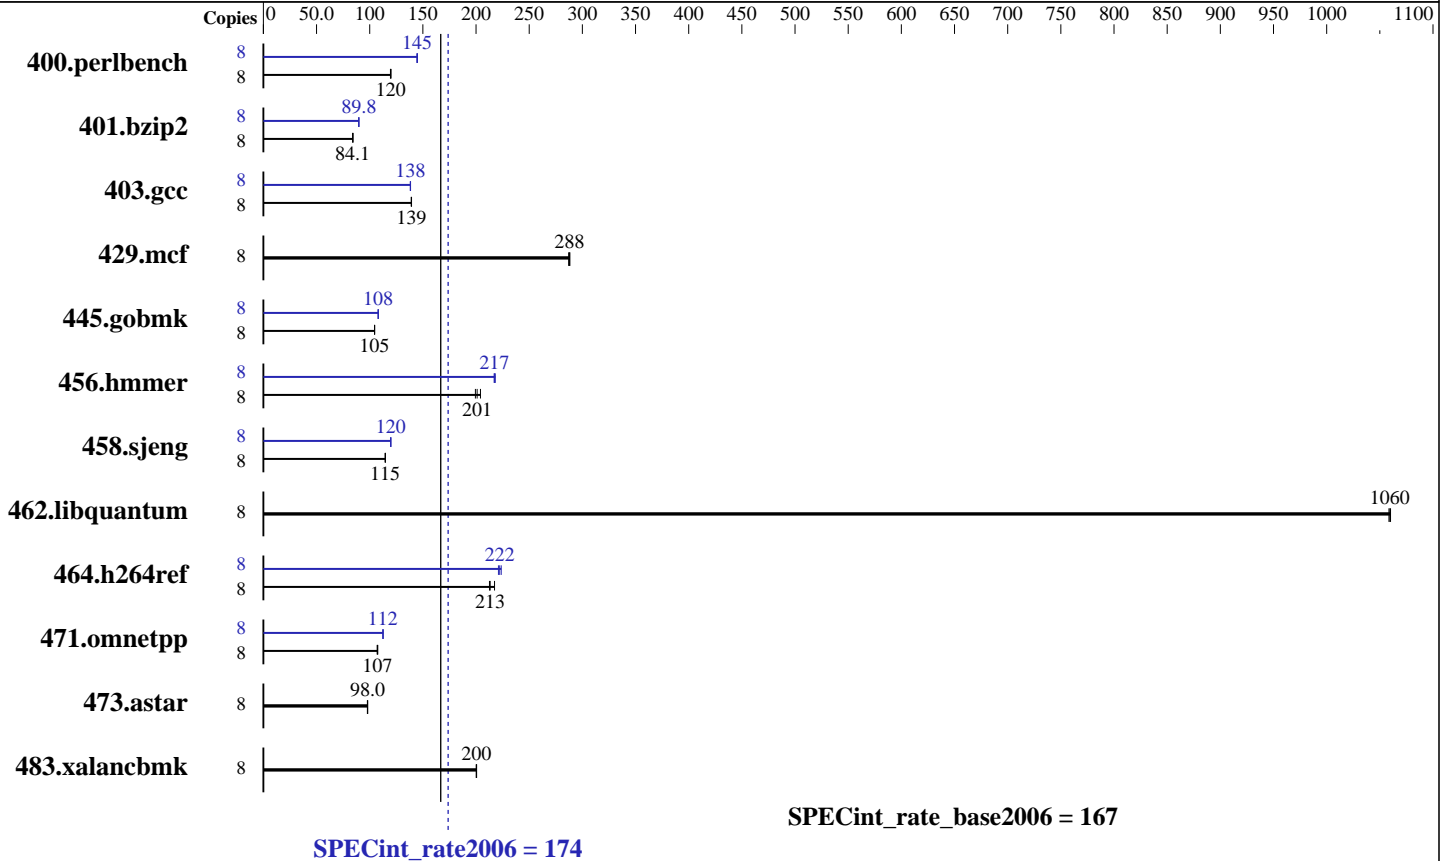

Hardware

CPU Name: Intel Xeon E5-2603
CPU Characteristics:
CPU MHz: 1800
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 10 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3L-10600R-9, ECC, running at 1067 MHz)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
Auto Parallel: No
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 174

Acer AT350 F2 (Xeon E5-2603)

SPECint_rate_base2006 = 167

CPU2006 license: 97

Test date: Jun-2012

Test sponsor: Acer Incorporated

Hardware Availability: May-2012

Tested by: Acer Incorporated

Software Availability: Dec-2011

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	653	120	654	120	651	120	8	539	145	540	145	542	144
401.bzip2	8	916	84.3	919	84.0	918	84.1	8	860	89.7	860	89.8	860	89.8
403.gcc	8	462	139	463	139	463	139	8	466	138	466	138	465	138
429.mcf	8	253	288	253	288	254	287	8	253	288	253	288	254	287
445.gobmk	8	802	105	802	105	802	105	8	777	108	777	108	777	108
456.hammer	8	371	201	374	199	366	204	8	344	217	342	218	343	217
458.sjeng	8	844	115	844	115	844	115	8	809	120	807	120	808	120
462.libquantum	8	156	1060	156	1060	157	1060	8	156	1060	156	1060	157	1060
464.h264ref	8	830	213	833	213	814	217	8	791	224	801	221	797	222
471.omnetpp	8	465	108	465	107	467	107	8	445	112	444	113	445	112
473.astar	8	573	98.0	573	98.0	574	97.8	8	573	98.0	573	98.0	574	97.8
483.xalancbmk	8	275	201	275	200	276	200	8	275	201	275	200	276	200

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /usr/cpu2006/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on localhost.localdomain Wed Jun 20 14:34:31 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2603 0 @ 1.80GHz
2 "physical id"s (chips)
8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 4
siblings : 4

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 174

Acer AT350 F2 (Xeon E5-2603)

SPECint_rate_base2006 = 167

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jun-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

Platform Notes (Continued)

```
physical 0: cores 0 1 2 3
physical 1: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:      132132764 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 19 23:43
```

```
SPEC is set to: /usr/cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_root
                ext4      328G  15G  297G   5% /
```

Additional information from dmidecode:

```
Memory:
16x Samsung M393B1K70BH1-CH9 8 GB 1066 MHz 1 rank
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64"

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 174

Acer AT350 F2 (Xeon E5-2603)

SPECint_rate_base2006 = 167

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jun-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

-Wl,-z,muldefs -L/smartheap -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 174

Acer AT350 F2 (Xeon E5-2603)

SPECint_rate_base2006 = 167

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jun-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
 -auto-ilp32 -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
 -ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias
 -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalanbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 174

Acer AT350 F2 (Xeon E5-2603)

SPECint_rate_base2006 = 167

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jun-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 12:47:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 October 2012.