



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp®_rate2006 = 385

Express5800/R120e-1M (Intel Xeon E5-2620 v2)

SPECfp_rate_base2006 = 377

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Nov-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

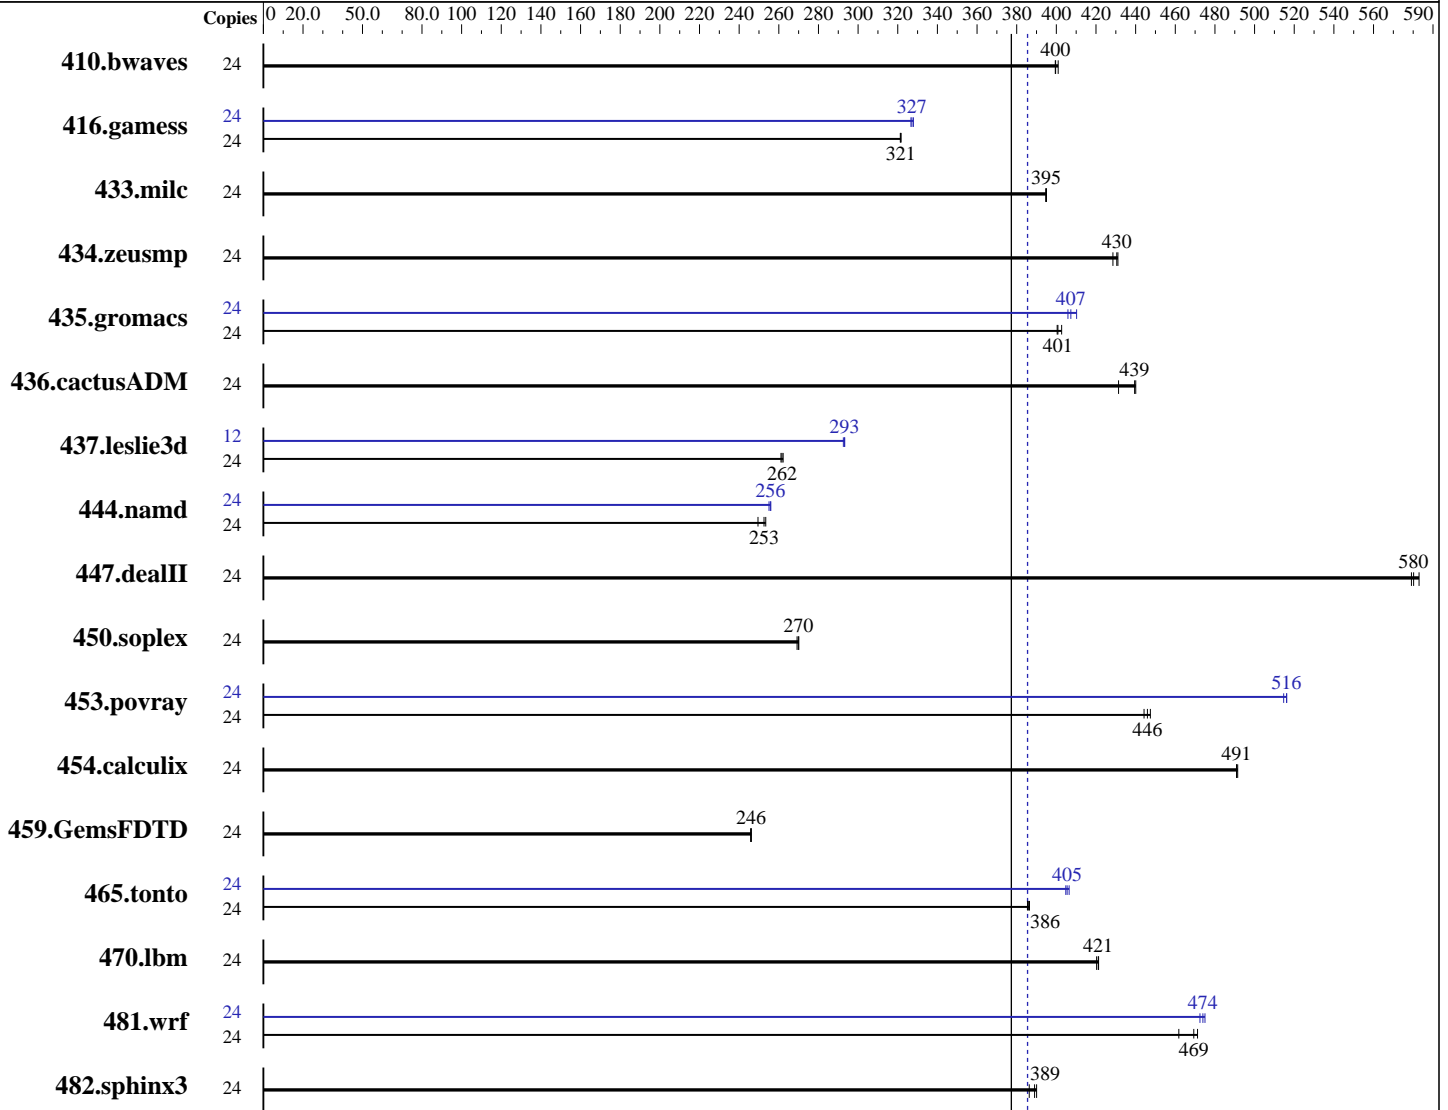

SPECfp_rate_base2006 = 377

SPECfp_rate2006 = 385

Hardware

CPU Name: Intel Xeon E5-2620 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.60 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 Kernel 2.6.32-358.18.1.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = **385**

Express5800/R120e-1M (Intel Xeon E5-2620 v2)

SPECfp_rate_base2006 = **377**

CPU2006 license: 9006

Test date: Nov-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3L-12800R-11, ECC)
 Disk Subsystem: 1 x 300 GB SAS, 10000 RPM, RAID 0
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	814	401	816	399	816	400	24	814	401	816	399	816	400
416.gamess	24	1461	322	1462	321	1463	321	24	1433	328	1439	327	1436	327
433.milc	24	558	395	558	395	558	395	24	558	395	558	395	558	395
434.zeusmp	24	507	430	507	431	510	429	24	507	430	507	431	510	429
435.gromacs	24	426	403	428	401	428	400	24	418	410	422	406	421	407
436.cactusADM	24	653	439	665	431	652	440	24	653	439	665	431	652	440
437.leslie3d	24	864	261	862	262	860	262	12	385	293	386	293	385	293
444.namd	24	771	250	762	253	760	253	24	755	255	752	256	753	256
447.dealII	24	474	579	473	580	471	583	24	474	579	473	580	471	583
450.soplex	24	743	269	742	270	741	270	24	743	269	742	270	741	270
453.povray	24	286	446	287	444	285	447	24	248	515	247	516	247	516
454.calculix	24	403	491	403	491	403	491	24	403	491	403	491	403	491
459.GemsFDTD	24	1036	246	1035	246	1035	246	24	1036	246	1035	246	1035	246
465.tonto	24	612	386	613	385	611	386	24	583	405	582	405	581	406
470.lbm	24	783	421	783	421	785	420	24	783	421	783	421	785	420
481.wrf	24	571	469	569	471	581	462	24	567	472	564	475	566	474
482.sphinx3	24	1202	389	1211	386	1199	390	24	1202	389	1211	386	1199	390

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
 Energy Performance: Performance
 Memory Voltage: 1.5 V



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 385

Express5800/R120e-1M (Intel Xeon E5-2620 v2)

SPECfp_rate_base2006 = 377

CPU2006 license: 9006

Test date: Nov-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1 > /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

The Express5800/R120e-1M and

the Express5800/R120e-2M models are electronically equivalent.

The results have been measured on the Express5800/R120e-2M model.

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 385

Express5800/R120e-1M (Intel Xeon E5-2620 v2)

SPECfp_rate_base2006 = 377

CPU2006 license: 9006

Test date: Nov-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 385

Express5800/R120e-1M (Intel Xeon E5-2620 v2)

SPECfp_rate_base2006 = 377

CPU2006 license: 9006

Test date: Nov-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 385

Express5800/R120e-1M (Intel Xeon E5-2620 v2)

SPECfp_rate_base2006 = 377

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Nov-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 19:40:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 December 2013.