



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECfp<sup>®</sup>\_rate2006 = 621

Huawei BH622 V2 (Intel Xeon E5-2670 v2)

SPECfp\_rate\_base2006 = 605

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

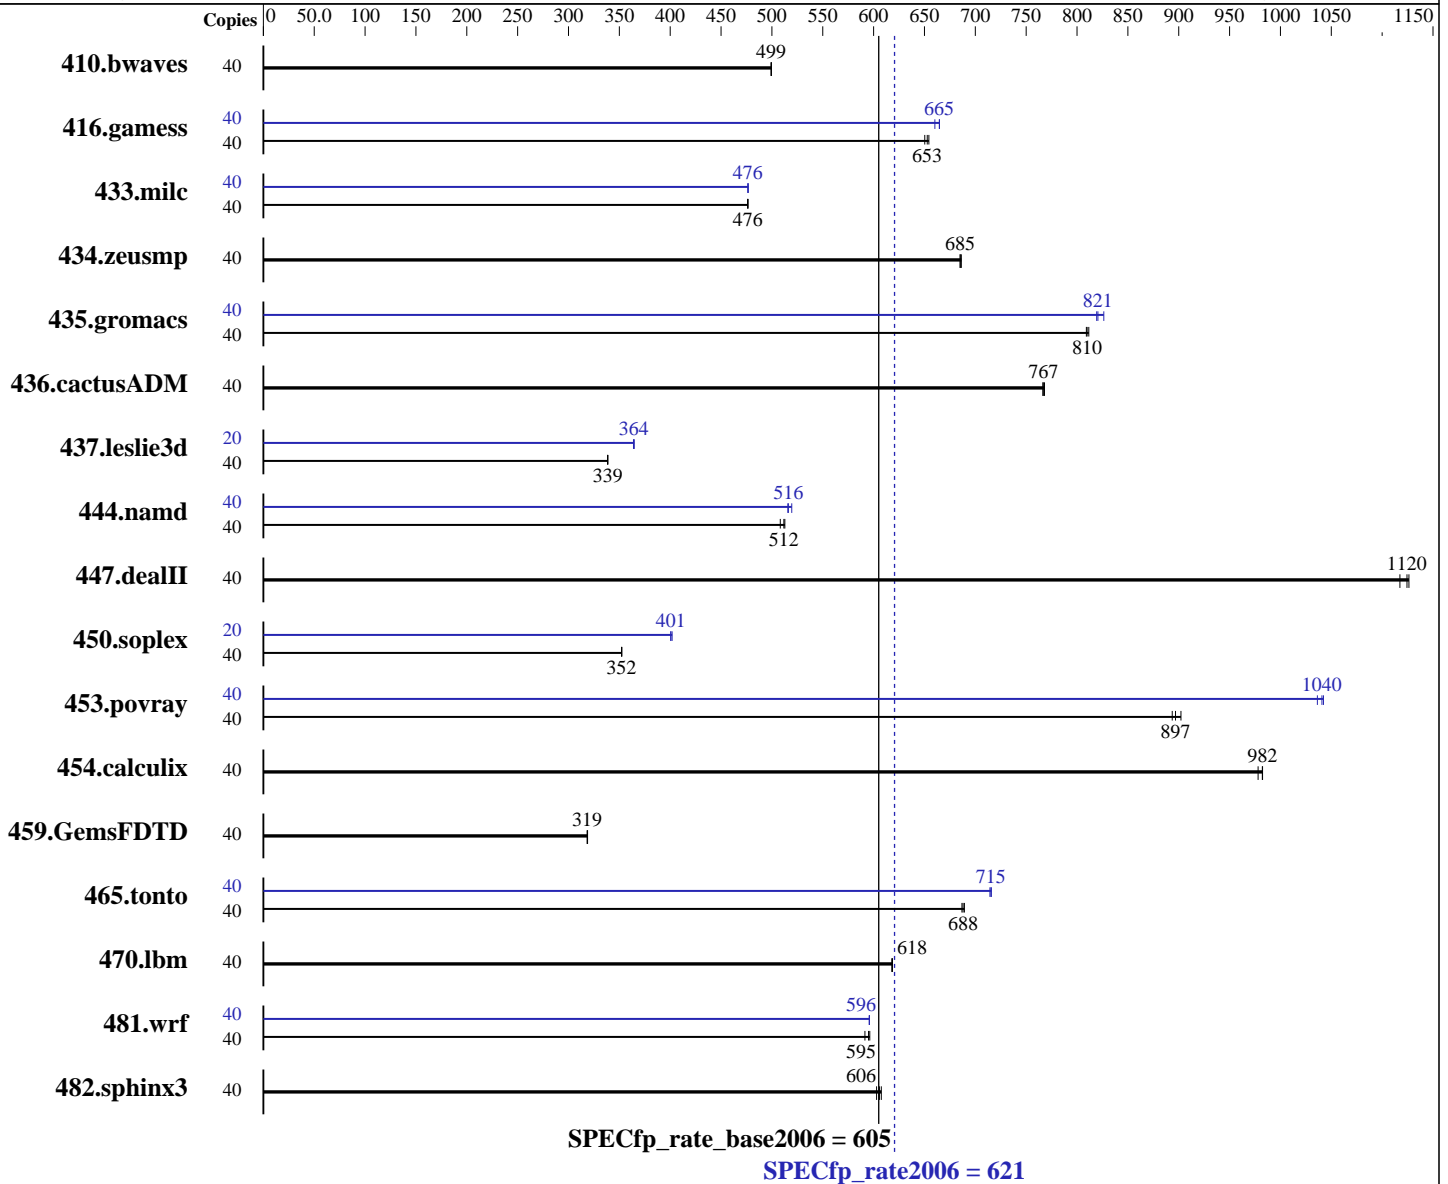

### Hardware

CPU Name: Intel Xeon E5-2670 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECfp\_rate2006 = **621**

Huawei BH622 V2 (Intel Xeon E5-2670 v2)

SPECfp\_rate\_base2006 = **605**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
 Disk Subsystem: 1 x 300 GB SAS, 10000 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	1088	499	<b>1088</b>	<b>499</b>	1089	499	40	1088	499	<b>1088</b>	<b>499</b>	1089	499
416.gamess	40	1197	654	<b>1200</b>	<b>653</b>	1204	650	40	1178	665	1186	660	<b>1178</b>	<b>665</b>
433.milc	40	771	476	<b>771</b>	<b>476</b>	771	476	40	770	477	<b>771</b>	<b>476</b>	771	476
434.zeusmp	40	531	685	530	686	<b>531</b>	<b>685</b>	40	531	685	530	686	<b>531</b>	<b>685</b>
435.gromacs	40	353	809	<b>353</b>	<b>810</b>	352	812	40	346	826	349	819	<b>348</b>	<b>821</b>
436.cactusADM	40	622	768	<b>623</b>	<b>767</b>	624	766	40	622	768	<b>623</b>	<b>767</b>	624	766
437.leslie3d	40	1111	338	<b>1110</b>	<b>339</b>	1110	339	20	517	364	<b>516</b>	<b>364</b>	516	365
444.namd	40	631	508	<b>627</b>	<b>512</b>	626	513	40	618	519	<b>621</b>	<b>516</b>	622	516
447.dealII	40	<b>407</b>	<b>1120</b>	409	1120	406	1130	40	<b>407</b>	<b>1120</b>	409	1120	406	1130
450.soplex	40	947	352	<b>947</b>	<b>352</b>	947	352	20	415	402	<b>416</b>	<b>401</b>	416	401
453.povray	40	238	894	236	902	<b>237</b>	<b>897</b>	40	204	1040	<b>204</b>	<b>1040</b>	205	1040
454.calculix	40	337	978	<b>336</b>	<b>982</b>	336	982	40	337	978	<b>336</b>	<b>982</b>	336	982
459.GemsFDTD	40	<b>1332</b>	<b>319</b>	1331	319	1333	318	40	<b>1332</b>	<b>319</b>	1331	319	1333	318
465.tonto	40	573	687	571	689	<b>572</b>	<b>688</b>	40	551	714	550	716	<b>550</b>	<b>715</b>
470.lbm	40	<b>889</b>	<b>618</b>	889	618	889	619	40	<b>889</b>	<b>618</b>	889	618	889	619
481.wrf	40	749	596	<b>751</b>	<b>595</b>	755	591	40	<b>750</b>	<b>596</b>	750	596	750	596
482.sphinx3	40	<b>1287</b>	<b>606</b>	1283	608	1293	603	40	<b>1287</b>	<b>606</b>	1283	608	1293	603

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Custom  
Baseboard Management Controller used to adjust the fan speed to 100%

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 621

Huawei BH622 V2 (Intel Xeon E5-2670 v2)

SPECfp\_rate\_base2006 = 605

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

## Platform Notes (Continued)

Sysinfo program /spec14/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on localhost Sun Jul 27 06:42:25 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2670 v2 @ 2.50GHz
 2 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 10
  siblings  : 20
  physical 0: cores 0 1 2 3 4 8 9 10 11 12
  physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      264478184 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 26 19:00
```

```
SPEC is set to: /spec14
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  272G   63G  196G  25% /
```

```
Additional information from dmidecode:
BIOS Insyde Corp. RMIBV629 05/12/2014
Memory:
 4x Hynix HMT42GR7AFR4C-RD 16 GB 1866 MHz 2 rank
 8x NO DIMM NO DIMM
12x Samsung M393B2G70DB0-CMA 16 GB 1866 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 621

Huawei BH622 V2 (Intel Xeon E5-2670 v2)

SPECfp\_rate\_base2006 = 605

CPU2006 license: 3175

Test date: Jul-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec14/libs/32:/spec14/libs/64:/spec14/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Huawei**

**SPECfp\_rate2006 = 621**

**Huawei BH622 V2 (Intel Xeon E5-2670 v2)**

**SPECfp\_rate\_base2006 = 605**

**CPU2006 license:** 3175

**Test sponsor:** Huawei

**Tested by:** Huawei

**Test date:** Jul-2014

**Hardware Availability:** Sep-2013

**Software Availability:** Nov-2013

## Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks (except as noted below):

`icpc -m64`

`450.soplex: icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`  
416.gamess: `-DSPEC_CPU_LP64`  
433.milc: `-DSPEC_CPU_LP64`  
434.zeusmp: `-DSPEC_CPU_LP64`  
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`  
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`  
437.leslie3d: `-DSPEC_CPU_LP64`  
444.namd: `-DSPEC_CPU_LP64`  
447.dealII: `-DSPEC_CPU_LP64`  
453.povray: `-DSPEC_CPU_LP64`  
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`  
459.GemsFDTD: `-DSPEC_CPU_LP64`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 621

Huawei BH622 V2 (Intel Xeon E5-2670 v2)

SPECfp\_rate\_base2006 = 605

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

## Peak Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

### C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 621

Huawei BH622 V2 (Intel Xeon E5-2670 v2)

SPECfp\_rate\_base2006 = 605

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Sep 2 13:39:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 September 2014.