



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2680 v3 @ 2.50GHz)

SPECfp<sup>®</sup>\_rate2006 = 784

SPECfp\_rate\_base2006 = 766

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

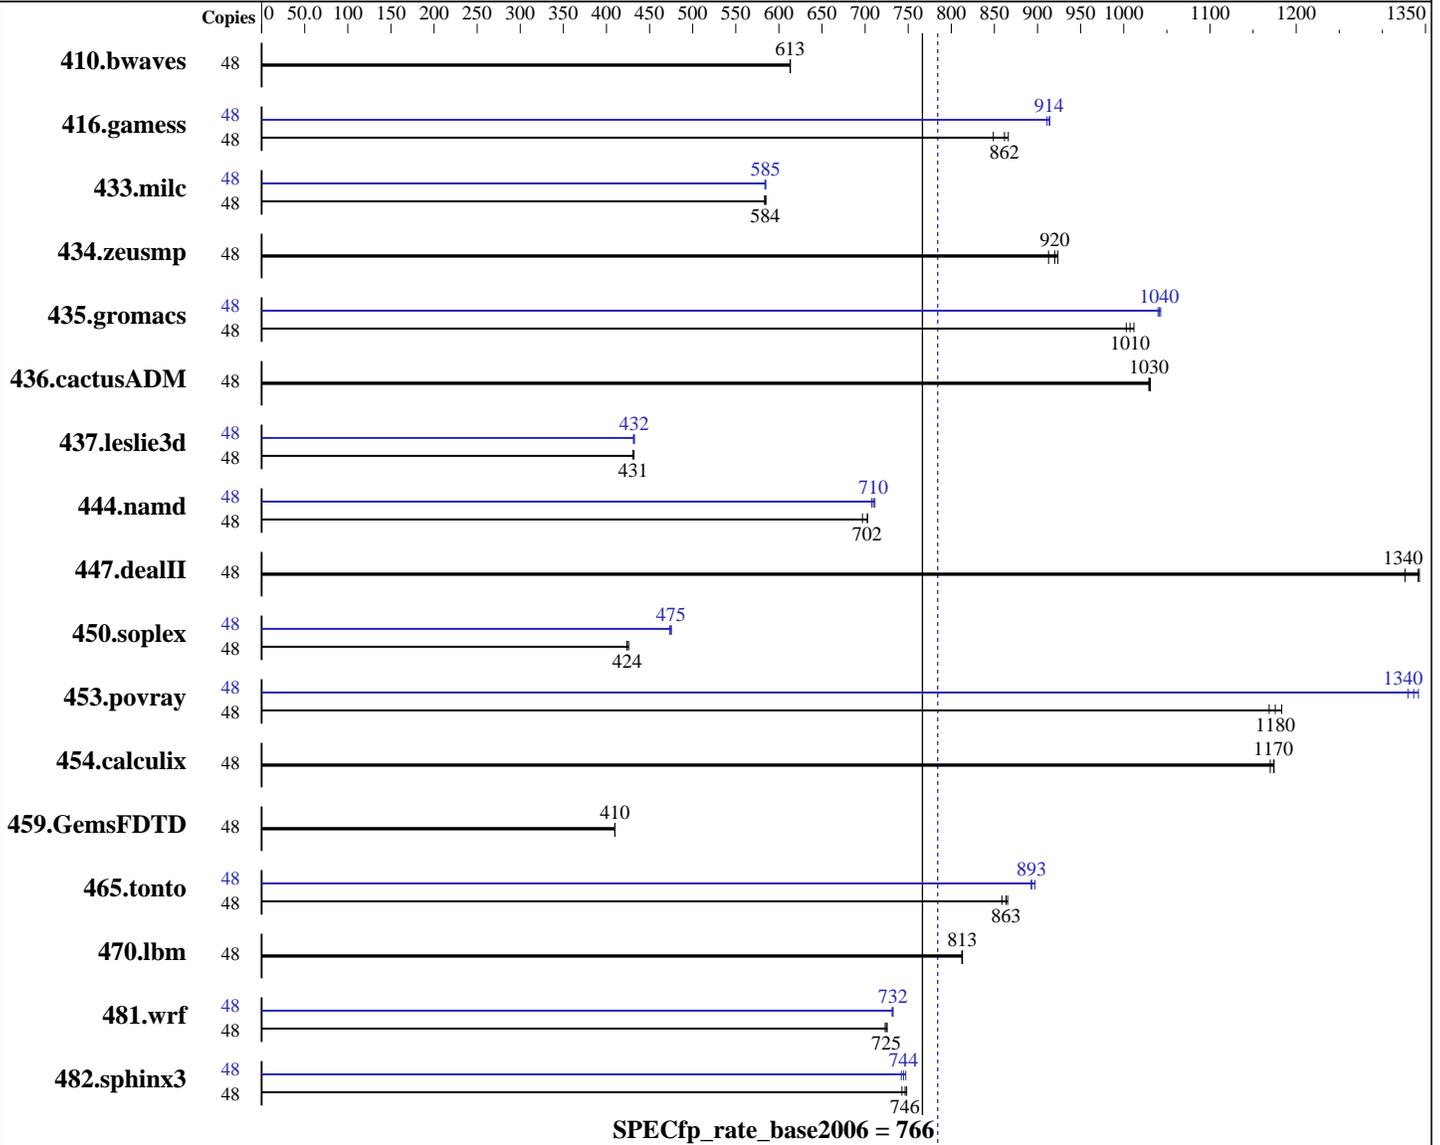

### Hardware

CPU Name: Intel Xeon E5-2680 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2680 v3 @ 2.50GHz)

SPECfp\_rate2006 = 784

SPECfp\_rate\_base2006 = 766

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

L3 Cache: 30 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 300GB SAS, 15K RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1063	613	<b>1064</b>	<b>613</b>	1064	613	48	1063	613	<b>1064</b>	<b>613</b>	1064	613
416.gamess	48	1085	866	<b>1091</b>	<b>862</b>	1107	849	48	1032	911	1028	914	<b>1029</b>	<b>914</b>
433.milc	48	755	583	<b>755</b>	<b>584</b>	753	585	48	754	585	755	584	<b>754</b>	<b>585</b>
434.zeusmp	48	473	924	<b>475</b>	<b>920</b>	479	913	48	473	924	<b>475</b>	<b>920</b>	479	913
435.gromacs	48	<b>340</b>	<b>1010</b>	339	1010	342	1000	48	329	1040	<b>329</b>	<b>1040</b>	330	1040
436.cactusADM	48	<b>557</b>	<b>1030</b>	556	1030	557	1030	48	<b>557</b>	<b>1030</b>	556	1030	557	1030
437.leslie3d	48	<b>1047</b>	<b>431</b>	1047	431	1044	432	48	1044	432	<b>1044</b>	<b>432</b>	1046	431
444.namd	48	<b>548</b>	<b>702</b>	552	697	548	703	48	541	711	544	708	<b>542</b>	<b>710</b>
447.dealII	48	<b>409</b>	<b>1340</b>	409	1340	414	1330	48	<b>409</b>	<b>1340</b>	409	1340	414	1330
450.soplex	48	940	426	<b>944</b>	<b>424</b>	945	424	48	842	475	<b>843</b>	<b>475</b>	846	473
453.povray	48	216	1180	219	1170	<b>217</b>	<b>1180</b>	48	<b>191</b>	<b>1340</b>	192	1330	190	1340
454.calculix	48	338	1170	337	1170	<b>337</b>	<b>1170</b>	48	338	1170	337	1170	<b>337</b>	<b>1170</b>
459.GemsFDTD	48	<b>1243</b>	<b>410</b>	1243	410	1243	410	48	<b>1243</b>	<b>410</b>	1243	410	1243	410
465.tonto	48	546	865	<b>547</b>	<b>863</b>	550	859	48	529	893	<b>529</b>	<b>893</b>	527	897
470.lbm	48	812	812	811	813	<b>812</b>	<b>813</b>	48	812	812	811	813	<b>812</b>	<b>813</b>
481.wrf	48	741	723	739	726	<b>740</b>	<b>725</b>	48	733	731	732	732	<b>732</b>	<b>732</b>
482.sphinx3	48	1250	748	1260	743	<b>1253</b>	<b>746</b>	48	<b>1257</b>	<b>744</b>	1252	747	1261	742

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

CPU Performance set to HPC  
Power Technology set to Custom  
Processor Power State C6 set to Disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2680 v3 @ 2.50GHz)

SPECfp\_rate2006 = 784

SPECfp\_rate\_base2006 = 766

**CPU2006 license:** 9019  
**Test sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test date:** Dec-2014  
**Hardware Availability:** Sep-2014  
**Software Availability:** Nov-2013

### Platform Notes (Continued)

Energy Performance BIAS setting set to Performance  
Memory RAS configuration set to Maximum Performance  
QPI Snoop Mode set to Cluster-on-Die  
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on rhel65 Tue Dec 16 04:54:06 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2680 v3 @ 2.50GHz
 2 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores     : 12
  siblings      : 24
  physical 0:   cores 0 1 2 3 4 5 8 9 10 11 12 13
  physical 1:   cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size     : 15360 KB
```

```
From /proc/meminfo
MemTotal:      264256812 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux rhel65 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 15 17:51
```

```
SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb2       ext4  245G  52G  181G  23% /
```

Additional information from dmidecode:  
BIOS Cisco Systems, Inc. B200M4.2.2.3c.0.101420141352 10/14/2014  
Memory:  
16x 0xCE00 M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank  
8x NO DIMM NO DIMM

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2680 v3 @ 2.50GHz)

SPECfp\_rate2006 = 784

SPECfp\_rate\_base2006 = 766

**CPU2006 license:** 9019  
**Test sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test date:** Dec-2014  
**Hardware Availability:** Sep-2014  
**Software Availability:** Nov-2013

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2680 v3 @ 2.50GHz)

SPECfp\_rate2006 = 784

SPECfp\_rate\_base2006 = 766

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

## Base Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2680 v3 @ 2.50GHz)

SPECfp\_rate2006 = 784

SPECfp\_rate\_base2006 = 766

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

## Peak Portability Flags (Continued)

```

416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
         -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
            -unroll2

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
         -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
         -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
         -ansi-alias

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2680 v3 @ 2.50GHz)

SPECfp\_rate2006 = 784

SPECfp\_rate\_base2006 = 766

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.xml>



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2680 v3 @ 2.50GHz)

SPECfp\_rate2006 = 784

SPECfp\_rate\_base2006 = 766

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Dec-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Nov-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Jan 14 10:28:54 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 January 2015.