



SPEC[®] CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp[®]2006 = **77.0**

Lenovo System x3250 M5
(Intel Xeon E3-1271 v3, 3.60 GHz)

SPECfp_base2006 = **75.8**

CPU2006 license: 9017


Test date: Dec-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

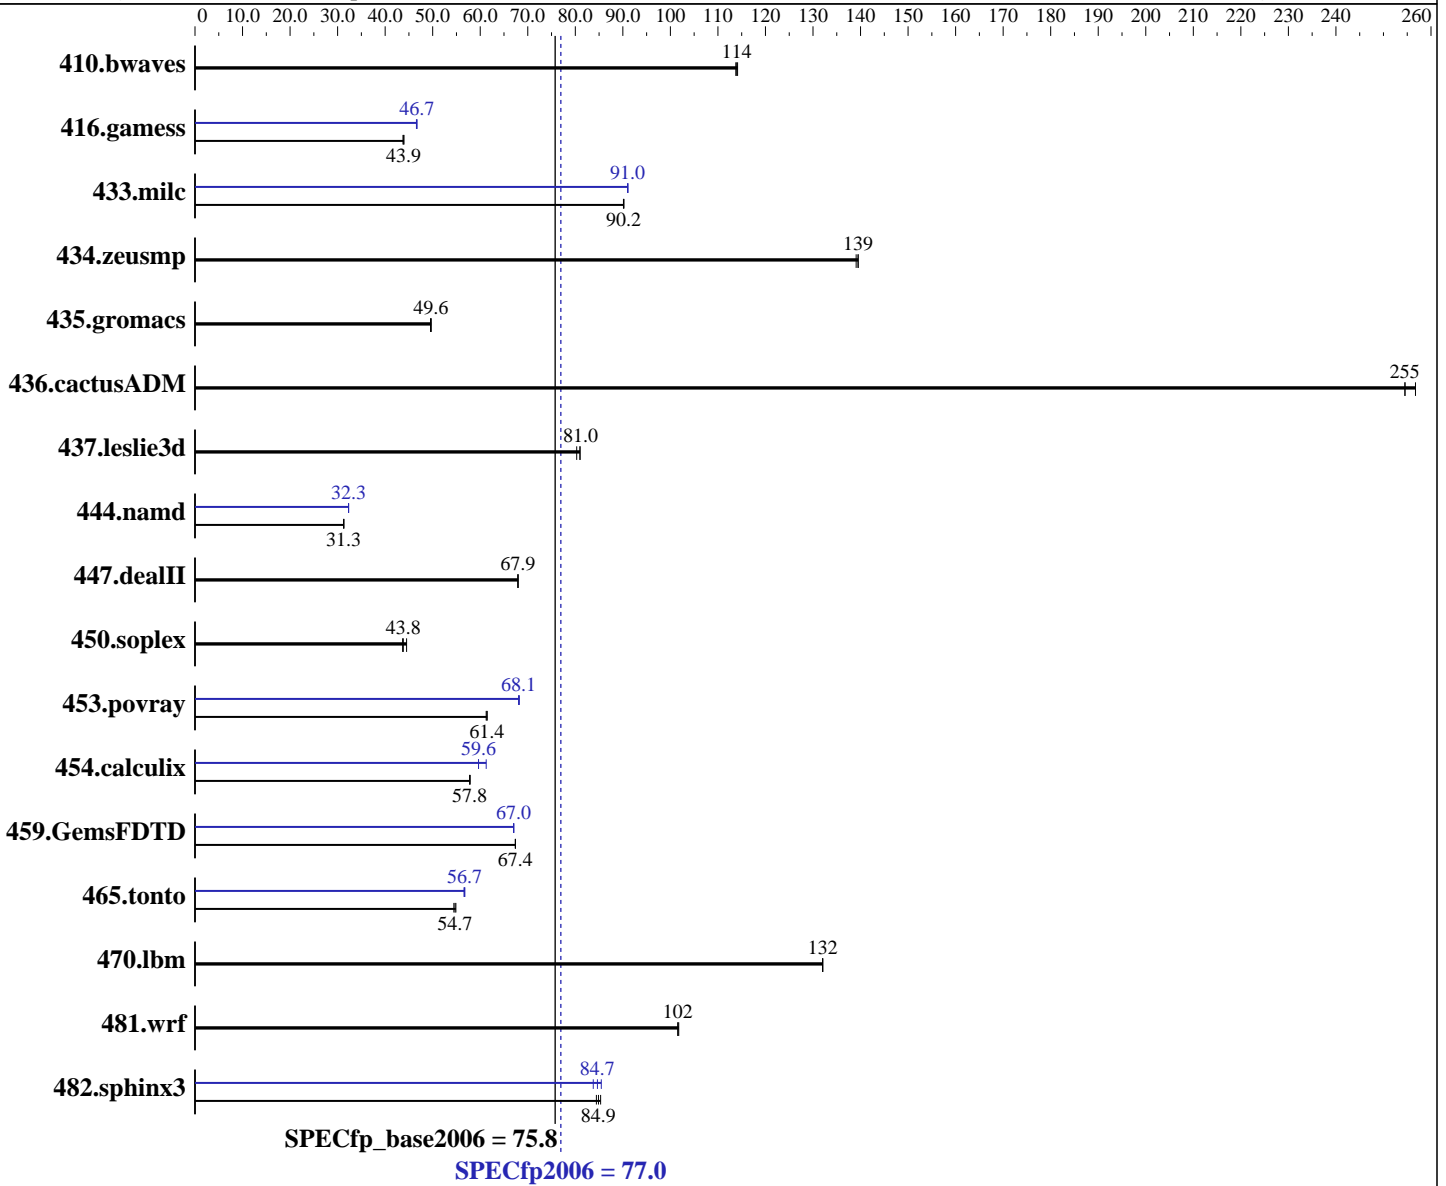

Hardware

CPU Name: Intel Xeon E3-1271 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 4.00 GHz
 CPU MHz: 3600
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = **77.0**

Lenovo System x3250 M5
(Intel Xeon E3-1271 v3, 3.60 GHz)

SPECfp_base2006 = **75.8**

CPU2006 license: 9017

Test date: Dec-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (4 x 4 GB 2Rx8 PC3-12800U-13)
Disk Subsystem: 1 x 1000 GB SATA, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	119	114	119	114	<u>119</u>	<u>114</u>	119	114	119	114	<u>119</u>	<u>114</u>
416.gamess	446	43.9	<u>446</u>	<u>43.9</u>	448	43.7	<u>420</u>	<u>46.7</u>	420	46.6	419	46.7
433.milc	102	90.2	<u>102</u>	<u>90.2</u>	102	90.1	<u>101</u>	<u>91.0</u>	101	91.0	101	91.1
434.zeusmp	65.2	139	<u>65.2</u>	<u>139</u>	65.4	139	65.2	139	<u>65.2</u>	<u>139</u>	65.4	139
435.gromacs	144	49.7	144	49.5	<u>144</u>	<u>49.6</u>	144	49.7	144	49.5	<u>144</u>	<u>49.6</u>
436.cactusADM	47.0	255	<u>47.0</u>	<u>255</u>	46.5	257	47.0	255	<u>47.0</u>	<u>255</u>	46.5	257
437.leslie3d	<u>116</u>	<u>81.0</u>	117	80.3	116	81.0	<u>116</u>	<u>81.0</u>	117	80.3	116	81.0
444.namd	<u>256</u>	<u>31.3</u>	256	31.3	256	31.3	<u>248</u>	<u>32.3</u>	248	32.3	248	32.3
447.dealII	168	67.9	<u>168</u>	<u>67.9</u>	168	68.0	168	67.9	<u>168</u>	<u>67.9</u>	168	68.0
450.soplex	191	43.7	187	44.5	<u>190</u>	<u>43.8</u>	191	43.7	187	44.5	<u>190</u>	<u>43.8</u>
453.povray	86.6	61.4	86.9	61.3	<u>86.6</u>	<u>61.4</u>	78.1	68.1	78.0	68.2	<u>78.1</u>	<u>68.1</u>
454.calculix	<u>143</u>	<u>57.8</u>	143	57.9	143	57.8	<u>138</u>	<u>59.6</u>	138	59.6	135	61.3
459.GemsFDTD	157	67.4	157	67.4	<u>157</u>	<u>67.4</u>	<u>158</u>	<u>67.0</u>	158	67.0	158	67.1
465.tonto	<u>180</u>	<u>54.7</u>	181	54.5	179	54.9	<u>174</u>	<u>56.7</u>	174	56.6	173	56.8
470.lbm	<u>104</u>	<u>132</u>	104	132	104	132	<u>104</u>	<u>132</u>	104	132	104	132
481.wrf	110	102	<u>110</u>	<u>102</u>	110	102	110	102	<u>110</u>	<u>102</u>	110	102
482.sphinx3	231	84.4	228	85.3	<u>230</u>	<u>84.9</u>	228	85.5	<u>230</u>	<u>84.7</u>	233	83.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS setting:
Operating Mode set to Maximum Performance
Sysinfo program /home/SPEC_ic14/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Sun Dec 28 02:00:42 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 77.0

Lenovo System x3250 M5
(Intel Xeon E3-1271 v3, 3.60 GHz)

SPECfp_base2006 = 75.8

CPU2006 license: 9017

Test date: Dec-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

Platform Notes (Continued)

```

From /proc/cpuinfo
  model name : Intel(R) Xeon(R) CPU E3-1271 v3 @ 3.60GHz
    1 "physical id"s (chips)
    8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 8
  physical 0: cores 0 1 2 3
  cache size : 8192 KB

From /proc/meminfo
MemTotal:      16165980 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
EST 2013 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Dec 26 18:56

SPEC is set to: /home/SPEC_ic14
Filesystem                Type      Size   Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_home ext4      860G   23G  793G   3% /home

Additional information from dmidecode:
  BIOS IBM -[JUE115CUS-1.06]- 11/11/2014
  Memory:
    4x Hynix/Hyundai HMT351U7EFR8A-PB 4 GB 1600 MHz 2 rank

(End of data from sysinfo program)

```

General Notes

Environment variables set by runspec before the start of the run:

```

KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/SPEC_ic14/libs/32:/home/SPEC_ic14/libs/64:/home/SPEC_ic14/sh"
OMP_NUM_THREADS = "4"

```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 77.0

Lenovo System x3250 M5
(Intel Xeon E3-1271 v3, 3.60 GHz)

SPECfp_base2006 = 75.8

CPU2006 license: 9017

Test date: Dec-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

General Notes (Continued)

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 77.0

Lenovo System x3250 M5
(Intel Xeon E3-1271 v3, 3.60 GHz)

SPECfp_base2006 = 75.8

CPU2006 license: 9017

Test date: Dec-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

Base Optimization Flags (Continued)

C++ benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias`

Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel`

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 77.0

Lenovo System x3250 M5
(Intel Xeon E3-1271 v3, 3.60 GHz)

SPECfp_base2006 = 75.8

CPU2006 license: 9017

Test date: Dec-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-A.xml>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3250 M5
(Intel Xeon E3-1271 v3, 3.60 GHz)

SPECfp2006 = 77.0

SPECfp_base2006 = 75.8

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Dec-2014

Hardware Availability: Jul-2014

Software Availability: Nov-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jan 27 13:27:51 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 January 2015.