



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

SPECfp<sup>®</sup>\_rate2006 = 527

Huawei CH121 V3 (Intel Xeon E5-2630L v3)

SPECfp\_rate\_base2006 = 514

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Nov-2013

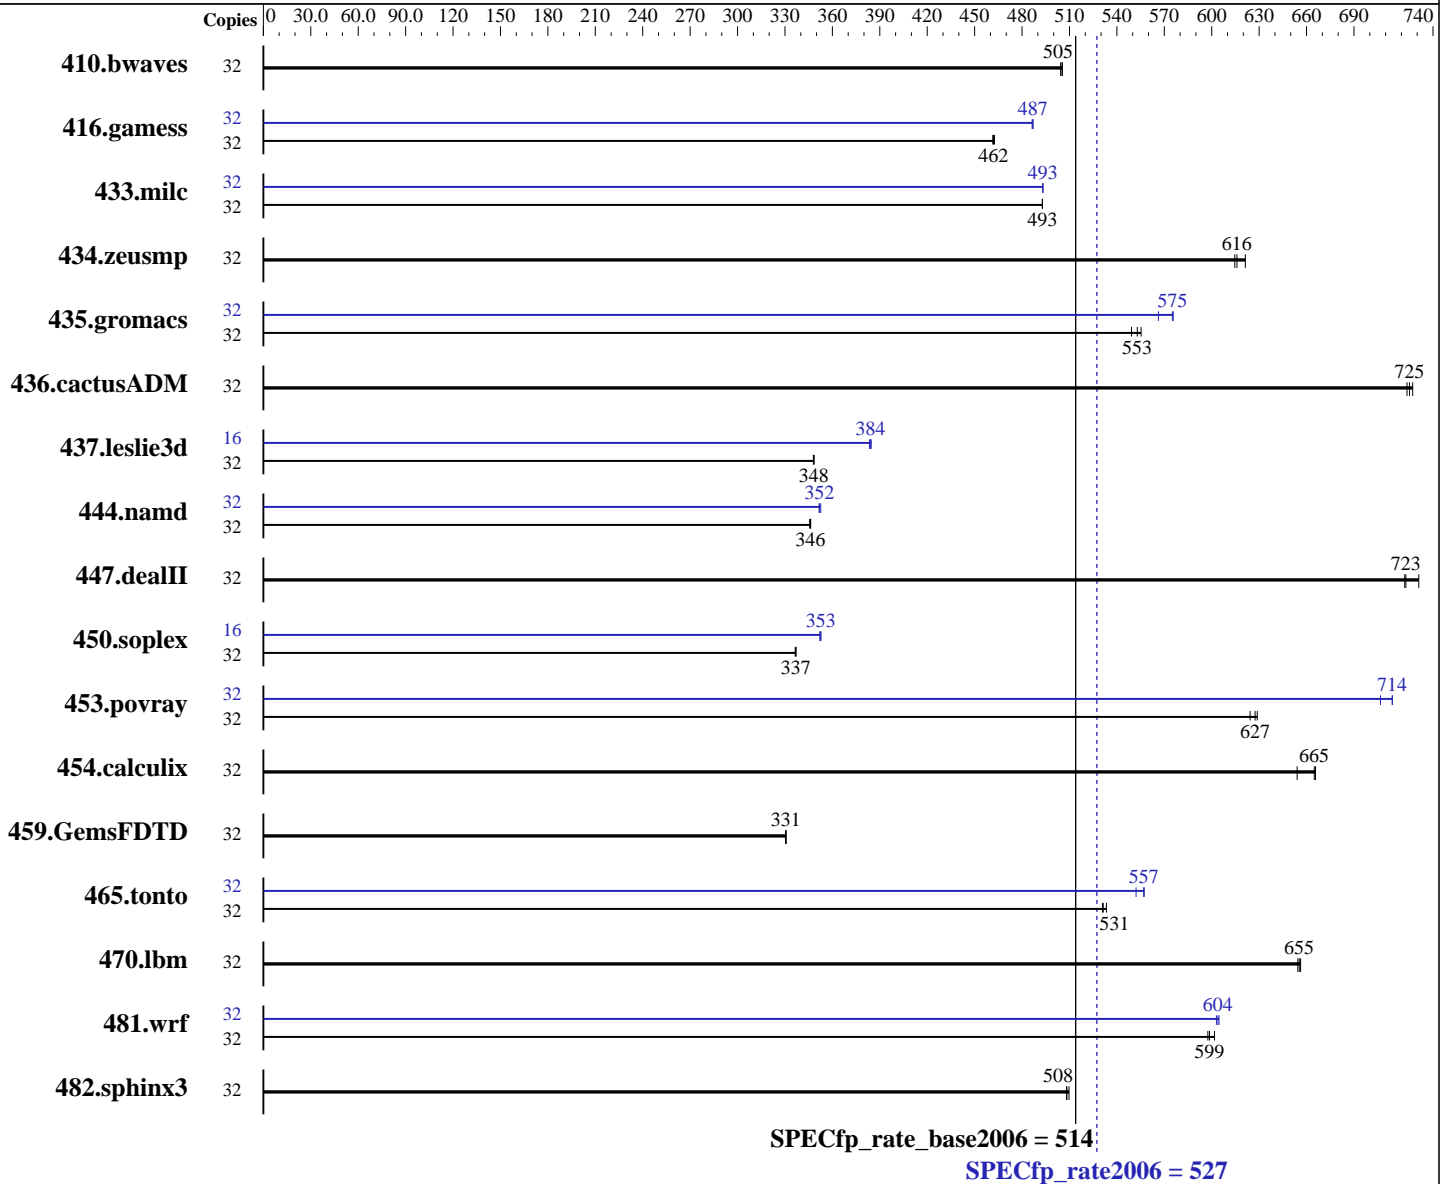

### Hardware

CPU Name: Intel Xeon E5-2630L v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

SPECfp\_rate2006 = **527**

Huawei CH121 V3 (Intel Xeon E5-2630L v3)

SPECfp\_rate\_base2006 = **514**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Nov-2013

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	32	862	505	<b>862</b>	<b>505</b>	860	506	32	862	505	<b>862</b>	<b>505</b>	860	506		
416.gamess	32	1358	462	1355	463	<b>1356</b>	<b>462</b>	32	1287	487	<b>1287</b>	<b>487</b>	1288	486		
433.milc	32	596	493	<b>596</b>	<b>493</b>	596	493	32	<b>596</b>	<b>493</b>	596	493	596	493		
434.zeusmp	32	<b>473</b>	<b>616</b>	469	621	474	615	32	<b>473</b>	<b>616</b>	469	621	474	615		
435.gromacs	32	411	555	416	549	<b>413</b>	<b>553</b>	32	<b>397</b>	<b>575</b>	403	566	397	576		
436.cactusADM	32	<b>527</b>	<b>725</b>	528	724	526	727	32	<b>527</b>	<b>725</b>	528	724	526	727		
437.leslie3d	32	863	348	864	348	<b>864</b>	<b>348</b>	16	392	383	<b>391</b>	<b>384</b>	391	385		
444.namd	32	743	346	<b>741</b>	<b>346</b>	741	346	32	<b>729</b>	<b>352</b>	728	353	730	352		
447.dealII	32	507	722	<b>506</b>	<b>723</b>	501	731	32	507	722	<b>506</b>	<b>723</b>	501	731		
450.soplex	32	792	337	<b>792</b>	<b>337</b>	793	336	16	<b>378</b>	<b>353</b>	378	353	379	352		
453.povray	32	273	624	<b>271</b>	<b>627</b>	271	629	32	241	707	<b>238</b>	<b>714</b>	238	714		
454.calculix	32	<b>397</b>	<b>665</b>	397	666	404	654	32	<b>397</b>	<b>665</b>	397	666	404	654		
459.GemsFDTD	32	1028	330	1027	331	<b>1027</b>	<b>331</b>	32	1028	330	1027	331	<b>1027</b>	<b>331</b>		
465.tonto	32	590	533	593	531	<b>593</b>	<b>531</b>	32	570	552	565	557	<b>565</b>	<b>557</b>		
470.lbm	32	672	655	670	656	<b>671</b>	<b>655</b>	32	672	655	670	656	<b>671</b>	<b>655</b>		
481.wrf	32	594	602	598	598	<b>597</b>	<b>599</b>	32	593	603	591	605	<b>592</b>	<b>604</b>		
482.sphinx3	32	1227	508	<b>1227</b>	<b>508</b>	1224	510	32	1227	508	<b>1227</b>	<b>508</b>	1224	510		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Custom  
Set Snoop Mode to ES

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 527

Huawei CH121 V3 (Intel Xeon E5-2630L v3)

SPECfp\_rate\_base2006 = 514

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Nov-2013

## Platform Notes (Continued)

```

Set Hyper-Threading to Disabled
Set Patrol Scrub to Disable
Baseboard Management Controller used to adjust the fan speed to 100%
Sysinfo program /spec/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Tue Feb  3 02:36:17 2015

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2630L v3 @ 1.80GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 8
  siblings     : 16
  physical 0   : cores 0 1 2 3 4 5 6 7
  physical 1   : cores 0 1 2 3 4 5 6 7
cache size     : 20480 KB

```

```

From /proc/meminfo
MemTotal:      264275292 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Feb 1 23:36

```

SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda1       ext4  268G  138G  117G  55% /

```

Additional information from dmidecode:

```

BIOS Insyde Corp. 1.13 08/12/2014
Memory:
 8x NO DIMM NO DIMM      3 rank
 8x Samsung M393A2G40DB0-CPB 16 GB 1867 MHz 1 rank
Continued on next page

```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 527

Huawei CH121 V3 (Intel Xeon E5-2630L v3)

SPECfp\_rate\_base2006 = 514

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Feb-2015  
Hardware Availability: Sep-2014  
Software Availability: Nov-2013

## Platform Notes (Continued)

8x Samsung M393A2G40DB0-CPB 16 GB 1867 MHz 2 rank

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
The Huawei CH121 V3 and Huawei CH222 V3 are electronically equivalent.  
The results have been measured on a Huawei CH121 V3 model

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 527

Huawei CH121 V3 (Intel Xeon E5-2630L v3)

SPECfp\_rate\_base2006 = 514

CPU2006 license: 3175

Test date: Feb-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Nov-2013

## Base Portability Flags (Continued)

```

450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 527

Huawei CH121 V3 (Intel Xeon E5-2630L v3)

SPECfp\_rate\_base2006 = 514

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Nov-2013

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
         -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
         -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
           -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
           -ansi-alias

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 527

Huawei CH121 V3 (Intel Xeon E5-2630L v3)

SPECfp\_rate\_base2006 = 514

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.xml>



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 527

Huawei CH121 V3 (Intel Xeon E5-2630L v3)

SPECfp\_rate\_base2006 = 514

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Nov-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Feb 25 11:30:07 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 24 February 2015.