



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## NEC Corporation

SPECfp<sup>®</sup>\_rate2006 = 346

Express5800/R120f-2M (Intel Xeon E5-2667 v3)

SPECfp\_rate\_base2006 = 336

CPU2006 license: 9006


Test date: Dec-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

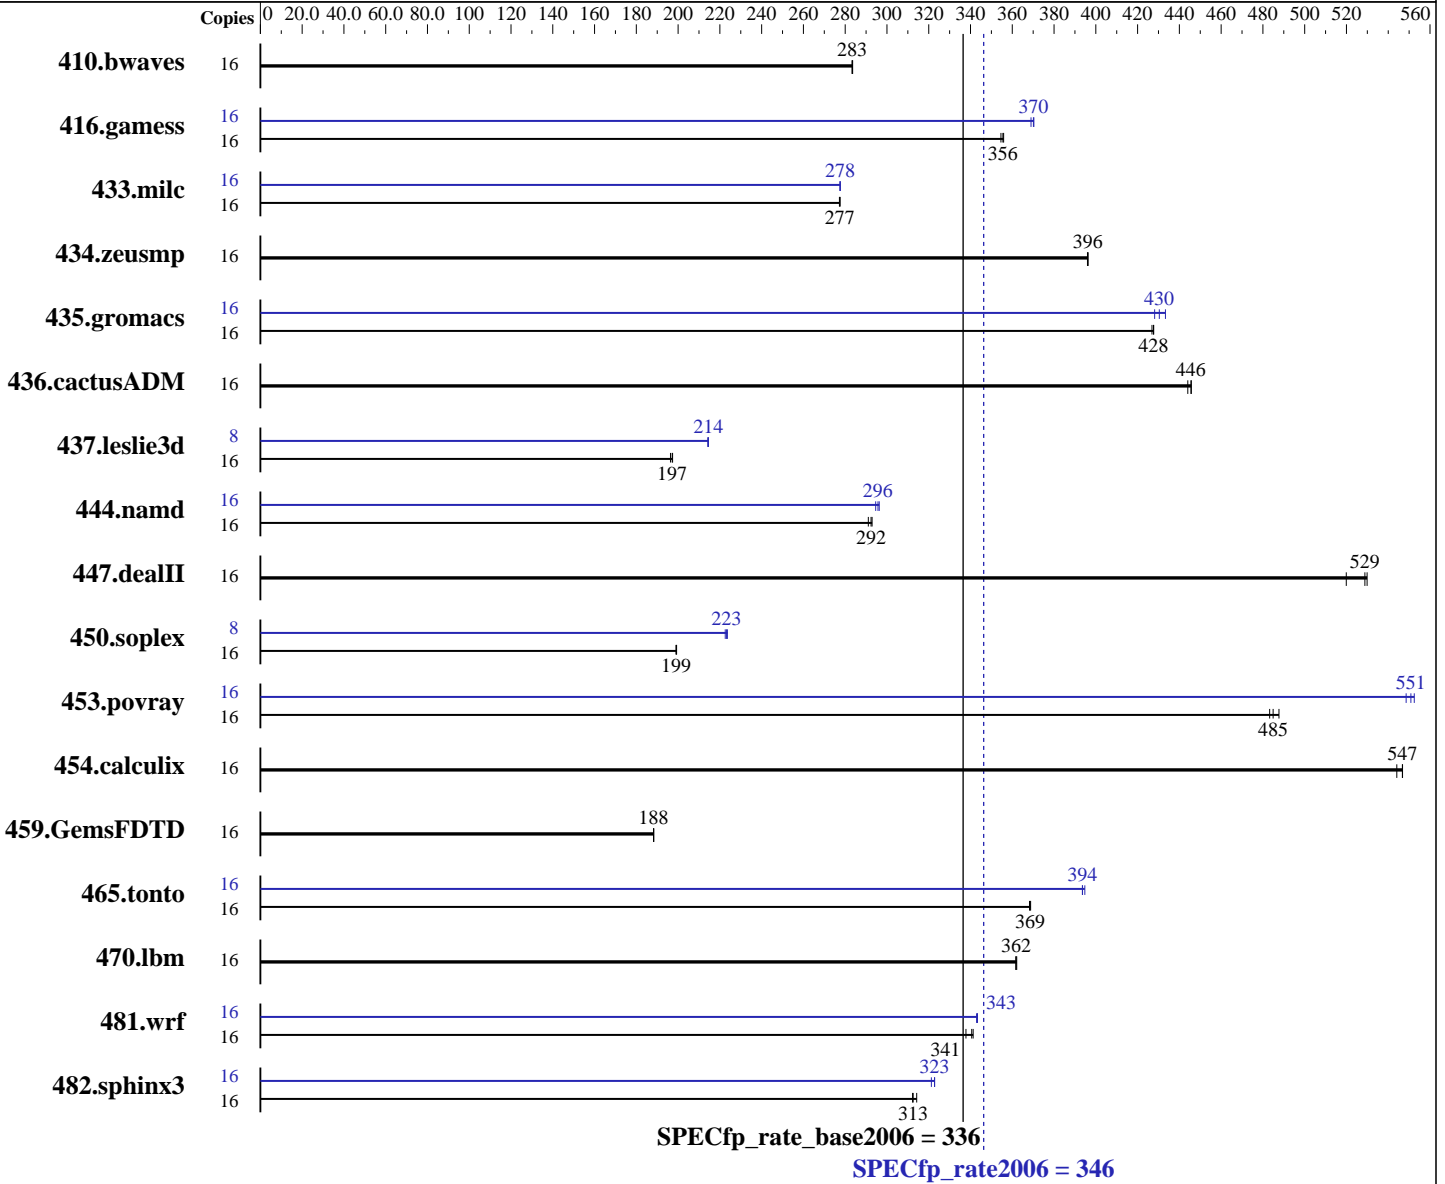

### Hardware

CPU Name: Intel Xeon E5-2667 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 3200  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 1 chip, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 Kernel 2.6.32-431.17.1.el6.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## NEC Corporation

SPECfp\_rate2006 = 346

Express5800/R120f-2M (Intel Xeon E5-2667 v3)

SPECfp\_rate\_base2006 = 336

CPU2006 license: 9006

Test date: Dec-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	<u>767</u>	<u>283</u>	767	283	767	284	16	<u>767</u>	<u>283</u>	767	283	767	284
416.gamess	16	880	356	<u>881</u>	<u>356</u>	884	355	16	<u>846</u>	<u>370</u>	846	370	849	369
433.milc	16	<u>529</u>	<u>277</u>	530	277	529	278	16	529	278	529	278	<u>529</u>	<u>278</u>
434.zeusmp	16	368	396	367	396	<u>368</u>	<u>396</u>	16	368	396	367	396	<u>368</u>	<u>396</u>
435.gromacs	16	<u>267</u>	<u>428</u>	267	428	268	427	16	<u>265</u>	<u>430</u>	264	433	267	428
436.cactusADM	16	431	444	<u>429</u>	<u>446</u>	429	446	16	431	444	<u>429</u>	<u>446</u>	429	446
437.leslie3d	16	766	196	<u>763</u>	<u>197</u>	762	197	8	351	214	<u>351</u>	<u>214</u>	351	214
444.namd	16	438	293	441	291	<u>439</u>	<u>292</u>	16	<u>434</u>	<u>296</u>	436	295	433	296
447.dealII	16	345	530	<u>346</u>	<u>529</u>	352	520	16	345	530	<u>346</u>	<u>529</u>	352	520
450.soplex	16	<u>670</u>	<u>199</u>	670	199	670	199	8	298	224	300	223	<u>299</u>	<u>223</u>
453.povray	16	<u>176</u>	<u>485</u>	176	483	175	488	16	154	552	<u>155</u>	<u>551</u>	155	549
454.calculix	16	<u>241</u>	<u>547</u>	243	544	241	547	16	<u>241</u>	<u>547</u>	243	544	241	547
459.GemsFDTD	16	<u>902</u>	<u>188</u>	902	188	902	188	16	<u>902</u>	<u>188</u>	902	188	902	188
465.tonto	16	428	368	<u>427</u>	<u>369</u>	427	369	16	399	395	<u>400</u>	<u>394</u>	400	394
470.lbm	16	608	362	607	362	<u>608</u>	<u>362</u>	16	608	362	607	362	<u>608</u>	<u>362</u>
481.wrf	16	524	341	529	338	<u>525</u>	<u>341</u>	16	<u>521</u>	<u>343</u>	521	343	521	343
482.sphinx3	16	992	314	999	312	<u>998</u>	<u>313</u>	16	<u>966</u>	<u>323</u>	966	323	971	321

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Power Management Policy: Custom  
Energy Performance: Performance

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp\_rate2006 = 346

Express5800/R120f-2M (Intel Xeon E5-2667 v3)

SPECfp\_rate\_base2006 = 336

CPU2006 license: 9006

Test date: Dec-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

## Platform Notes (Continued)

Patrol Scrub: Disabled

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1 > /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp\_rate2006 = 346

Express5800/R120f-2M (Intel Xeon E5-2667 v3)

SPECfp\_rate\_base2006 = 336

CPU2006 license: 9006

Test date: Dec-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

## Base Portability Flags (Continued)

482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp\_rate2006 = 346

Express5800/R120f-2M (Intel Xeon E5-2667 v3)

SPECfp\_rate\_base2006 = 336

CPU2006 license: 9006

Test date: Dec-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

## Peak Portability Flags (Continued)

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2)  
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
 -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
 -unroll2

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2)  
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias  
 -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2)  
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
 -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2)  
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4  
 -ansi-alias

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp\_rate2006 = 346

Express5800/R120f-2M (Intel Xeon E5-2667 v3)

SPECfp\_rate\_base2006 = 336

CPU2006 license: 9006

Test date: Dec-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120f-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120f-RevB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Mar 10 16:02:55 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 March 2015.