



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 206

PowerEdge T330 (Intel Xeon E3-1225 v5, 3.30 GHz)

SPECint_rate_base2006 = 200

CPU2006 license: 55


Test date: Oct-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

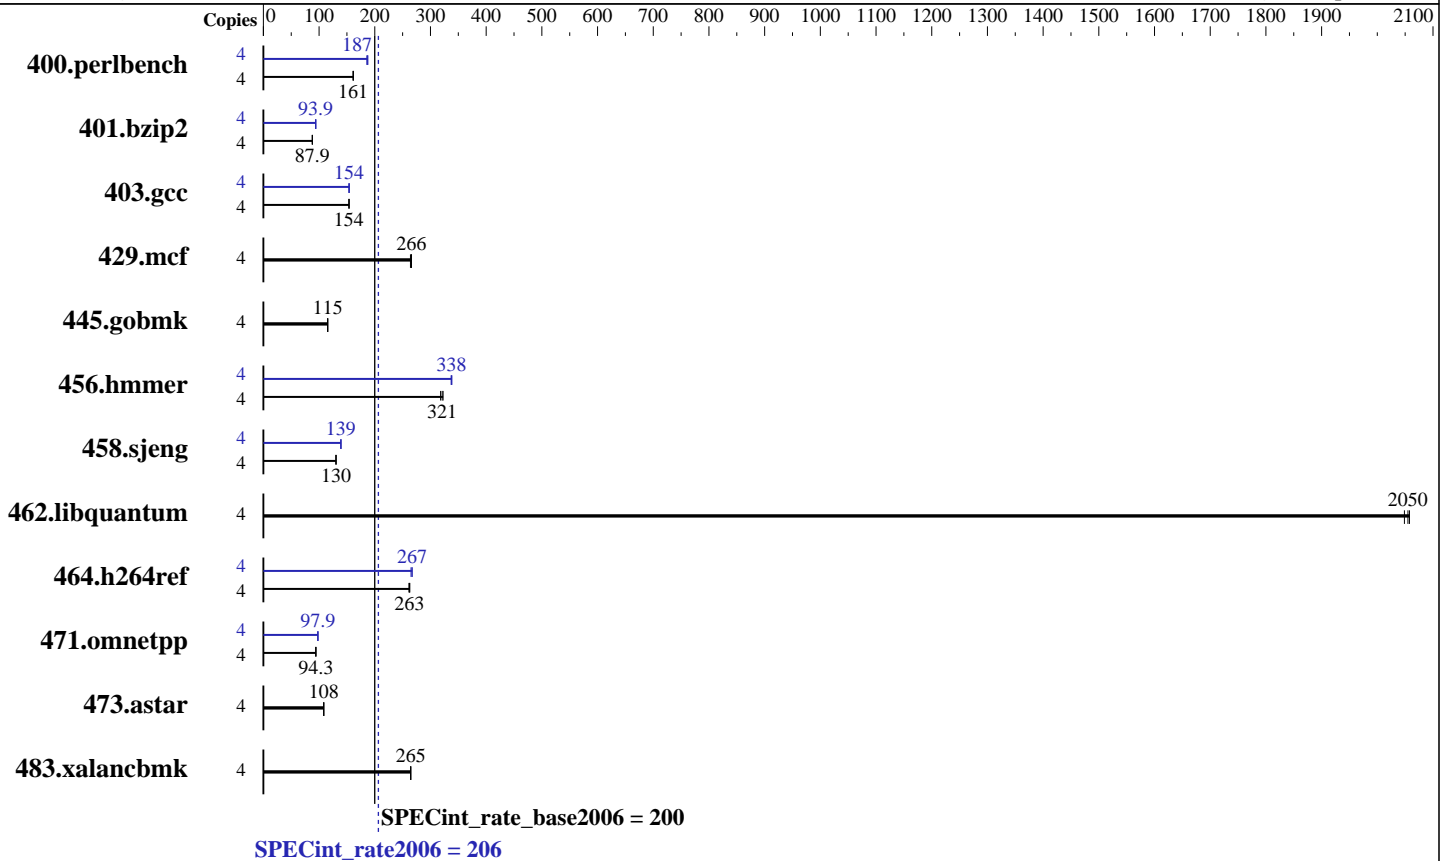

Hardware

CPU Name: Intel Xeon E3-1225 v5
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 3300
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2133P-U)
 Disk Subsystem: 1 x 500 GB 7200 RPM SATA
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12
 3.12.28-4-default
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 206

PowerEdge T330 (Intel Xeon E3-1225 v5, 3.30 GHz)

SPECint_rate_base2006 = 200

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Oct-2015
Hardware Availability: Nov-2015
Software Availability: Sep-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	<u>242</u>	<u>161</u>	242	161	242	162	4	208	187	<u>209</u>	<u>187</u>	210	186
401.bzip2	4	439	88.0	439	87.9	<u>439</u>	<u>87.9</u>	4	<u>411</u>	<u>93.9</u>	409	94.3	412	93.7
403.gcc	4	<u>209</u>	<u>154</u>	209	154	209	154	4	209	154	<u>209</u>	<u>154</u>	210	154
429.mcf	4	137	266	<u>137</u>	<u>266</u>	138	264	4	137	266	<u>137</u>	<u>266</u>	138	264
445.gobmk	4	364	115	363	116	<u>363</u>	<u>115</u>	4	364	115	363	116	<u>363</u>	<u>115</u>
456.hammer	4	<u>116</u>	<u>321</u>	117	318	116	323	4	111	337	<u>111</u>	<u>338</u>	110	338
458.sjeng	4	371	130	371	130	<u>371</u>	<u>130</u>	4	347	139	348	139	<u>348</u>	<u>139</u>
462.libquantum	4	<u>40.3</u>	<u>2050</u>	40.3	2060	40.5	2050	4	<u>40.3</u>	<u>2050</u>	40.3	2060	40.5	2050
464.h264ref	4	337	263	339	261	<u>337</u>	<u>263</u>	4	331	267	334	265	<u>332</u>	<u>267</u>
471.omnetpp	4	265	94.3	<u>265</u>	<u>94.3</u>	266	94.1	4	256	97.7	<u>255</u>	<u>97.9</u>	255	98.0
473.astar	4	259	108	<u>259</u>	<u>108</u>	259	108	4	259	108	<u>259</u>	<u>108</u>	259	108
483.xalancbmk	4	104	265	104	264	<u>104</u>	<u>265</u>	4	104	265	104	264	<u>104</u>	<u>265</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
Virtualization Technology disabled
System Profile set to Performance
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 # \$ e3fbb8667b5a285932ceab81e28219e1
running on linux-l6fb Fri Oct 2 07:28:27 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1225 v5 @ 3.30GHz
1 "physical id"s (chips)
4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 206

PowerEdge T330 (Intel Xeon E3-1225 v5, 3.30 GHz)

SPECint_rate_base2006 = 200

CPU2006 license: 55

Test date: Oct-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

Platform Notes (Continued)

```

caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
  cache size : 8192 KB

```

```

From /proc/meminfo
MemTotal:      66066084 kB
HugePages_Total:    0
Hugepagesize:   2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"

```

```

uname -a:
Linux linux-16fb 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Oct 2 07:27

```

SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  451G  8.4G  442G   2% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 0.3.16 09/09/2015

```

Memory:
1x 00AD00000000 HMA82GU7MFR8N-TF 16 GB 2 rank 2133 MHz
2x 00AD0000020B HMA82GU7MFR8N-TF 16 GB 2 rank 2133 MHz
1x 00AD00000800 HMA82GU7MFR8N-TF 16 GB 2 rank 2133 MHz

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 206

PowerEdge T330 (Intel Xeon E3-1225 v5, 3.30 GHz)

SPECint_rate_base2006 = 200

CPU2006 license: 55

Test date: Oct-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

Platform Notes (Continued)

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 206

PowerEdge T330 (Intel Xeon E3-1225 v5, 3.30 GHz)

SPECint_rate_base2006 = 200

CPU2006 license: 55

Test date: Oct-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

Base Optimization Flags (Continued)

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmarthearp

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64

403.gcc: -D_FILE_OFFSET_BITS=64

429.mcf: -D_FILE_OFFSET_BITS=64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64

458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64

462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

464.h264ref: -D_FILE_OFFSET_BITS=64

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -D_FILE_OFFSET_BITS=64

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 206

PowerEdge T330 (Intel Xeon E3-1225 v5, 3.30 GHz)

SPECint_rate_base2006 = 200

CPU2006 license: 55

Test date: Oct-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
 -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: basepeak = yes

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias
 -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 206

PowerEdge T330 (Intel Xeon E3-1225 v5, 3.30 GHz)

SPECint_rate_base2006 = 200

CPU2006 license: 55

Test date: Oct-2015

Test sponsor: Dell Inc.

Hardware Availability: Nov-2015

Tested by: Dell Inc.

Software Availability: Sep-2015

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Nov 17 19:17:23 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 November 2015.