



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3950 X6
(Intel Xeon E7-8860 v3, 2.20 GHz)

SPECfp®_rate2006 = 3590

SPECfp_rate_base2006 = 3500

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Oct-2015

Hardware Availability: Jul-2015

Software Availability: Oct-2014

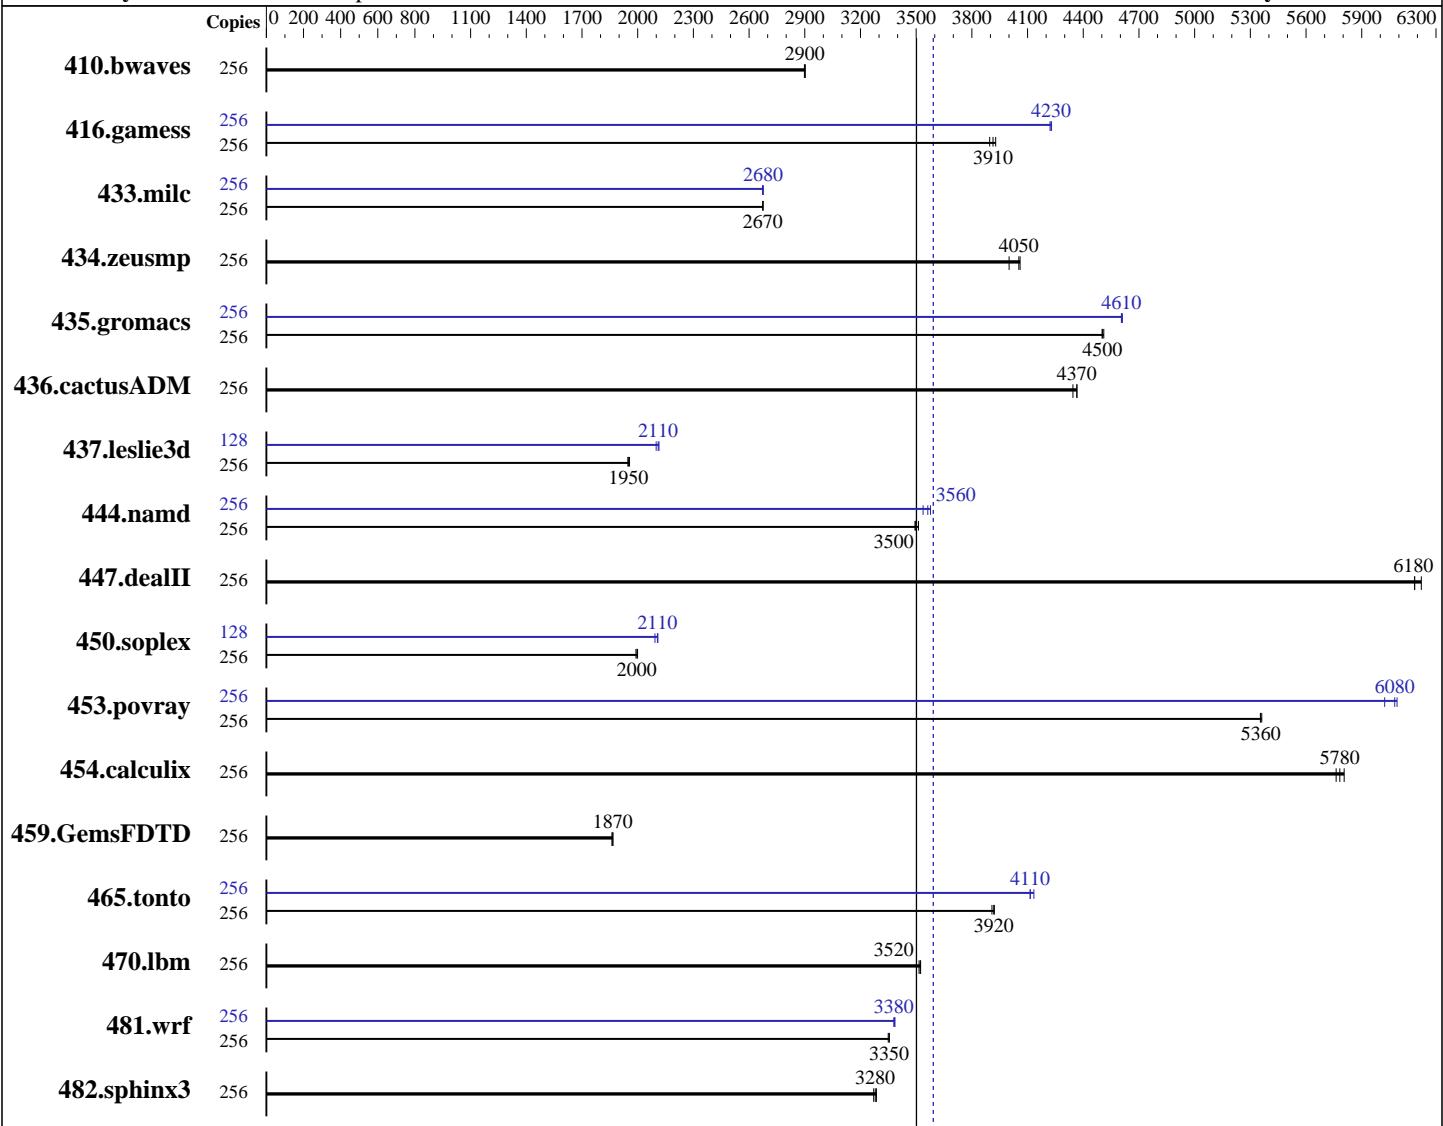

SPECfp_rate_base2006 = 3500

SPECfp_rate2006 = 3590

Hardware

CPU Name: Intel Xeon E7-8860 v3
CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz: 2200
FPU: Integrated
CPU(s) enabled: 128 cores, 8 chips, 16 cores/chip, 2 threads/core
CPU(s) orderable: 4,6,8 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) 3.12.28-4-default
Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: xfs
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3950 X6
(Intel Xeon E7-8860 v3, 2.20 GHz)

SPECfp_rate2006 = 3590

SPECfp_rate_base2006 = 3500

CPU2006 license: 9017

Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

L3 Cache:	40 MB I+D on chip per chip
Other Cache:	None
Memory:	2 TB (128 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem:	1 x 400 GB SSD
Other Hardware:	None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	256	<u>1199</u>	<u>2900</u>	1199	2900	1200	2900	256	<u>1199</u>	<u>2900</u>	1199	2900	1200	2900
416.gamess	256	<u>1281</u>	<u>3910</u>	1276	3930	1287	3900	256	1188	4220	1185	4230	<u>1186</u>	<u>4230</u>
433.milc	256	879	2670	879	2670	<u>879</u>	<u>2670</u>	256	<u>878</u>	<u>2680</u>	880	2670	878	2680
434.zeusmp	256	574	4060	582	4000	<u>575</u>	<u>4050</u>	256	574	4060	582	4000	<u>575</u>	<u>4050</u>
435.gromacs	256	<u>406</u>	<u>4500</u>	405	4510	406	4500	256	396	4610	<u>397</u>	<u>4610</u>	397	4610
436.cactusADM	256	704	4340	701	4370	<u>701</u>	<u>4370</u>	256	704	4340	701	4370	<u>701</u>	<u>4370</u>
437.leslie3d	256	1236	1950	<u>1233</u>	<u>1950</u>	1230	1960	128	<u>570</u>	<u>2110</u>	569	2110	573	2100
444.namd	256	585	3510	<u>587</u>	<u>3500</u>	588	3490	256	574	3580	<u>576</u>	<u>3560</u>	580	3540
447.dealII	256	471	6220	474	6180	<u>474</u>	<u>6180</u>	256	471	6220	474	6180	<u>474</u>	<u>6180</u>
450.soplex	256	1068	2000	1073	1990	<u>1070</u>	<u>2000</u>	128	<u>507</u>	<u>2110</u>	506	2110	510	2090
453.povray	256	<u>254</u>	<u>5360</u>	254	5350	254	5360	256	226	6020	224	6090	<u>224</u>	<u>6080</u>
454.calculix	256	<u>365</u>	<u>5780</u>	364	5810	367	5760	256	<u>365</u>	<u>5780</u>	364	5810	367	5760
459.GemsFDTD	256	1459	1860	1455	1870	<u>1455</u>	<u>1870</u>	256	1459	1860	1455	1870	<u>1455</u>	<u>1870</u>
465.tonto	256	<u>643</u>	<u>3920</u>	642	3920	645	3910	256	612	4110	<u>612</u>	<u>4110</u>	609	4130
470.lbm	256	998	3520	<u>999</u>	<u>3520</u>	1001	3520	256	998	3520	<u>999</u>	<u>3520</u>	1001	3520
481.wrf	256	854	3350	<u>852</u>	<u>3350</u>	852	3360	256	<u>845</u>	<u>3380</u>	846	3380	845	3390
482.sphinx3	256	<u>1521</u>	<u>3280</u>	1518	3290	1525	3270	256	<u>1521</u>	<u>3280</u>	1518	3290	1525	3270

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Operating Mode set to Custom in BIOS
Cstates disabled in BIOS
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6914
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3950 X6
(Intel Xeon E7-8860 v3, 2.20 GHz)

SPECfp_rate2006 = 3590

SPECfp_rate_base2006 = 3500

CPU2006 license: 9017

Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

Platform Notes (Continued)

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on linux-lea3 Wed Oct 7 01:06:02 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E7-8860 v3 @ 2.20GHz
        8 "physical id"s (chips)
        256 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 16
    siblings : 32
    physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
    physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
    physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
    physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
    physical 4: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
    physical 5: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
    physical 6: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
    physical 7: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
    cache size : 40960 KB
```

```
From /proc/meminfo
MemTotal:      2117730656 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 0
    # This file is deprecated and will be removed in a future service pack or
    # release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12"
    VERSION_ID="12"
    PRETTY_NAME="SUSE Linux Enterprise Server 12"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3950 X6
(Intel Xeon E7-8860 v3, 2.20 GHz)

SPECfp_rate2006 = 3590

SPECfp_rate_base2006 = 3500

CPU2006 license: 9017

Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

Platform Notes (Continued)

```
Linux linux-lea3 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 6 11:52 last=5
```

```
SPEC is set to: /cpu2006.1.2
```

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	371G	7.9G	363G	3%	/

```
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS IBM -[A9E125JUS-2.00]- 06/18/2015
```

Memory:

126x Hynix HMA42GR7MFR4N-TF	16 GB	2 rank	2133 MHz	configured at 1600 MHz
2x Hynix HMA42GR7MFR4N-TFTD	16 GB	2 rank	2133 MHz	configured at 1600 MHz
64x NO DIMM	Unknown			

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3950 X6
(Intel Xeon E7-8860 v3, 2.20 GHz)

SPECfp_rate2006 = 3590

SPECfp_rate_base2006 = 3500

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Oct-2015

Hardware Availability: Jul-2015

Software Availability: Oct-2014

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
  434.zeusmp: -DSPEC_CPU_LP64
  435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
  454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
      481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
  482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3950 X6
(Intel Xeon E7-8860 v3, 2.20 GHz)

SPECfp_rate2006 = 3590

SPECfp_rate_base2006 = 3500

CPU2006 license: 9017

Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3950 X6
(Intel Xeon E7-8860 v3, 2.20 GHz)

SPECfp_rate2006 = 3590

SPECfp_rate_base2006 = 3500

CPU2006 license: 9017

Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3950 X6
(Intel Xeon E7-8860 v3, 2.20 GHz)

SPECfp_rate2006 = 3590

SPECfp_rate_base2006 = 3500

CPU2006 license: 9017

Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-CC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-CC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Apr 12 12:14:29 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 April 2016.