



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028R-TR  
(X10DRI , Intel Xeon E5-2650 v4)

**SPECfp®2006 = 113**

**SPECfp\_base2006 = 109**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

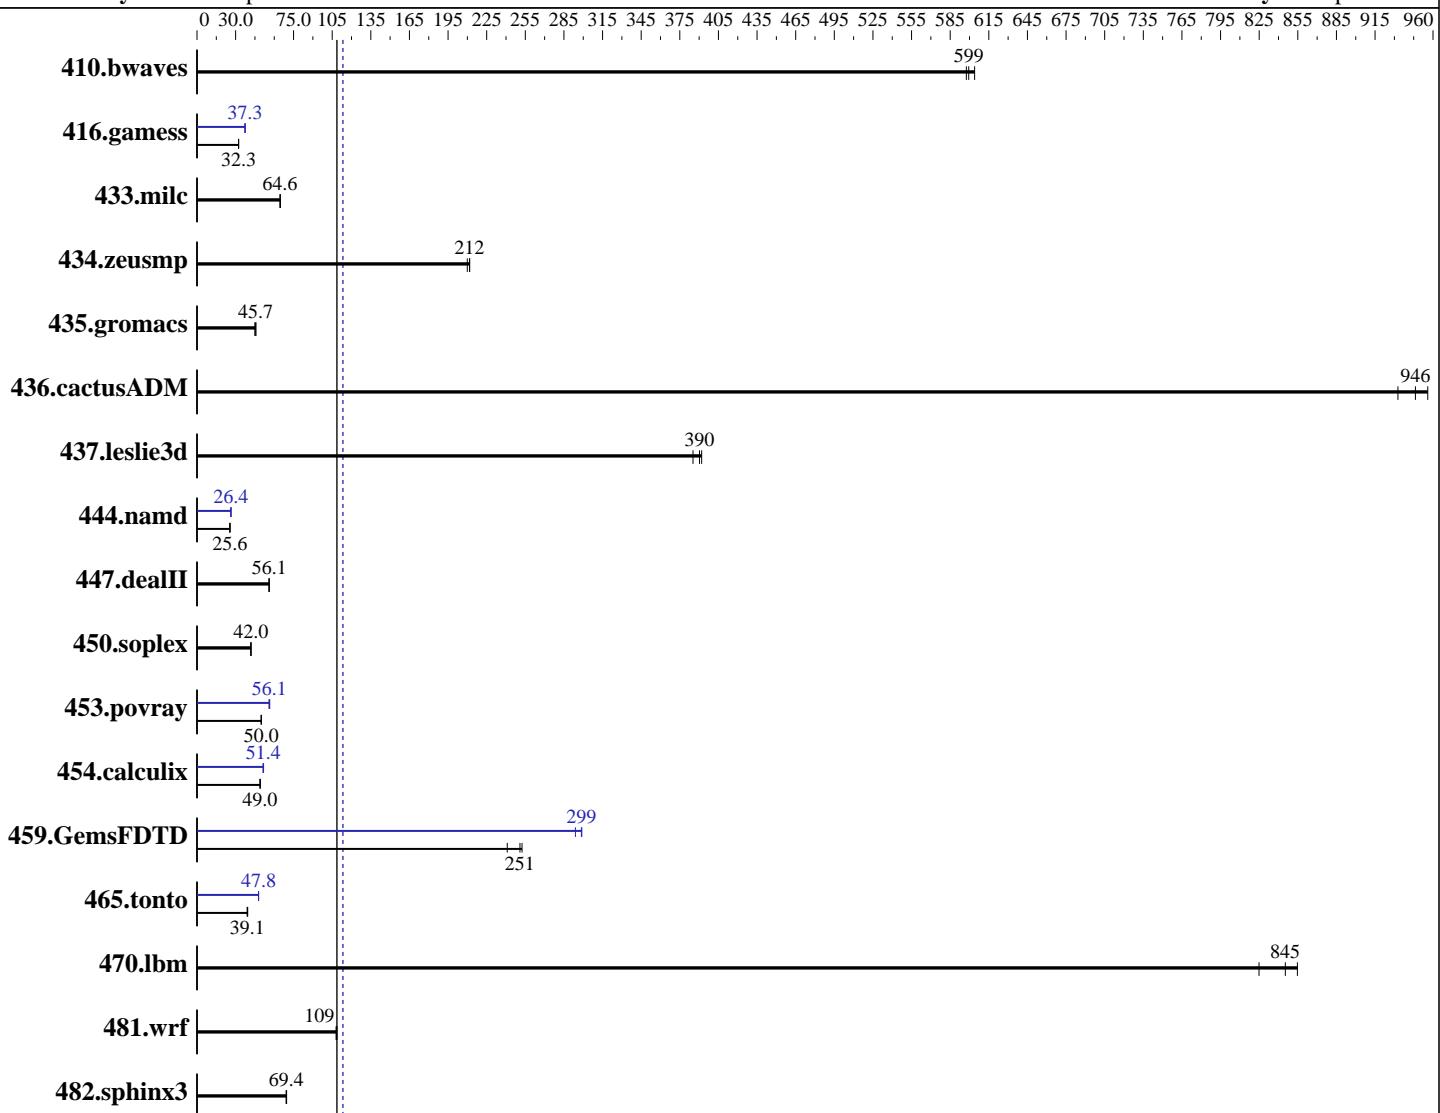

**SPECfp\_base2006 = 109**

**SPECfp2006 = 113**

### Hardware

CPU Name: Intel Xeon E5-2650 v4  
CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
CPU MHz: 2200  
FPU: Integrated  
CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Kernel 3.12.49-11-default  
Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
Auto Parallel: Yes  
File System: xfs  
System State: Run level 5  
Base Pointers: 64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028R-TR  
(X10DRI , Intel Xeon E5-2650 v4)

**SPECfp2006 = 113**

**SPECfp\_base2006 = 109**

CPU2006 license: 001176

Test date: Apr-2016

Test sponsor: Supermicro

Hardware Availability: Mar-2016

Tested by: Supermicro

Software Availability: Sep-2015

L3 Cache: 30 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)  
Disk Subsystem: 1 x 300 GB SATA III , 10000 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	22.5	604	22.7	598	<u>22.7</u>	<u>599</u>	22.5	604	22.7	598	<u>22.7</u>	<u>599</u>
416.gamess	607	32.2	<u>606</u>	<u>32.3</u>	605	32.3	<u>524</u>	<u>37.3</u>	524	37.4	<u>525</u>	<u>37.3</u>
433.milc	142	64.7	<u>142</u>	<u>64.6</u>	142	64.5	<u>142</u>	<u>64.7</u>	<u>142</u>	<u>64.6</u>	142	64.5
434.zeusmp	<u>43.0</u>	<u>212</u>	43.3	210	43.0	212	<u>43.0</u>	<u>212</u>	43.3	210	43.0	212
435.gromacs	<u>156</u>	<u>45.7</u>	159	44.9	156	45.7	<u>156</u>	<u>45.7</u>	159	44.9	156	45.7
436.cactusADM	12.8	933	12.5	956	<u>12.6</u>	<u>946</u>	12.8	933	12.5	956	<u>12.6</u>	<u>946</u>
437.leslie3d	24.0	392	<u>24.1</u>	<u>390</u>	24.4	385	24.0	392	<u>24.1</u>	<u>390</u>	24.4	385
444.namd	314	25.5	313	25.6	<u>313</u>	<u>25.6</u>	305	26.3	304	26.4	<u>304</u>	<u>26.4</u>
447.dealII	204	56.1	<u>204</u>	<u>56.1</u>	204	55.9	204	56.1	<u>204</u>	<u>56.1</u>	204	55.9
450.soplex	<u>199</u>	<u>42.0</u>	200	41.8	199	42.0	<u>199</u>	<u>42.0</u>	200	41.8	199	42.0
453.povray	<u>106</u>	<u>50.0</u>	107	49.8	106	50.1	<u>94.8</u>	<u>56.1</u>	95.0	56.0	94.2	56.5
454.calculix	168	49.1	168	49.0	<u>168</u>	<u>49.0</u>	160	51.7	<u>160</u>	<u>51.4</u>	161	51.4
459.GemsFDTD	<u>42.3</u>	<u>251</u>	42.0	252	44.0	241	<u>36.1</u>	<u>294</u>	35.5	299	<u>35.5</u>	<u>299</u>
465.tonto	<u>252</u>	<u>39.1</u>	250	39.4	252	39.1	<u>206</u>	<u>47.8</u>	206	47.9	206	47.8
470.lbm	16.7	825	<u>16.3</u>	<u>845</u>	16.1	855	<u>16.7</u>	<u>825</u>	<u>16.3</u>	<u>845</u>	16.1	855
481.wrf	<u>103</u>	<u>109</u>	103	109	103	108	<u>103</u>	<u>109</u>	103	109	103	108
482.sphinx3	280	69.6	<u>281</u>	<u>69.4</u>	281	69.3	<u>280</u>	<u>69.6</u>	<u>281</u>	<u>69.4</u>	281	69.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Early Snoop = Disable

Home Dir Snoop with IVT- Style OSB = Disable

Enforce POR = Disabled

Hyper-Threading (ALL) = Disable

Sysinfo program /home/SPEC2K6/SPEC2006-V12/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on 113-172 Fri Apr 22 00:50:21 2016

This section contains SUT (System Under Test) info as seen by  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028R-TR  
(X10DRI , Intel Xeon E5-2650 v4)

SPECfp2006 =

113

SPECfp\_base2006 =

109

CPU2006 license: 001176

Test date: Apr-2016

Test sponsor: Supermicro

Hardware Availability: Mar-2016

Tested by: Supermicro

Software Availability: Sep-2015

## Platform Notes (Continued)

some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2650 v4@ 2.20GHz
        2 "physical id"s (chips)
        24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 12
    siblings   : 12
    physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
    physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 30720 KB
```

```
From /proc/meminfo
MemTotal:      264365724 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP1
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP1"
    VERSION_ID="12.1"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux 113-172 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 5 Apr 21 19:05
```

```
SPEC is set to: /home/SPEC2K6/SPEC2006-V12
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/md126p4    xfs   237G  9.0G  228G   4% /home
Additional information from dmidecode:
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028R-TR  
(X10DRI , Intel Xeon E5-2650 v4)

**SPECfp2006 = 113**

**SPECfp\_base2006 = 109**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Apr-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Sep-2015

## Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.0 12/30/2015

Memory:

16x Hynix Semiconductor HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/SPEC2K6/SPEC2006-V12/libs/32:/home/SPEC2K6/SPEC2006-V12/libs/64:/home/SPEC2K6/SPEC2006-V12/sh"

OMP\_NUM\_THREADS = "24"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028R-TR  
(X10DRI , Intel Xeon E5-2650 v4)

**SPECfp2006 = 113**

**SPECfp\_base2006 = 109**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Apr-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Sep-2015

## Base Portability Flags (Continued)

```
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028R-TR  
(X10DRI , Intel Xeon E5-2650 v4)

**SPECfp2006 = 113**

**SPECfp\_base2006 = 109**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Apr-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Sep-2015

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

447.dealII: basepeak = yes

450.soplex: basepeak = yes

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14
            -ansi-alias
```

Fortran benchmarks:

410.bwaves: basepeak = yes

```
416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
             -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
             -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
             -inline-level=0 -scalar-rep-
```

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

```
459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
                -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
                -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
                -inline-level=0 -opt-prefetch -parallel
```

```
465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028R-TR  
(X10DRI , Intel Xeon E5-2650 v4)

**SPECfp2006 =** 113

**SPECfp\_base2006 =** 109

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Apr-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Sep-2015

## Peak Optimization Flags (Continued)

465.tonto (continued):

-opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 17 16:51:42 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 May 2016.