



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®_rate2006 = 533

Express5800/R120g-1M (Intel Xeon E5-2650 v4)

SPECint_rate_base2006 = 508

CPU2006 license: 9006


Test date: May-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

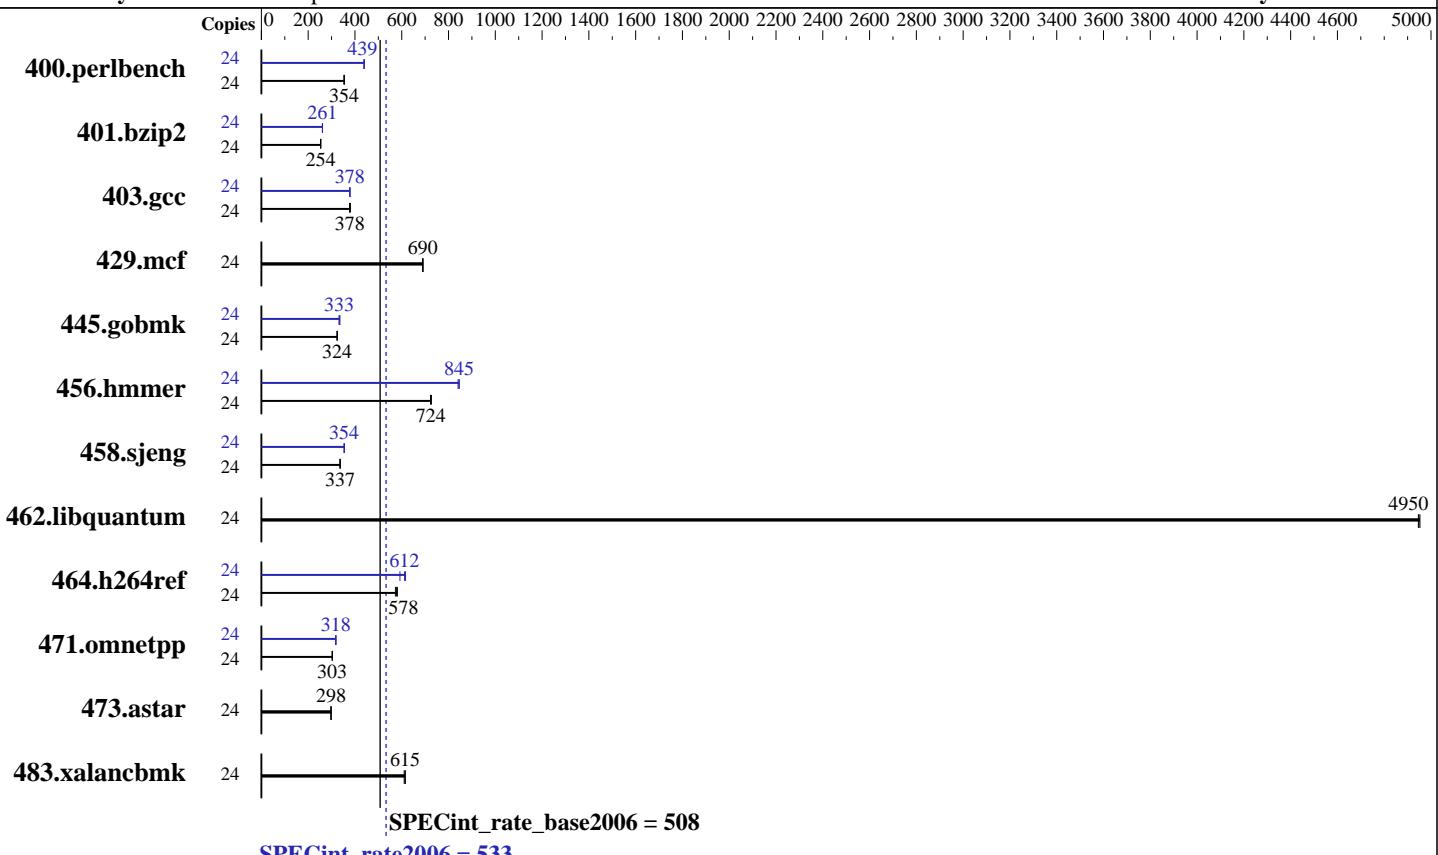

Hardware

CPU Name:	Intel Xeon E5-2650 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 2.90 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	12 cores, 1 chip, 12 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	30 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (8 x 16 GB 2Rx4 PC4-2400T-R)
Disk Subsystem:	1 x 1 TB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.2 (Maipo)
Compiler:	Kernel 3.10.0-327.45.el7.x86_64
Auto Parallel:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
File System:	No
System State:	ext4
Base Pointers:	Run level 3 (multi-user)
Peak Pointers:	32-bit
Other Software:	32/64-bit
	Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 533

Express5800/R120g-1M (Intel Xeon E5-2650 v4)

SPECint_rate_base2006 = 508

CPU2006 license: 9006

Test date: May-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	661	355	664	353	663	354	24	534	439	534	439	533	440
401.bzip2	24	912	254	913	254	915	253	24	887	261	888	261	886	261
403.gcc	24	513	377	508	380	511	378	24	511	378	511	378	510	379
429.mcf	24	317	690	317	691	318	689	24	317	690	317	691	318	689
445.gobmk	24	776	324	777	324	778	323	24	750	336	757	332	756	333
456.hammer	24	309	724	308	727	310	723	24	266	841	265	845	265	846
458.sjeng	24	863	337	862	337	864	336	24	818	355	820	354	821	354
462.libquantum	24	100	4950	100	4950	101	4950	24	100	4950	100	4950	101	4950
464.h264ref	24	914	581	927	573	919	578	24	868	612	897	592	862	616
471.omnetpp	24	495	303	494	304	495	303	24	472	318	471	318	471	319
473.astar	24	565	298	566	298	566	298	24	565	298	566	298	566	298
483.xalancbmk	24	271	610	269	615	269	615	24	271	610	269	615	269	615

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

Power Management Policy: Custom

Energy Performance: Performance

Patrol Scrub: Disabled

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

The Express5800/R120g-1M (Intel Xeon E5-2650 v4) and the Express5800/R120g-2M (Intel Xeon E5-2650 v4) models are electronically equivalent. The results have been measured on the Express5800/R120g-2M (Intel Xeon E5-2650 v4) model.

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120g-1M (Intel Xeon E5-2650 v4)

SPECint_rate2006 = 533

CPU2006 license: 9006

Test date: May-2016

Hardware Availability: Apr-2016

Software Availability: Jan-2016

General Notes (Continued)

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmr: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120g-1M (Intel Xeon E5-2650 v4)

SPECint_rate2006 = 533

SPECint_rate_base2006 = 508

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2016

Hardware Availability: Apr-2016

Software Availability: Jan-2016

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Peak Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
               -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
               -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32
```

```
401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
               -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
               -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
               -auto-ilp32 -ansi-alias
```

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120g-1M (Intel Xeon E5-2650 v4)

SPECint_rate2006 = 533

SPECint_rate_base2006 = 508

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2016

Hardware Availability: Apr-2016

Software Availability: Jan-2016

Peak Optimization Flags (Continued)

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias
-opt-mem-layout-trans=3

456.hummer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gnu: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevC.xml>



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120g-1M (Intel Xeon E5-2650 v4)

SPECint_rate2006 = 533

SPECint_rate_base2006 = 508

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2016

Hardware Availability: Apr-2016

Software Availability: Jan-2016

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jun 1 19:10:58 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 June 2016.