



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen9  
(3.50 GHz, Intel Xeon E5-2637 v4)

SPECfp®2006 = 112

SPECfp\_base2006 = 109

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

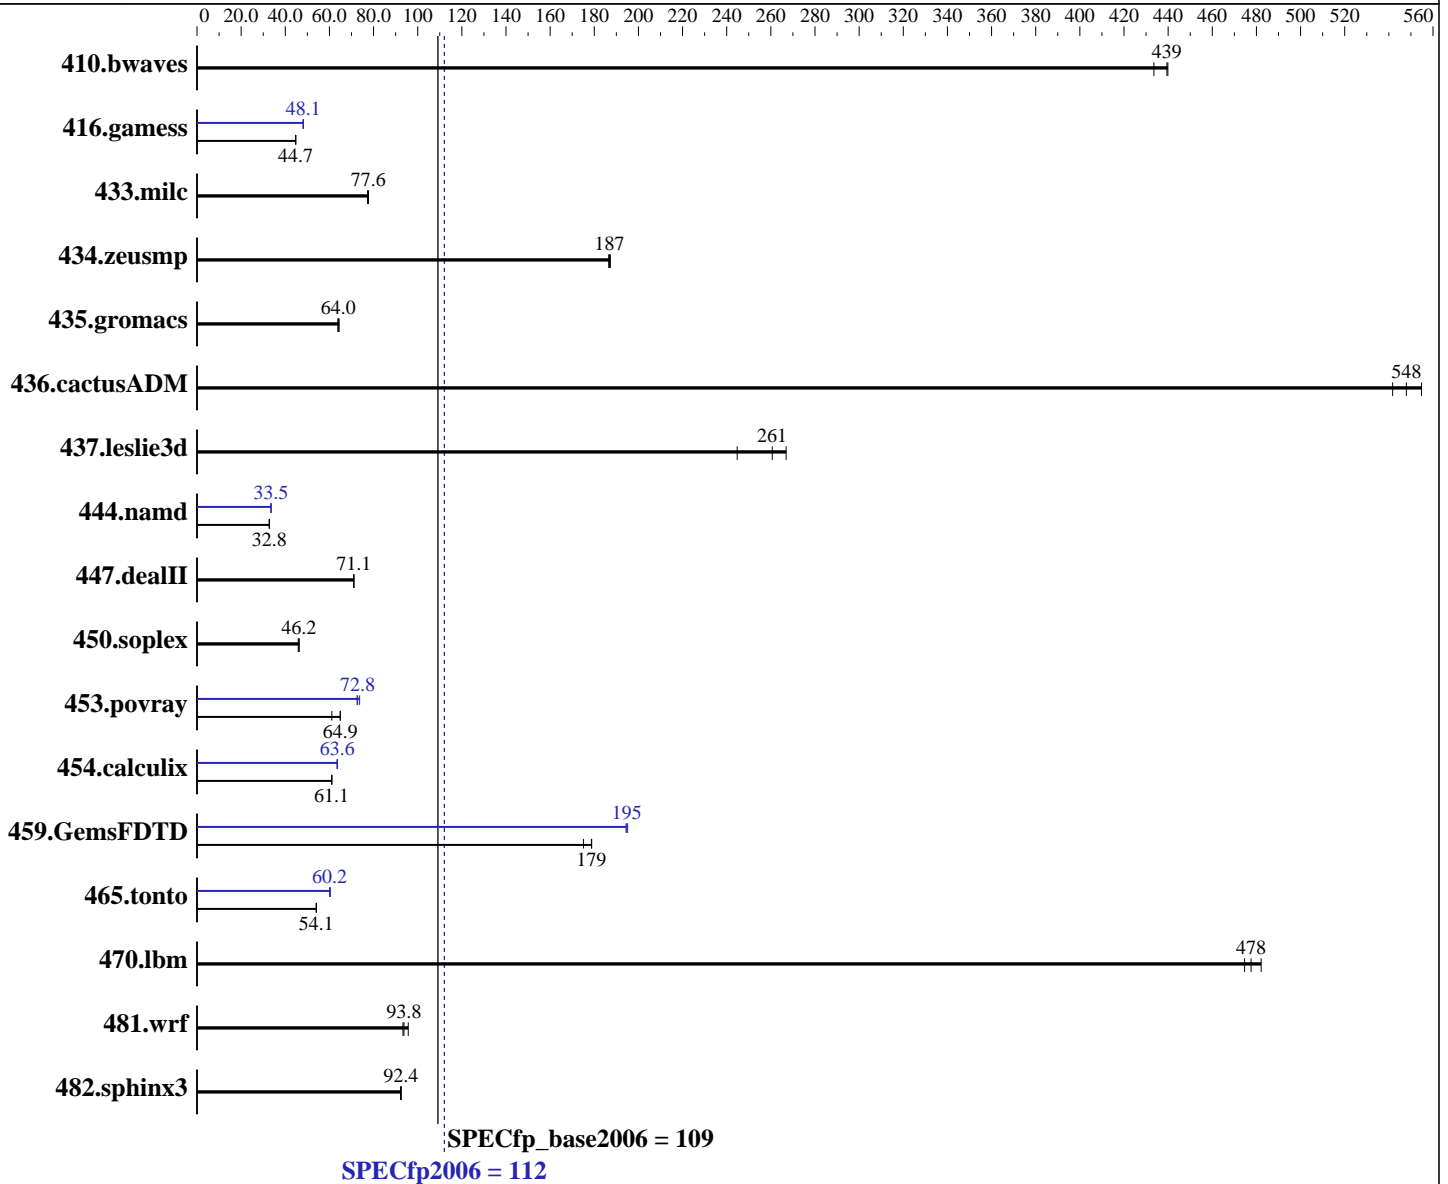

## Hardware

CPU Name: Intel Xeon E5-2637 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 3500  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86\_64)  
 Kernel 3.12.49-11-default  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen9

(3.50 GHz, Intel Xeon E5-2637 v4)

SPECfp2006 = 112

SPECfp\_base2006 = 109

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2400T-R)  
Disk Subsystem: 1 x 800 GB SAS SSD, RAID 1  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	31.3	434	30.9	440	<b><u>30.9</u></b>	<b><u>439</u></b>	31.3	434	30.9	440	<b><u>30.9</u></b>	<b><u>439</u></b>
416.gamess	<b><u>438</u></b>	<b><u>44.7</u></b>	438	44.8	438	44.7	407	48.1	406	48.2	<b><u>407</u></b>	<b><u>48.1</u></b>
433.milc	<b><u>118</u></b>	<b><u>77.6</u></b>	118	77.7	119	77.3	<b><u>118</u></b>	<b><u>77.6</u></b>	118	77.7	119	77.3
434.zeusmp	48.8	187	48.6	187	<b><u>48.7</u></b>	<b><u>187</u></b>	48.8	187	48.6	187	<b><u>48.7</u></b>	<b><u>187</u></b>
435.gromacs	<b><u>111</u></b>	<b><u>64.0</u></b>	111	64.4	112	63.8	<b><u>111</u></b>	<b><u>64.0</u></b>	111	64.4	112	63.8
436.cactusADM	22.1	542	21.5	555	<b><u>21.8</u></b>	<b><u>548</u></b>	22.1	542	21.5	555	<b><u>21.8</u></b>	<b><u>548</u></b>
437.leslie3d	<b><u>36.1</u></b>	<b><u>261</u></b>	38.4	245	35.2	267	<b><u>36.1</u></b>	<b><u>261</u></b>	38.4	245	35.2	267
444.namd	245	32.8	<b><u>245</u></b>	<b><u>32.8</u></b>	245	32.8	<b><u>239</u></b>	<b><u>33.5</u></b>	239	33.5	239	33.5
447.dealII	161	71.1	<b><u>161</u></b>	<b><u>71.1</u></b>	161	70.9	161	71.1	<b><u>161</u></b>	<b><u>71.1</u></b>	161	70.9
450.soplex	182	45.9	<b><u>181</u></b>	<b><u>46.2</u></b>	180	46.3	182	45.9	<b><u>181</u></b>	<b><u>46.2</u></b>	180	46.3
453.povray	82.0	64.9	<b><u>82.0</u></b>	<b><u>64.9</u></b>	87.1	61.1	<b><u>73.1</u></b>	<b><u>72.8</u></b>	72.2	73.7	73.4	72.5
454.calculix	135	61.1	135	61.0	<b><u>135</u></b>	<b><u>61.1</u></b>	130	63.4	<b><u>130</u></b>	<b><u>63.6</u></b>	130	63.6
459.GemsFDTD	60.6	175	<b><u>59.4</u></b>	<b><u>179</u></b>	59.3	179	54.4	195	<b><u>54.5</u></b>	<b><u>195</u></b>	54.6	194
465.tonto	182	54.0	<b><u>182</u></b>	<b><u>54.1</u></b>	182	54.1	<b><u>164</u></b>	<b><u>60.2</u></b>	163	60.4	164	60.1
470.lbm	28.9	475	28.5	482	<b><u>28.8</u></b>	<b><u>478</u></b>	28.9	475	28.5	482	<b><u>28.8</u></b>	<b><u>478</u></b>
481.wrf	<b><u>119</u></b>	<b><u>93.8</u></b>	117	95.7	120	93.3	<b><u>119</u></b>	<b><u>93.8</u></b>	117	95.7	120	93.3
482.sphinx3	211	92.2	<b><u>211</u></b>	<b><u>92.4</u></b>	211	92.5	211	92.2	<b><u>211</u></b>	<b><u>92.4</u></b>	211	92.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Platform Notes

BIOS Configuration:

Intel Hyperthreading Option set to Enabled

Power Profile set to Custom

Power Regulator set to Static High Performance Mode

Minimum Processor Idle Power Core C-State set to C1E State

Minimum Processor Idle Power Package C-State set to No Package State

Collaborative Power Control set to Disabled

QPI Snoop Configuration set to Home Snoop

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 2



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen9**  
(3.50 GHz, Intel Xeon E5-2637 v4)

**SPECfp2006 = 112**

**SPECfp\_base2006 = 109**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Apr-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Dec-2015

## Platform Notes (Continued)

Thermal Configuration set to Maximum Cooling  
Processor Power and Utilization Monitoring set to Disabled  
Memory Refresh Rate set to 1x Refresh  
Energy Performance Bias set to Maximum Performance

Sysinfo program

```
/home/specuser/cpu2006/HP_build_ic16_suite_corrected_int_bins/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-szds Fri Apr 29 00:37:13 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2637 v4 @ 3.50GHz
 2 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 8
  physical 0: cores 0 1 2 3
  physical 1: cores 0 1 2 3
 cache size : 15360 KB
```

From /proc/meminfo

```
MemTotal:      529095464 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

/usr/bin/lsb\_release -d

```
SUSE Linux Enterprise Server 12 SP1
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
 SUSE Linux Enterprise Server 12 (x86_64)
 VERSION = 12
 PATCHLEVEL = 1
 # This file is deprecated and will be removed in a future service pack or
 release.
 # Please check /etc/os-release for details about this release.
os-release:
 NAME="SLES"
 VERSION="12-SP1"
 VERSION_ID="12.1"
 PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
 ID="sles"
 ANSI_COLOR="0;32"
 CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

uname -a:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen9**

(3.50 GHz, Intel Xeon E5-2637 v4)

**SPECfp2006 =**

**112**

**SPECfp\_base2006 =**

**109**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Apr-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Dec-2015

## Platform Notes (Continued)

```
Linux linux-szds 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 29 00:36
```

SPEC is set to:

```
/home/specuser/cpu2006/HP_build_icl6_suite_corrected_int_bins/cpu2006
```

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   703G  279G  424G  40% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS HP P92 03/23/2016
```

Memory:

```
8x UNKNOWN NOT AVAILABLE
```

```
16x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz
```

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have one line reading as:  
16x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz

## General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,1,0"
```

```
OMP_NUM_THREADS = "8"
```

```
LD_LIBRARY_PATH = "/home/specuser/cpu2006/HP_build_icl6_suite_corrected_int_bins/cpu2006/lib64:/home/specuser/cpu2006/HP_build_icl6_suite_corrected_int_bins/cpu2006/lib64:/home/specuser/cpu2006/HP_build_icl6_suite_corrected_int_bins/cpu2006/sh"
```

Binaries compiled on a system with 1x Intel Xeon E5-2660 v4 CPU + 128GB memory using RedHat EL 7.2

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen9

(3.50 GHz, Intel Xeon E5-2637 v4)

SPECfp2006 =

112

SPECfp\_base2006 =

109

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias -fp-model fast=2
-qopt-prefetch-issue-excl-hint

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
-fp-model fast=2
-qopt-prefetch-issue-excl-hint

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-fp-model fast=2
-qopt-prefetch-issue-excl-hint

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias -fp-model fast=2
-qopt-prefetch-issue-excl-hint

```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen9

(3.50 GHz, Intel Xeon E5-2637 v4)

SPECfp2006 =

112

SPECfp\_base2006 =

109

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

## Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen9**

(3.50 GHz, Intel Xeon E5-2637 v4)

**SPECfp2006 =**

**112**

**SPECfp\_base2006 =**

**109**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Apr-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Dec-2015

## Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-HSW-revF.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-HSW-revF.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jun 1 19:11:11 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 1 June 2016.