



SPEC[®] CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5038A-I
(X10SRA , Intel Xeon E5-2648L v4)

SPECint[®]_rate2006 = 522

SPECint_rate_base2006 = 498

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

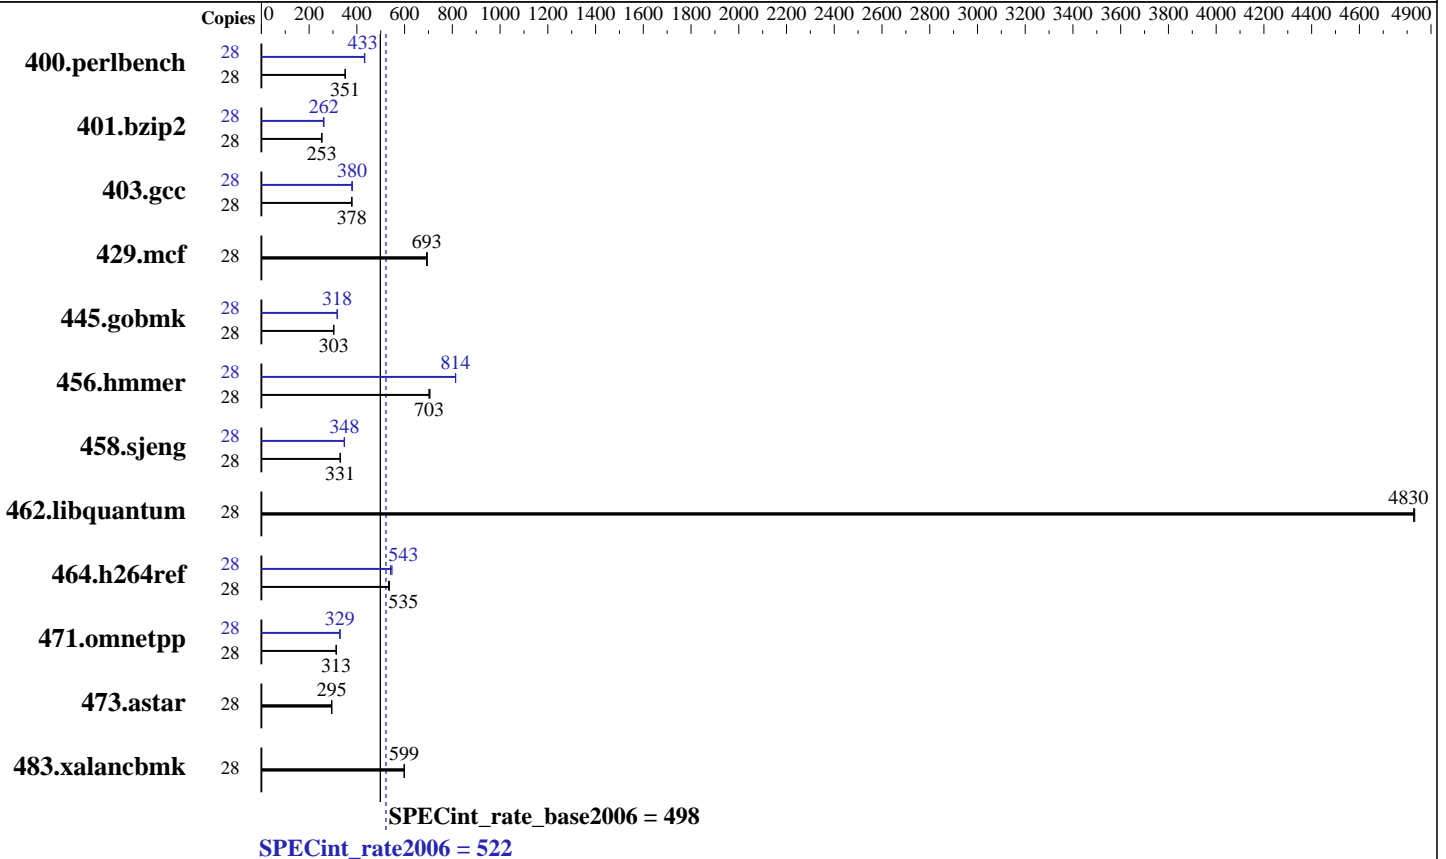

Hardware

CPU Name: Intel Xeon E5-2648L v4
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 14 cores, 1 chip, 14 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 35 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-2400T-R)
 Disk Subsystem: 1 x 1000 GB SATA III, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.2, Kernel 3.10.0-327.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5038A-I
(X10SRA , Intel Xeon E5-2648L v4)

SPECint_rate2006 = 522

SPECint_rate_base2006 = 498

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2016
Hardware Availability: Mar-2016
Software Availability: Sep-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	28	<u>779</u>	<u>351</u>	779	351	778	351	28	632	433	<u>632</u>	<u>433</u>	634	431
401.bzip2	28	<u>1067</u>	<u>253</u>	1071	252	1065	254	28	<u>1033</u>	<u>262</u>	1033	262	1039	260
403.gcc	28	593	380	<u>596</u>	<u>378</u>	597	378	28	<u>593</u>	<u>380</u>	591	381	594	379
429.mcf	28	369	692	367	695	<u>368</u>	<u>693</u>	28	369	692	367	695	<u>368</u>	<u>693</u>
445.gobmk	28	969	303	970	303	<u>969</u>	<u>303</u>	28	925	318	924	318	<u>924</u>	<u>318</u>
456.hammer	28	<u>371</u>	<u>703</u>	372	702	370	706	28	321	814	321	814	<u>321</u>	<u>814</u>
458.sjeng	28	1026	330	<u>1025</u>	<u>331</u>	1024	331	28	974	348	<u>975</u>	<u>348</u>	975	347
462.libquantum	28	120	4830	120	4830	<u>120</u>	<u>4830</u>	28	120	4830	120	4830	<u>120</u>	<u>4830</u>
464.h264ref	28	1163	533	<u>1158</u>	<u>535</u>	1154	537	28	1132	547	1145	541	<u>1141</u>	<u>543</u>
471.omnetpp	28	556	315	<u>558</u>	<u>313</u>	559	313	28	532	329	531	329	<u>531</u>	<u>329</u>
473.astar	28	667	295	<u>667</u>	<u>295</u>	668	294	28	667	295	<u>667</u>	<u>295</u>	668	294
483.xalancbmk	28	<u>323</u>	<u>599</u>	323	599	323	598	28	<u>323</u>	<u>599</u>	323	599	323	598

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Enforce POR = Disabled
Memory Frequency = 2400
Sysinfo program /home/cpu2006_ic16/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Wed May 25 16:11:37 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2648L v4@ 1.80GHz
1 "physical id"s (chips)
28 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SPECint_rate2006 = 522

SuperWorkstation 5038A-I
(X10SRA , Intel Xeon E5-2648L v4)

SPECint_rate_base2006 = 498

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2016
Hardware Availability: Mar-2016
Software Availability: Sep-2015

Platform Notes (Continued)

```
caution.)
  cpu cores : 14
  siblings  : 28
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
  cache size : 35840 KB
```

```
From /proc/meminfo
MemTotal:      263851532 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.2 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.2"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29
EDT 2015 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 25 15:48
```

```
SPEC is set to: /home/cpu2006_ic16
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   216G  5.5G  211G   3% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 2.0 01/28/2016
Memory:
  8x Micron 36ASF4G72PZ-2G3A1 32 GB 2 rank 2400 MHz
```

(End of data from sysinfo program)



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5038A-I
(X10SRA , Intel Xeon E5-2648L v4)

SPECint_rate2006 = 522

SPECint_rate_base2006 = 498

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2016
Hardware Availability: Mar-2016
Software Availability: Sep-2015

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006_ic16/libs/32:/home/cpu2006_ic16/libs/64:/home/cpu2006_ic16/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
memory using RedHat EL 7.1
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks:
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5038A-I
(X10SRA , Intel Xeon E5-2648L v4)

SPECint_rate2006 = 522

SPECint_rate_base2006 = 498

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2016
Hardware Availability: Mar-2016
Software Availability: Sep-2015

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalanbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5038A-I
(X10SRA , Intel Xeon E5-2648L v4)

SPECint_rate2006 = 522

SPECint_rate_base2006 = 498

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

Peak Optimization Flags (Continued)

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias
-opt-mem-layout-trans=3

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5038A-I
(X10SRA , Intel Xeon E5-2648L v4)

SPECint_rate2006 = 522

SPECint_rate_base2006 = 498

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jun 30 14:07:34 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 June 2016.