



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_®_rate2006 = 1590

PowerEdge R930 (Intel Xeon E7-4830 v4, 2.00 GHz)

SPECfp_rate_base2006 = 1560

CPU2006 license: 55


Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

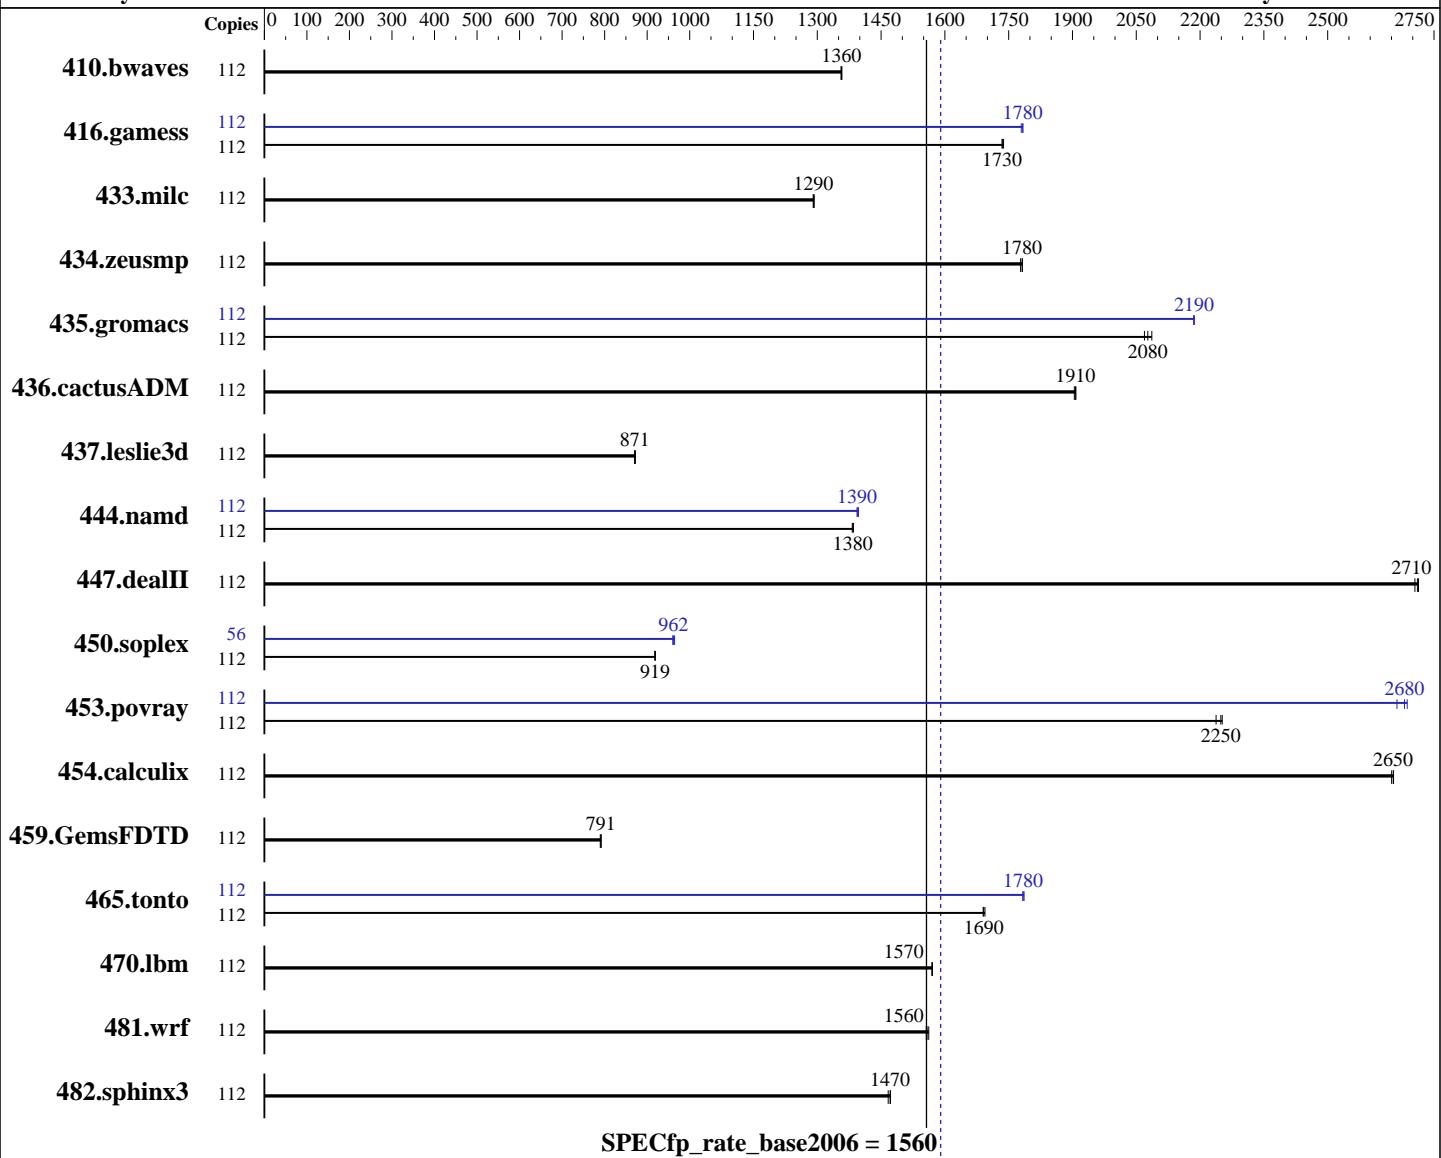

Hardware

CPU Name: Intel Xeon E7-4830 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 56 cores, 4 chips, 14 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default
 Compiler: C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.2.181 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1590

PowerEdge R930 (Intel Xeon E7-4830 v4, 2.00 GHz)

SPECfp_rate_base2006 = 1560

CPU2006 license: 55

Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

L3 Cache: 35 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1333 MHz)
 Disk Subsystem: 1 x 480 GB SAS SSD
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	112	1122	1360	1123	1360	1121	1360	112	1122	1360	1123	1360	1121	1360
416.gamess	112	1262	1740	1264	1730	1264	1730	112	1230	1780	1230	1780	1232	1780
433.milc	112	797	1290	797	1290	795	1290	112	797	1290	797	1290	795	1290
434.zeusmp	112	572	1780	573	1780	572	1780	112	572	1780	573	1780	572	1780
435.gromacs	112	383	2090	386	2070	385	2080	112	366	2190	366	2190	366	2190
436.cactusADM	112	702	1910	701	1910	703	1900	112	702	1910	701	1910	703	1900
437.leslie3d	112	1209	871	1207	872	1209	871	112	1209	871	1207	872	1209	871
444.namd	112	650	1380	649	1380	649	1380	112	644	1390	643	1400	644	1390
447.dealII	112	474	2710	473	2710	472	2710	112	474	2710	473	2710	472	2710
450.soplex	112	1016	919	1018	918	1016	919	56	484	964	486	960	486	962
453.povray	112	265	2250	265	2250	266	2240	112	224	2660	222	2680	222	2690
454.calculix	112	349	2650	348	2650	348	2650	112	349	2650	348	2650	348	2650
459.GemsFDTD	112	1505	790	1502	791	1501	792	112	1505	790	1502	791	1501	792
465.tonto	112	652	1690	650	1690	652	1690	112	618	1780	618	1780	617	1790
470.lbm	112	980	1570	980	1570	981	1570	112	980	1570	980	1570	981	1570
481.wrf	112	803	1560	801	1560	804	1560	112	803	1560	801	1560	804	1560
482.sphinx3	112	1483	1470	1484	1470	1488	1470	112	1483	1470	1484	1470	1488	1470

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:

Snoop Mode set to Cluster on Die

Virtualization Technology disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1590

PowerEdge R930 (Intel Xeon E7-4830 v4, 2.00 GHz)

SPECfp_rate_base2006 = 1560

CPU2006 license: 55

Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

Platform Notes (Continued)

System Profile set to custom
CPU Performance set to Hardware P States
C States set to Autonomous
C1E disabled
Energy Efficient Turbo disabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Balanced Performance
Memory Patrol Scrub disabled
Sysinfo program /root/ic16.0_Sept12_2015/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on bdx-perf03 Mon May 9 11:19:01 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-4830 v4 @ 2.00GHz
 4 "physical id"s (chips)
 112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
 cpu cores : 14
 siblings : 28
 physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
 physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
 physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
 physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 17920 KB

From /proc/meminfo
MemTotal: 529321536 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP1

From /etc/*release* /etc/*version*
SuSE-release:
 SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
This file is deprecated and will be removed in a future service pack or release.
Please check /etc/os-release for details about this release.
os-release:
 NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1590

PowerEdge R930 (Intel Xeon E7-4830 v4, 2.00 GHz)

SPECfp_rate_base2006 = 1560

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: May-2016

Hardware Availability: Jun-2016

Software Availability: Mar-2016

Platform Notes (Continued)

```
ID="sles"  
ANSI_COLOR="0;32"  
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:  
Linux bdx-perf03 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015  
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 9 10:40
```

```
SPEC is set to: /root/ic16.0_Sept12_2015  
Filesystem      Type  Size  Used  Avail Use% Mounted on  
/dev/sda3        xfs   368G   36G  332G  10% /  
Additional information from dmidecode:
```

```
Warning: Use caution when you interpret this section. The 'dmidecode' program  
reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to  
hardware, firmware, and the "DMTF SMBIOS" standard.
```

```
BIOS Dell Inc. 2.0.1 04/20/2016  
Memory:  
32x 00AD00B300AD HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz, configured at 1333  
MHz  
64x Not Specified Not Specified
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/ic16.0_Sept12_2015/libs/32:/root/ic16.0_Sept12_2015/libs/64:/root/ic16.0_Sept12_2015/sh"
```

```
Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB  
memory using RedHat EL 7.2 glibc 2.17  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1590

PowerEdge R930 (Intel Xeon E7-4830 v4, 2.00 GHz)

SPECfp_rate_base2006 = 1560

CPU2006 license: 55

Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1590

PowerEdge R930 (Intel Xeon E7-4830 v4, 2.00 GHz)

SPECfp_rate_base2006 = 1560

CPU2006 license: 55

Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1590

PowerEdge R930 (Intel Xeon E7-4830 v4, 2.00 GHz)

SPECfp_rate_base2006 = 1560

CPU2006 license: 55

Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1590

PowerEdge R930 (Intel Xeon E7-4830 v4, 2.00 GHz)

SPECfp_rate_base2006 = 1560

CPU2006 license: 55

Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jun 28 17:29:39 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 June 2016.