



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint®\_rate2006 = 2100

Lenovo System x3850 X6 Essential  
(2.10 GHz, Intel Xeon E7-4850 v4)

SPECint\_rate\_base2006 = 2030

CPU2006 license: 9017


Test date: Jul-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Jun-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

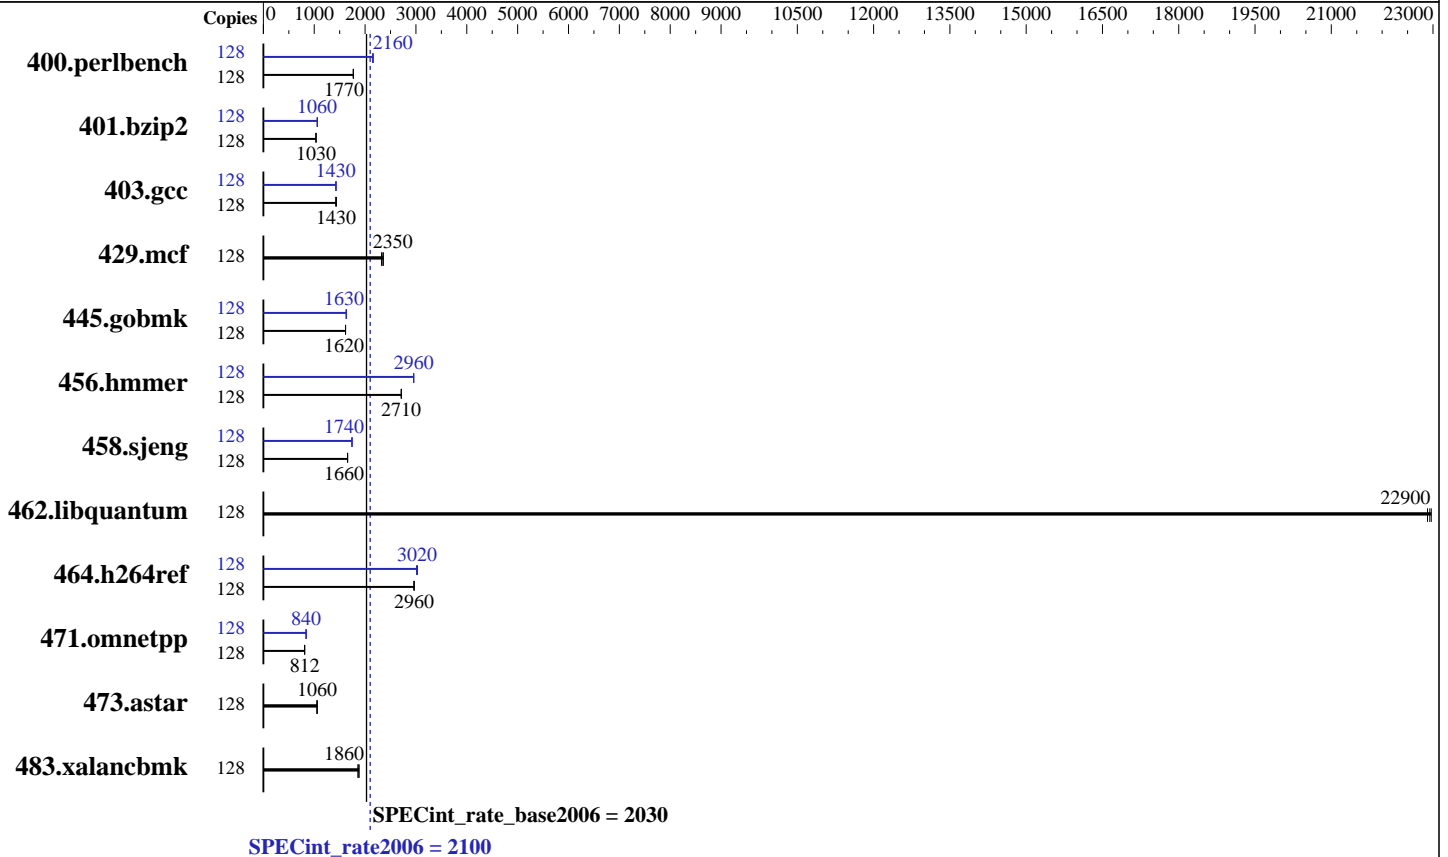

### Hardware

CPU Name: Intel Xeon E7-4850 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 40 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2133P-R, running at 1333 MHz)  
 Disk Subsystem: 1 x 800 GB SATA SSD  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86\_64)  
 Kernel 3.12.49-11-default  
 Compiler: C/C++; Version 16.0.2.181 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint\_rate2006 = 2100

Lenovo System x3850 X6 Essential  
(2.10 GHz, Intel Xeon E7-4850 v4)

SPECint\_rate\_base2006 = 2030

CPU2006 license: 9017

Test date: Jul-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Jun-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	128	707	1770	<b>707</b>	<b>1770</b>	707	1770	128	582	2150	<b>580</b>	<b>2160</b>	579	2160
401.bzip2	128	1192	1040	1196	1030	<b>1194</b>	<b>1030</b>	128	1164	1060	<b>1166</b>	<b>1060</b>	1166	1060
403.gcc	128	724	1420	<b>720</b>	<b>1430</b>	718	1430	128	722	1430	721	1430	<b>722</b>	<b>1430</b>
429.mcf	128	<b>497</b>	<b>2350</b>	503	2320	495	2360	128	<b>497</b>	<b>2350</b>	503	2320	495	2360
445.gobmk	128	<b>831</b>	<b>1620</b>	831	1620	831	1620	128	<b>824</b>	<b>1630</b>	823	1630	824	1630
456.hammer	128	441	2710	<b>440</b>	<b>2710</b>	440	2710	128	404	2960	<b>404</b>	<b>2960</b>	404	2950
458.sjeng	128	935	1660	935	1660	<b>935</b>	<b>1660</b>	128	889	1740	888	1740	<b>889</b>	<b>1740</b>
462.libquantum	128	115	23000	<b>116</b>	<b>22900</b>	116	22900	128	115	23000	<b>116</b>	<b>22900</b>	116	22900
464.h264ref	128	955	2970	957	2960	<b>956</b>	<b>2960</b>	128	935	3030	940	3010	<b>937</b>	<b>3020</b>
471.omnetpp	128	985	812	<b>985</b>	<b>812</b>	989	809	128	952	841	953	840	<b>952</b>	<b>840</b>
473.astar	128	<b>851</b>	<b>1060</b>	852	1060	851	1060	128	<b>851</b>	<b>1060</b>	852	1060	851	1060
483.xalancbmk	128	<b>474</b>	<b>1860</b>	469	1880	475	1860	128	<b>474</b>	<b>1860</b>	469	1880	475	1860

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop\_caches

## Platform Notes

BIOS Configuration:  
Operating Mode set to "Maximum Performance"  
COD Preference set to Enable  
Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on Draco-02 Wed Jul 13 09:48:13 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E7-4850 v4 @ 2.10GHz  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint\_rate2006 = 2100

Lenovo System x3850 X6 Essential  
(2.10 GHz, Intel Xeon E7-4850 v4)

SPECint\_rate\_base2006 = 2030

CPU2006 license: 9017

Test date: Jul-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Jun-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

### Platform Notes (Continued)

```

4 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 16
siblings  : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size : 20480 KB

```

```

From /proc/meminfo
MemTotal:      529155652 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"

```

```

uname -a:
Linux Draco-02 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Jul 13 09:40

```

SPEC is set to: /home/cpu2006-1.2-ic16.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   688G  4.9G  683G   1% /home
Additional information from dmidecode:

```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO -[A9E135CUS-3.10]- 06/16/2016  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint\_rate2006 = 2100

Lenovo System x3850 X6 Essential  
(2.10 GHz, Intel Xeon E7-4850 v4)

SPECint\_rate\_base2006 = 2030

CPU2006 license: 9017

Test date: Jul-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Jun-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

## Platform Notes (Continued)

### Memory:

16x Hynix HMA84GR7MFR4N-UH 32 GB 2 rank 2400 MHz, configured at 1333 MHz  
80x NO DIMM Unknown

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"
```

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB  
memory using RedHat EL 7.2 glibc 2.17

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

## Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalanbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint\_rate2006 = 2100**

Lenovo System x3850 X6 Essential  
(2.10 GHz, Intel Xeon E7-4850 v4)

**SPECint\_rate\_base2006 = 2030**

**CPU2006 license:** 9017

**Test date:** Jul-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jun-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Mar-2016

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64

403.gcc: -D\_FILE\_OFFSET\_BITS=64

429.mcf: -D\_FILE\_OFFSET\_BITS=64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmer: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64

458.sjeng: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64

462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

464.h264ref: -D\_FILE\_OFFSET\_BITS=64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -D\_FILE\_OFFSET\_BITS=64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint\_rate2006 = 2100**

Lenovo System x3850 X6 Essential  
(2.10 GHz, Intel Xeon E7-4850 v4)

**SPECint\_rate\_base2006 = 2030**

**CPU2006 license:** 9017

**Test date:** Jul-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jun-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Mar-2016

## Peak Portability Flags (Continued)

483.xalanbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias  
-opt-mem-layout-trans=3

456.hmmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint\_rate2006 = 2100**

Lenovo System x3850 X6 Essential  
(2.10 GHz, Intel Xeon E7-4850 v4)

**SPECint\_rate\_base2006 = 2030**

**CPU2006 license:** 9017

**Test date:** Jul-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jun-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Mar-2016

## Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Sep 6 16:58:34 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 September 2016.