



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A8-8650 with
Radeon R7 Graphics)

SPECfp®_rate2006 = 69.2

SPECfp_rate_base2006 = 68.5

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2016

Hardware Availability: Dec-2015

Software Availability: Aug-2015

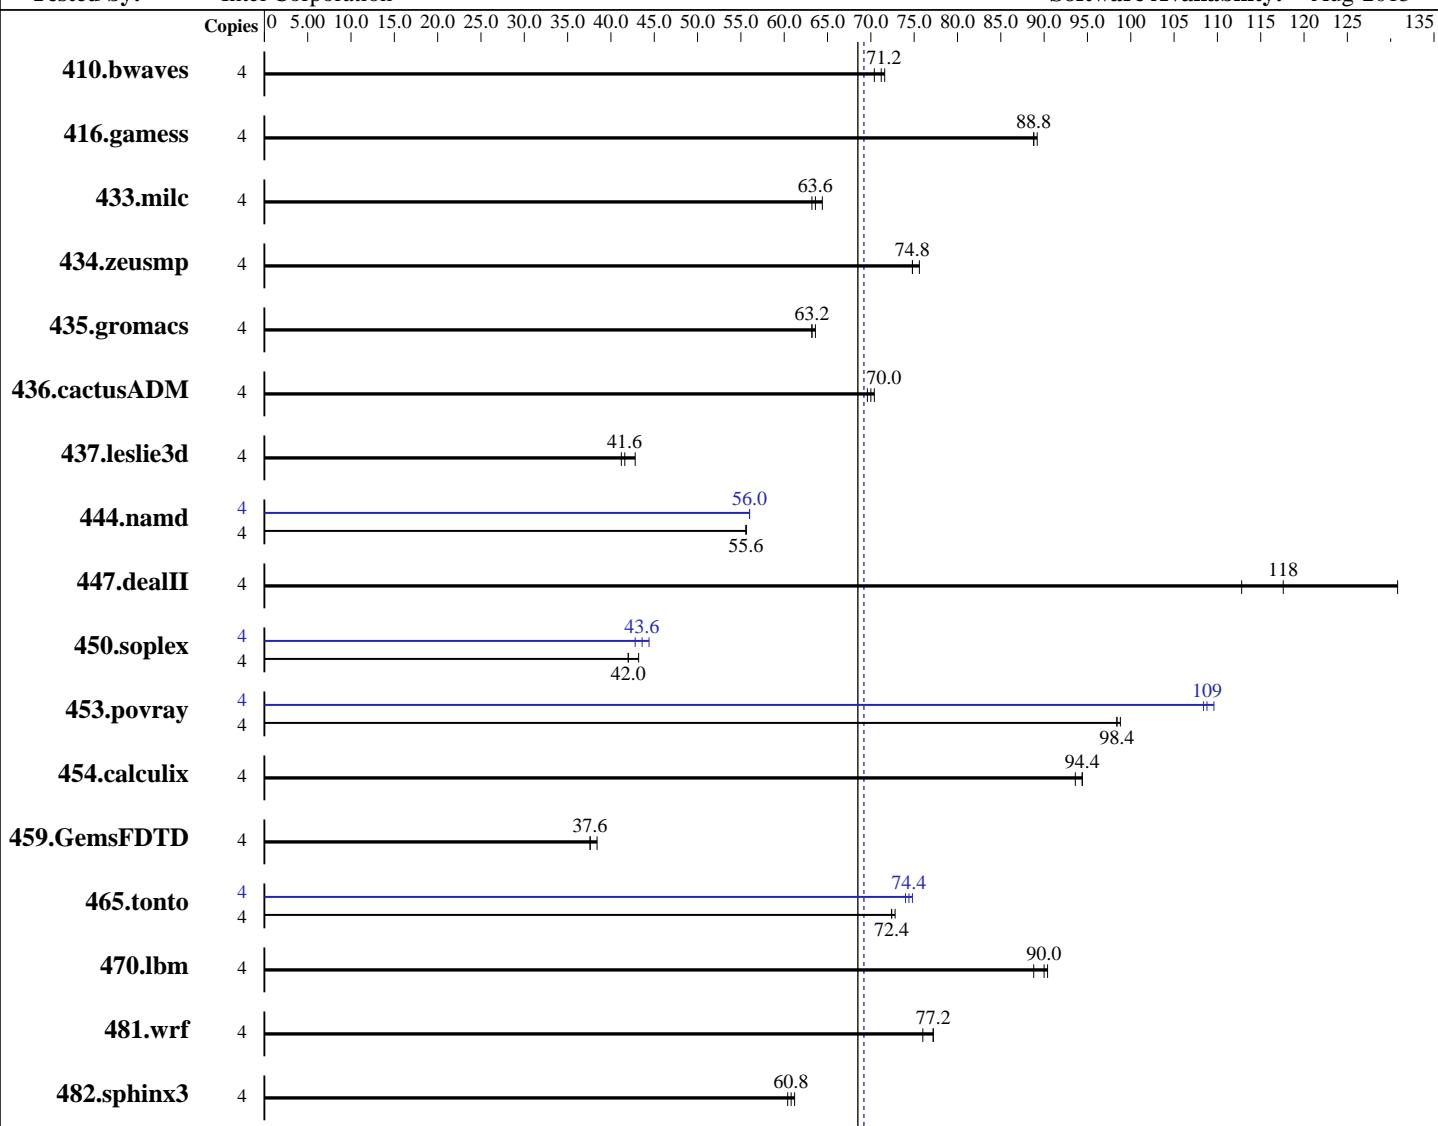

SPECfp_rate_base2006 = 68.5

SPECfp_rate2006 = 69.2

Hardware

CPU Name: AMD A8-8650
 CPU Characteristics: AMD Turbo CORE technology up to 3.80 GHz
 CPU MHz: 3200
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 192 KB I on chip per chip, 96 KB I shared / 2 cores; 16 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip, 2 MB shared / 2 cores

Software

Operating System: Microsoft Windows 7 Ultimate 6.1.7601 Service Pack 1 Build 7601
 Compiler: C/C++: Version 16.0.0.110 of Intel C++ Studio XE for Windows;
 Fortran: Version 16.0.0.110 of Intel Fortran Studio XE for Windows;
 Libraries: Version 18.00.30723 of Microsoft Visual Studio 2013
 Auto Parallel: No

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A8-8650 with
Radeon R7 Graphics)

SPECfp_rate2006 = 69.2

SPECfp_rate_base2006 = 68.5

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2016

Hardware Availability: Dec-2015

Software Availability: Aug-2015

L3 Cache: None
Other Cache: None
Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600U-11)
Disk Subsystem: Seagate Barracuda 250 GB SATA, 7200 RPM
Other Hardware: None

File System: NTFS
System State: Default
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: SmartHeap Library Version 11.0 from
<http://www.microquill.com/>

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	771	70.4	761	71.6	763	71.2	4	771	70.4	761	71.6	763	71.2
416.gamess	4	881	88.8	878	89.2	881	88.8	4	881	88.8	878	89.2	881	88.8
433.milc	4	580	63.2	578	63.6	569	64.4	4	580	63.2	578	63.6	569	64.4
434.zeusmp	4	481	75.6	487	74.8	486	74.8	4	481	75.6	487	74.8	486	74.8
435.gromacs	4	452	63.2	452	63.2	450	63.6	4	452	63.2	452	63.2	450	63.6
436.cactusADM	4	678	70.4	684	70.0	686	69.6	4	678	70.4	684	70.0	686	69.6
437.leslie3d	4	880	42.8	907	41.6	912	41.2	4	880	42.8	907	41.6	912	41.2
444.namd	4	577	55.6	577	55.6	578	55.6	4	574	56.0	572	56.0	573	56.0
447.dealII	4	406	113	389	118	350	131	4	406	113	389	118	350	131
450.soplex	4	775	43.2	792	42.0	795	42.0	4	778	42.8	753	44.4	765	43.6
453.povray	4	217	98.4	217	98.4	215	98.8	4	196	108	196	109	194	110
454.calculix	4	350	94.4	350	94.4	352	93.6	4	350	94.4	350	94.4	352	93.6
459.GemsFDTD	4	1106	38.4	1130	37.6	1132	37.6	4	1106	38.4	1130	37.6	1132	37.6
465.tonto	4	543	72.4	541	72.8	543	72.4	4	528	74.4	532	74.0	526	74.8
470.lbm	4	611	90.0	609	90.4	618	88.8	4	611	90.0	609	90.4	618	88.8
481.wrf	4	578	77.2	580	77.2	589	76.0	4	578	77.2	580	77.2	589	76.0
482.sphinx3	4	1275	61.2	1281	60.8	1293	60.4	4	1275	61.2	1281	60.8	1293	60.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 16.0 was set up to generate 64-bit binaries with the command:

"psxevars.bat intel64" (shortcut provided in the Intel(r) Parallel Studio XE 2016 program folder)

Platform Notes

Sysinfo program C:\SPEC16.0\Docs\sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\\$ \8787f7622badcf24e01c368b1db4377c
running on CltE03F49ACBFDE Fri May 27 08:26:38 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A8-8650 with
Radeon R7 Graphics)

SPECfp_rate2006 = 69.2

SPECfp_rate_base2006 = 68.5

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2016

Hardware Availability: Dec-2015

Software Availability: Aug-2015

Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
Trying 'systeminfo'
OS Name      : Microsoft Windows 7 Ultimate
OS Version   : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: System manufacturer
System Model  : System Product Name
Processor(s)  : 1 Processor(s) Installed.
                 [01]: AMD64 Family 21 Model 56 Stepping 1 AuthenticAMD ~3200 Mhz
BIOS Version  : American Megatrends Inc. 2502, 12/11/2015
Total Physical Memory: 7,108 MB
```

```
Trying 'wmic cpu get /value'
DeviceID     : CPU0
L2CacheSize  : 25359
L3CacheSize  : 0
MaxClockSpeed: 3200
Name         : AMD A8-8650 Radeon R7, 10 Compute Cores 4C+6G
NumberOfCores: 2
NumberOfLogicalProcessors: 4
```

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

450.soplex (peak): "getline_test" src.alt was used.

447.dealII (base): "max_prototype" src.alt was used.
447.dealII (base): "cxxl1_make_pair" src.alt was used.

450.soplex (base): "getline_test" src.alt was used.

447.dealII (base): "max_prototype" src.alt was used.
447.dealII (base): "cxxl1_make_pair" src.alt was used.

Binaries compiled on a system with 1x Intel Xeon E5-2699 v3 CPU
+ 64GB memory using Windows 8.1 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

icl -Qvc12 -Qstd=c99

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A8-8650 with
Radeon R7 Graphics)

SPECfp_rate2006 = 69.2

SPECfp_rate_base2006 = 68.5

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2016

Hardware Availability: Dec-2015

Software Availability: Aug-2015

Base Compiler Invocation (Continued)

C++ benchmarks:

```
icl -Qvc12
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icl -Qvc12 -Qstd=c99 ifort
```

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_P64
416.games: -DSPEC_CPU_P64
    433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 /names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
    444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
    -DSPEC_CPU_BOOST_CONFIG_MSC_VER -DSPEC_NEED_ALGORITHM
450.soplex: -DSPEC_CPU_P64 -DSPEC_GETLINE_TEST
453.povray: -DSPEC_CPU_P64
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER /names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
    470.lbm: -DSPEC_CPU_P64
        481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

```

Base Optimization Flags

C benchmarks:

```
/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F10000000000 -link /FORCE:MULTIPLE
```

C++ benchmarks:

```
/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F10000000000 shlw64M.lib
    -link /FORCE:MULTIPLE
```

Fortran benchmarks:

```
/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F10000000000 -link /FORCE:MULTIPLE
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A8-8650 with
Radeon R7 Graphics)

SPECfp_rate2006 = 69.2

SPECfp_rate_base2006 = 68.5

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2016

Hardware Availability: Dec-2015

Software Availability: Aug-2015

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE
```

Peak Compiler Invocation

C benchmarks:

```
icl -Qvc12 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc12
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icl -Qvc12 -Qstd=c99 ifort
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

```
444.namd: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)  
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000  
shlw64M.lib -link /FORCE:MULTIPLE
```

```
447.dealII: basepeak = yes
```

```
450.soplex: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)  
-Qipo -O3 -Qauto-ilp32 /F1000000000 shlw64M.lib  
-link /FORCE:MULTIPLE
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A8-8650 with
Radeon R7 Graphics)

SPECfp_rate2006 = 69.2

SPECfp_rate_base2006 = 68.5

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2016

Hardware Availability: Dec-2015

Software Availability: Aug-2015

Peak Optimization Flags (Continued)

```
453.povray: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
             -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32
             /F100000000000 shlw64M.lib           -link /FORCE:MULTIPLE
```

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

```
465.tonto: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
             -Qipo -O3 -Qprec-div- -Qunroll14 -Qauto /F100000000000
             -link /FORCE:MULTIPLE
```

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Sep 20 15:06:39 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 September 2016.