



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]_rate2006 = Not Run

PowerEdge R730 (Intel Xeon E5-2683 v4, 2.10 GHz)

SPECfp_rate_base2006 = 935

CPU2006 license: 55


Test date: Aug-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

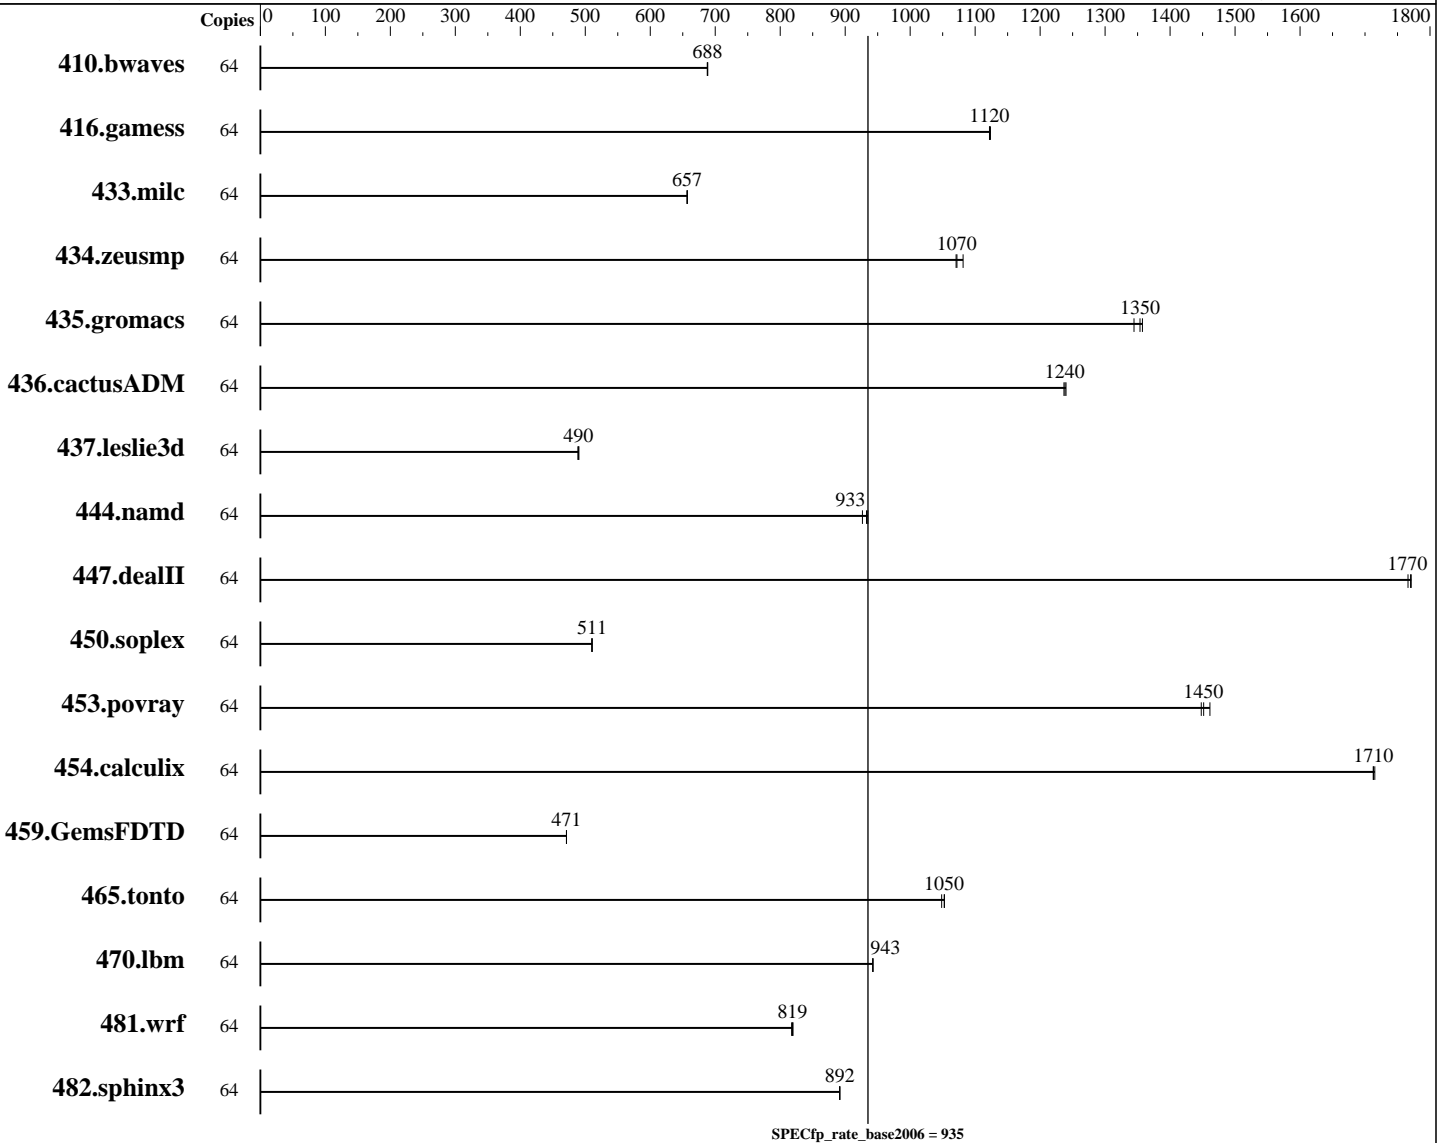

Hardware

CPU Name: Intel Xeon E5-2683 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 3.10.0-327.el7.x86_64
 Compiler: C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.2.181 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = Not Run

PowerEdge R730 (Intel Xeon E5-2683 v4, 2.10 GHz)

SPECfp_rate_base2006 = 935

CPU2006 license: 55

Test date: Aug-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

L3 Cache: 40 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx8 PC4-2400T-R)
 Disk Subsystem: 200 GB SATA SSD
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1265	688	1263	688	1264	688							
416.gamess	64	1115	1120	1117	1120	1117	1120							
433.milc	64	895	657	894	657	895	657							
434.zeusmp	64	543	1070	544	1070	539	1080							
435.gromacs	64	338	1350	337	1360	340	1340							
436.cactusADM	64	618	1240	617	1240	618	1240							
437.leslie3d	64	1228	490	1231	489	1228	490							
444.namd	64	549	935	550	933	554	927							
447.dealII	64	414	1770	415	1770	413	1770							
450.soplex	64	1045	511	1045	511	1047	510							
453.povray	64	235	1450	233	1460	235	1450							
454.calculix	64	308	1710	308	1720	308	1710							
459.GemsFDTD	64	1442	471	1441	471	1442	471							
465.tonto	64	598	1050	598	1050	601	1050							
470.lbm	64	933	943	933	943	933	943							
481.wrf	64	873	819	872	820	874	818							
482.sphinx3	64	1400	891	1399	892	1399	892							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
Snoop Mode set to Cluster on Die
Virtualization Technology disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = Not Run

PowerEdge R730 (Intel Xeon E5-2683 v4, 2.10 GHz)

SPECfp_rate_base2006 = 935

CPU2006 license: 55

Test date: Aug-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

Platform Notes (Continued)

System Profile set to custom
 CPU Performance set to Hardware P States
 C States set to Autonomous
 C1E disabled
 Energy Efficient Turbo disabled
 Uncore Frequency set to Dynamic
 Energy Efficiency Policy set to Balanced Performance
 Memory Patrol Scrub disabled
 Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
 \$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
 running on localhost.localdomain Mon Aug 15 07:08:10 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2683 v4 @ 2.10GHz
 2 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores    : 16
  siblings    : 32
  physical 0   : cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 1   : cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size     : 20480 KB
```

```
From /proc/meminfo
MemTotal:      264040056 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29
EDT 2015 x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = Not Run

PowerEdge R730 (Intel Xeon E5-2683 v4, 2.10 GHz)

SPECfp_rate_base2006 = 935

CPU2006 license: 55

Test date: Aug-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

Platform Notes (Continued)

run-level 3 Aug 15 05:40

SPEC is set to: /root/cpu2006-1.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfs	179G	8.4G	170G	5%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.1.7 06/16/2016

Memory:

15x	00AD063200AD	HMA82GR7MFR8N-UH	16 GB	2 rank	2400 MHz
1x	00CE00B300CE	M393A2K43BB1-CRC	16 GB	2 rank	2400 MHz
8x	Not Specified	Not Specified			

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

The Dell PowerEdge R730 and the PowerEdge R730xd models are electronically equivalent.

The results have been measured on a Dell PowerEdge R730xd model.

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB memory using RedHat EL 7.2 glibc 2.17

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = Not Run

PowerEdge R730 (Intel Xeon E5-2683 v4, 2.10 GHz)

SPECfp_rate_base2006 = 935

CPU2006 license: 55

Test date: Aug-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = Not Run

PowerEdge R730 (Intel Xeon E5-2683 v4, 2.10 GHz)

SPECfp_rate_base2006 = 935

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Aug-2016

Hardware Availability: Jun-2016

Software Availability: Mar-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Fri Nov 11 16:34:22 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 November 2016.