



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp[®]_rate2006 = 1710

Huawei CH242 V3 (Intel Xeon E7-8891 v4)

SPECfp_rate_base2006 = 1670

CPU2006 license: 3175


Test date: Dec-2016

Test sponsor: Huawei

Hardware Availability: Jun-2016

Tested by: Huawei

Software Availability: Nov-2015

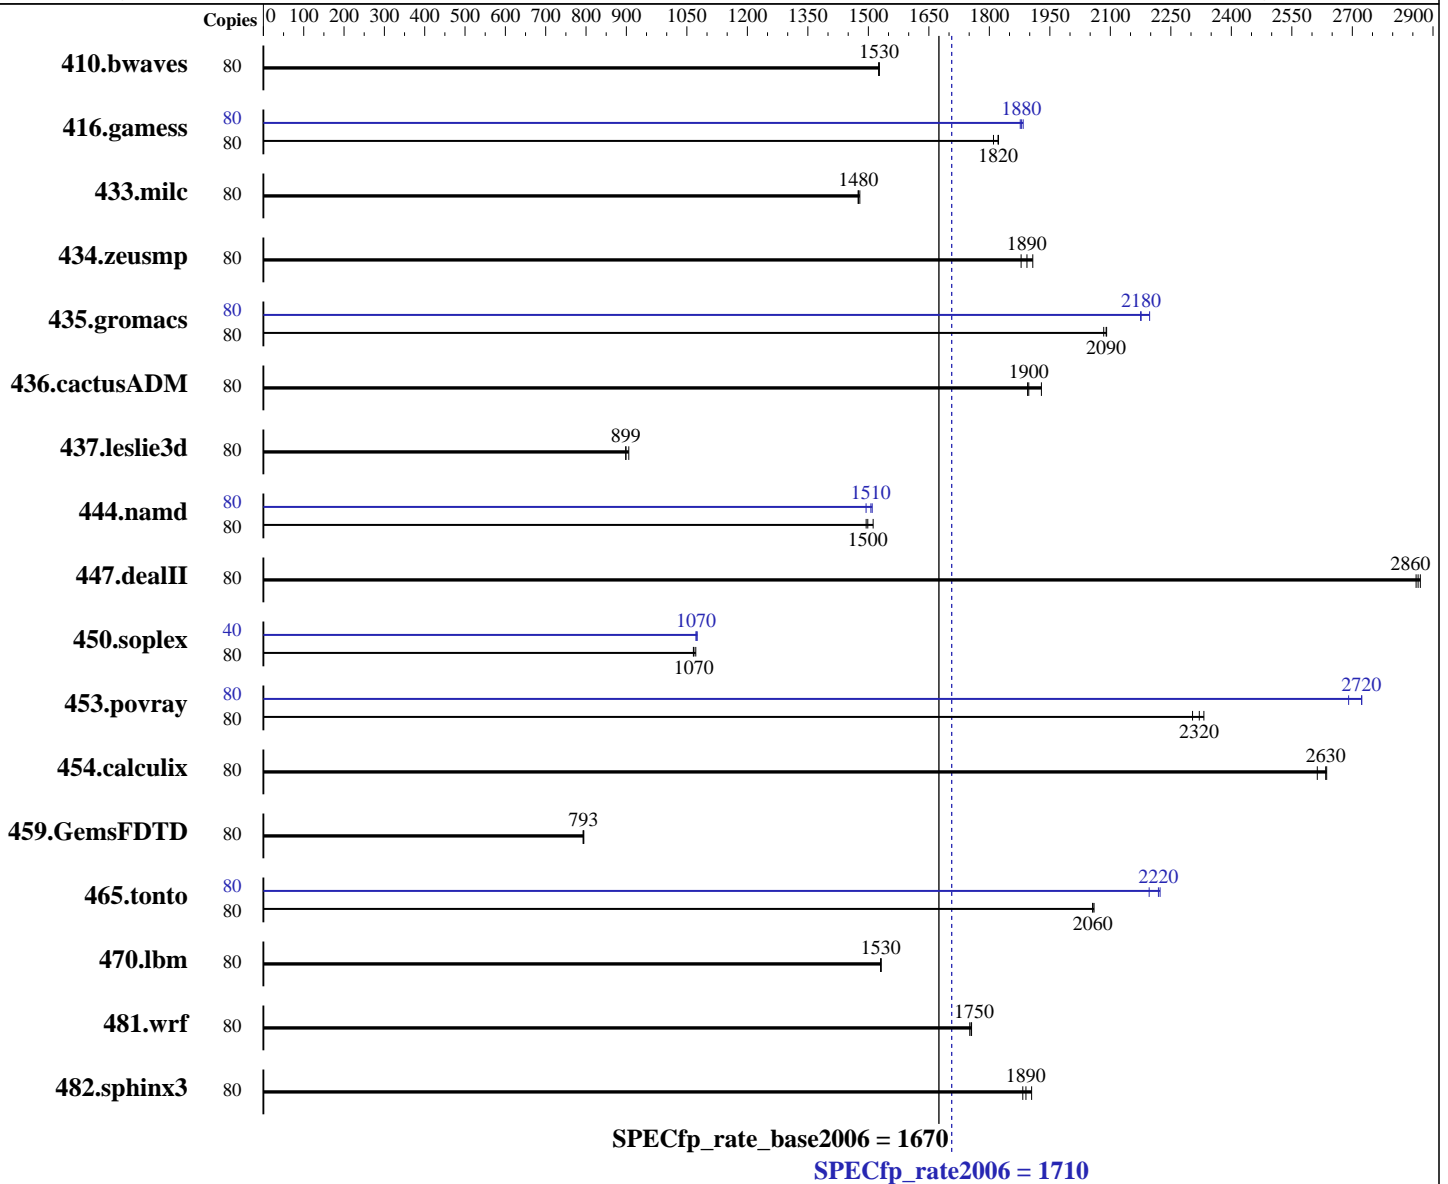

Hardware

CPU Name: Intel Xeon E7-8891 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 3.10.0-327.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1710

Huawei CH242 V3 (Intel Xeon E7-8891 v4)

SPECfp_rate_base2006 = 1670

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Jun-2016

Software Availability: Nov-2015

L3 Cache: 60 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (32 x 16 GB 2Rx8 PC4-2400T-R, running at 1600 MHz)
 Disk Subsystem: 1 x 480 GB SSD
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	80	713	1530	712	1530	<u>712</u>	<u>1530</u>	80	713	1530	712	1530	<u>712</u>	<u>1530</u>
416.gamess	80	865	1810	859	1820	<u>860</u>	<u>1820</u>	80	835	1880	831	1880	<u>833</u>	<u>1880</u>
433.milc	80	498	1470	497	1480	<u>498</u>	<u>1480</u>	80	498	1470	497	1480	<u>498</u>	<u>1480</u>
434.zeusmp	80	382	1910	<u>385</u>	<u>1890</u>	387	1880	80	382	1910	<u>385</u>	<u>1890</u>	387	1880
435.gromacs	80	<u>273</u>	<u>2090</u>	273	2090	274	2080	80	260	2200	<u>262</u>	<u>2180</u>	263	2170
436.cactusADM	80	<u>504</u>	<u>1900</u>	496	1930	505	1890	80	<u>504</u>	<u>1900</u>	496	1930	505	1890
437.leslie3d	80	<u>837</u>	<u>899</u>	837	898	830	906	80	<u>837</u>	<u>899</u>	837	898	830	906
444.namd	80	424	1510	<u>428</u>	<u>1500</u>	429	1490	80	429	1490	<u>426</u>	<u>1510</u>	425	1510
447.dealII	80	319	2870	320	2860	<u>320</u>	<u>2860</u>	80	319	2870	320	2860	<u>320</u>	<u>2860</u>
450.soplex	80	<u>625</u>	<u>1070</u>	622	1070	626	1070	40	311	1070	310	1080	<u>311</u>	<u>1070</u>
453.povray	80	183	2330	185	2300	<u>183</u>	<u>2320</u>	80	156	2720	158	2690	<u>156</u>	<u>2720</u>
454.calculix	80	<u>251</u>	<u>2630</u>	250	2640	253	2610	80	<u>251</u>	<u>2630</u>	250	2640	253	2610
459.GemsFDTD	80	<u>1070</u>	<u>793</u>	1068	795	1071	793	80	<u>1070</u>	<u>793</u>	1068	795	1071	793
465.tonto	80	382	2060	383	2060	<u>383</u>	<u>2060</u>	80	<u>355</u>	<u>2220</u>	354	2220	358	2200
470.lbm	80	<u>718</u>	<u>1530</u>	718	1530	718	1530	80	<u>718</u>	<u>1530</u>	718	1530	718	1530
481.wrf	80	510	1750	509	1760	<u>509</u>	<u>1750</u>	80	510	1750	509	1760	<u>509</u>	<u>1750</u>
482.sphinx3	80	<u>825</u>	<u>1890</u>	819	1900	828	1880	80	<u>825</u>	<u>1890</u>	819	1900	828	1880

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1710

Huawei CH242 V3 (Intel Xeon E7-8891 v4)

SPECfp_rate_base2006 = 1670

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Jun-2016

Software Availability: Nov-2015

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Set Lock_step to disabled

Baseboard Management Controller used to adjust the fan speed to 100%

Set C-State to C0/C1

Set COD Mode to enabled

Sysinfo program /spec16/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on localhost.localdomain Wed Dec 7 14:49:04 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7-8891 v4 @ 2.80GHz

4 "physical id"s (chips)

80 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 10

siblings : 20

physical 0: cores 5 9 10 11 13 18 24 26 28 29

physical 1: cores 5 9 10 11 13 18 24 26 28 29

physical 2: cores 5 9 10 11 13 18 24 26 28 29

physical 3: cores 5 9 10 11 13 18 24 26 28 29

cache size : 61440 KB

From /proc/meminfo

MemTotal: 528077220 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux Server"

VERSION="7.2 (Maipo)"

ID="rhel"

ID_LIKE="fedora"

VERSION_ID="7.2"

PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"

ANSI_COLOR="0;31"

CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"

redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

uname -a:

Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29

EDT 2015 x86_64 x86_64 x86_64 GNU/Linux

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 3



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1710

Huawei CH242 V3 (Intel Xeon E7-8891 v4)

SPECfp_rate_base2006 = 1670

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Jun-2016

Software Availability: Nov-2015

Platform Notes (Continued)

run-level 3 Dec 7 05:48

SPEC is set to: /spec16

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdal	ext4	407G	83G	304G	22%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. BLISV788 11/07/2016

Memory:

32x Hynix HMA82GR7AFR8N-UH 16 GB 2 rank 2400 MHz, configured at 1600 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/spec16/libs/32:/spec16/libs/64:/spec16/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1710

Huawei CH242 V3 (Intel Xeon E7-8891 v4)

SPECfp_rate_base2006 = 1670

CPU2006 license: 3175

Test date: Dec-2016

Test sponsor: Huawei

Hardware Availability: Jun-2016

Tested by: Huawei

Software Availability: Nov-2015

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1710

Huawei CH242 V3 (Intel Xeon E7-8891 v4)

SPECfp_rate_base2006 = 1670

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Jun-2016

Software Availability: Nov-2015

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -D_FILE_OFFSET_BITS=64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1710

Huawei CH242 V3 (Intel Xeon E7-8891 v4)

SPECfp_rate_base2006 = 1670

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Jun-2016

Software Availability: Nov-2015

Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1710

Huawei CH242 V3 (Intel Xeon E7-8891 v4)

SPECfp_rate_base2006 = 1670

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Jun-2016

Software Availability: Nov-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Dec 28 10:52:25 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 December 2016.