



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

**SPECfp®\_rate2006 = 1730**

Huawei CH121 V5 (Intel Xeon Platinum 8168)

**SPECfp\_rate\_base2006 = 1700**

CPU2006 license: 3175


Test date: Jun-2017

Test sponsor: Huawei

Hardware Availability: Aug-2017

Tested by: Huawei

Software Availability: Nov-2016

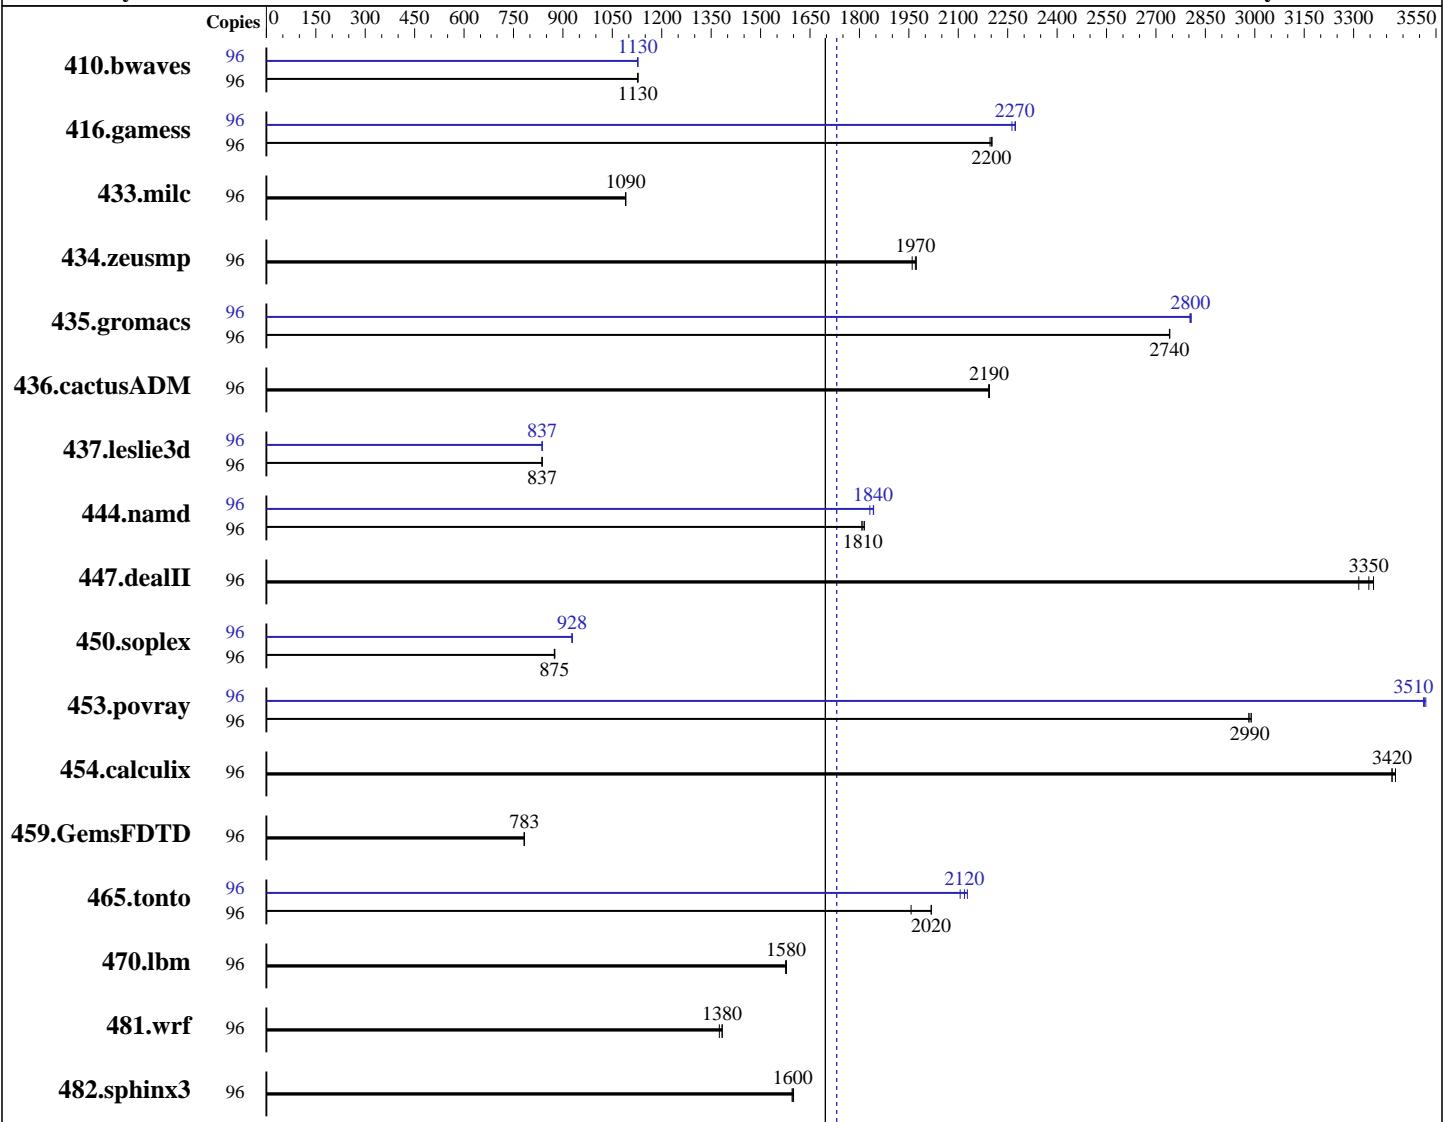

## Hardware

CPU Name: Intel Xeon Platinum 8168  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 48 cores, 2 chips, 24 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

## Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
 Compiler: 3.10.0-514.el7.x86\_64  
 C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux  
 Auto Parallel: No  
 File System: xfs

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Huawei**

**SPECfp\_rate2006 = 1730**

**Huawei CH121 V5 (Intel Xeon Platinum 8168)**

**SPECfp\_rate\_base2006 = 1700**

**CPU2006 license:** 3175

**Test date:** Jun-2017

**Test sponsor:** Huawei

**Hardware Availability:** Aug-2017

**Tested by:** Huawei

**Software Availability:** Nov-2016

L3 Cache: 33 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)  
 Disk Subsystem: 1 x 1200 GB SAS, 10000 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	96	<u>1157</u>	<u>1130</u>	1158	1130	1157	1130	96	1158	1130	<u>1157</u>	<u>1130</u>	1157	1130
416.gamess	96	856	2200	<u>854</u>	<u>2200</u>	853	2200	96	827	2270	<u>827</u>	<u>2270</u>	831	2260
433.milc	96	808	1090	808	1090	<u>808</u>	<u>1090</u>	96	808	1090	808	1090	<u>808</u>	<u>1090</u>
434.zeusmp	96	<u>444</u>	<u>1970</u>	443	1970	446	1960	96	<u>444</u>	<u>1970</u>	443	1970	446	1960
435.gromacs	96	250	2740	250	2740	<u>250</u>	<u>2740</u>	96	245	2800	<u>244</u>	<u>2800</u>	244	2810
436.cactusADM	96	523	2190	<u>523</u>	<u>2190</u>	523	2190	96	523	2190	<u>523</u>	<u>2190</u>	523	2190
437.leslie3d	96	1078	837	<u>1078</u>	<u>837</u>	1079	837	96	1079	837	1077	838	<u>1078</u>	<u>837</u>
444.namd	96	<u>425</u>	<u>1810</u>	426	1810	424	1820	96	<u>418</u>	<u>1840</u>	418	1840	420	1830
447.dealII	96	<u>328</u>	<u>3350</u>	327	3360	331	3320	96	<u>328</u>	<u>3350</u>	327	3360	331	3320
450.soplex	96	916	874	<u>915</u>	<u>875</u>	915	875	96	862	929	<u>863</u>	<u>928</u>	863	927
453.povray	96	<u>171</u>	<u>2990</u>	171	2980	171	2990	96	145	3520	145	3510	<u>145</u>	<u>3510</u>
454.calculix	96	232	3420	<u>232</u>	<u>3420</u>	231	3430	96	232	3420	<u>232</u>	<u>3420</u>	231	3430
459.GemsFDTD	96	1302	782	1301	783	<u>1301</u>	<u>783</u>	96	1302	782	1301	783	<u>1301</u>	<u>783</u>
465.tonto	96	483	1960	468	2020	<u>468</u>	<u>2020</u>	96	449	2110	<u>446</u>	<u>2120</u>	444	2130
470.lbm	96	<u>836</u>	<u>1580</u>	837	1580	836	1580	96	<u>836</u>	<u>1580</u>	837	1580	836	1580
481.wrf	96	775	1380	780	1370	<u>775</u>	<u>1380</u>	96	775	1380	780	1370	<u>775</u>	<u>1380</u>
482.sphinx3	96	<u>1171</u>	<u>1600</u>	1173	1600	1169	1600	96	<u>1171</u>	<u>1600</u>	1173	1600	1169	1600

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
 Set Power Efficiency Mode to Performance  
 Set SNC to Enable

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = 1730**

Huawei CH121 V5 (Intel Xeon Platinum 8168)

**SPECfp\_rate\_base2006 = 1700**

CPU2006 license: 3175

Test date: Jun-2017

Test sponsor: Huawei

Hardware Availability: Aug-2017

Tested by: Huawei

Software Availability: Nov-2016

## Platform Notes (Continued)

```
Set IMC Interleaving to 1 way
Set Patrol Scrub to Disable
Sysinfo program /spec17/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on localhost.localdomain Fri Jun 23 12:50:11 2017
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8168 CPU @ 2.70GHz
        2 "physical id"s (chips)
        96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 24
        siblings : 48
        physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
        27 28 29
        physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
        27 28 29
        cache size : 33792 KB
```

```
From /proc/meminfo
MemTotal:      394144692 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.3 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.3"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

uname -a:
Linux localhost.localdomain 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13
EDT 2016 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jun 20 14:48

SPEC is set to: /spec17
Filesystem Type Size Used Avail Use% Mounted on
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

Huawei CH121 V5 (Intel Xeon Platinum 8168)

**SPECfp\_rate2006 = 1730**

CPU2006 license: 3175

Test date: Jun-2017

Test sponsor: Huawei

Hardware Availability: Aug-2017

Tested by: Huawei

Software Availability: Nov-2016

## Platform Notes (Continued)

/dev/sda2 xfs 262G 85G 177G 33% /  
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 0.10 02/14/2017  
Memory:  
24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec17/libs/32:/spec17/libs/64:/spec17/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

Huawei CH121 V5 (Intel Xeon Platinum 8168)

**SPECfp\_rate2006 = 1730**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

## Base Portability Flags (Continued)

```
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

Huawei CH121 V5 (Intel Xeon Platinum 8168)

**SPECfp\_rate2006 = 1730**

CPU2006 license: 3175

Test date: Jun-2017

Test sponsor: Huawei

Hardware Availability: Aug-2017

Tested by: Huawei

Software Availability: Nov-2016

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
  434.zeusmp: -DSPEC_CPU_LP64
  435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
  450.soplex: -D_FILE_OFFSET_BITS=64
  453.povray: -DSPEC_CPU_LP64
  454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```
444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
  -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
  -no-prec-div(pass 2) -fno-alias -auto-ilp32
  -qopt-mem-layout-trans=3
```

447.dealII: basepeak = yes

```
450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
  -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
  -no-prec-div(pass 2) -qopt-malloc-options=3
  -qopt-mem-layout-trans=3
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

Huawei CH121 V5 (Intel Xeon Platinum 8168)

SPECfp\_rate2006 = 1730

SPECfp\_rate\_base2006 = 1700

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

## Peak Optimization Flags (Continued)

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll14 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: basepeak = yes

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll14 -auto -inline-calloc  
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-SKL-V1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-SKL-V1.6.xml>



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

Huawei CH121 V5 (Intel Xeon Platinum 8168)

**SPECfp\_rate2006 = 1730**

**SPECfp\_rate\_base2006 = 1700**

**CPU2006 license:** 3175

**Test sponsor:** Huawei

**Tested by:** Huawei

**Test date:** Jun-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Nov-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jul 25 15:51:19 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 July 2017.