



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge C6420 (Intel Xeon Platinum 8164, 2.00 GHz)

SPECfp<sup>®</sup>\_rate2006 = 1580

SPECfp\_rate\_base2006 = 1540

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jun-2017

Hardware Availability: Jul-2017

Software Availability: Jul-2017

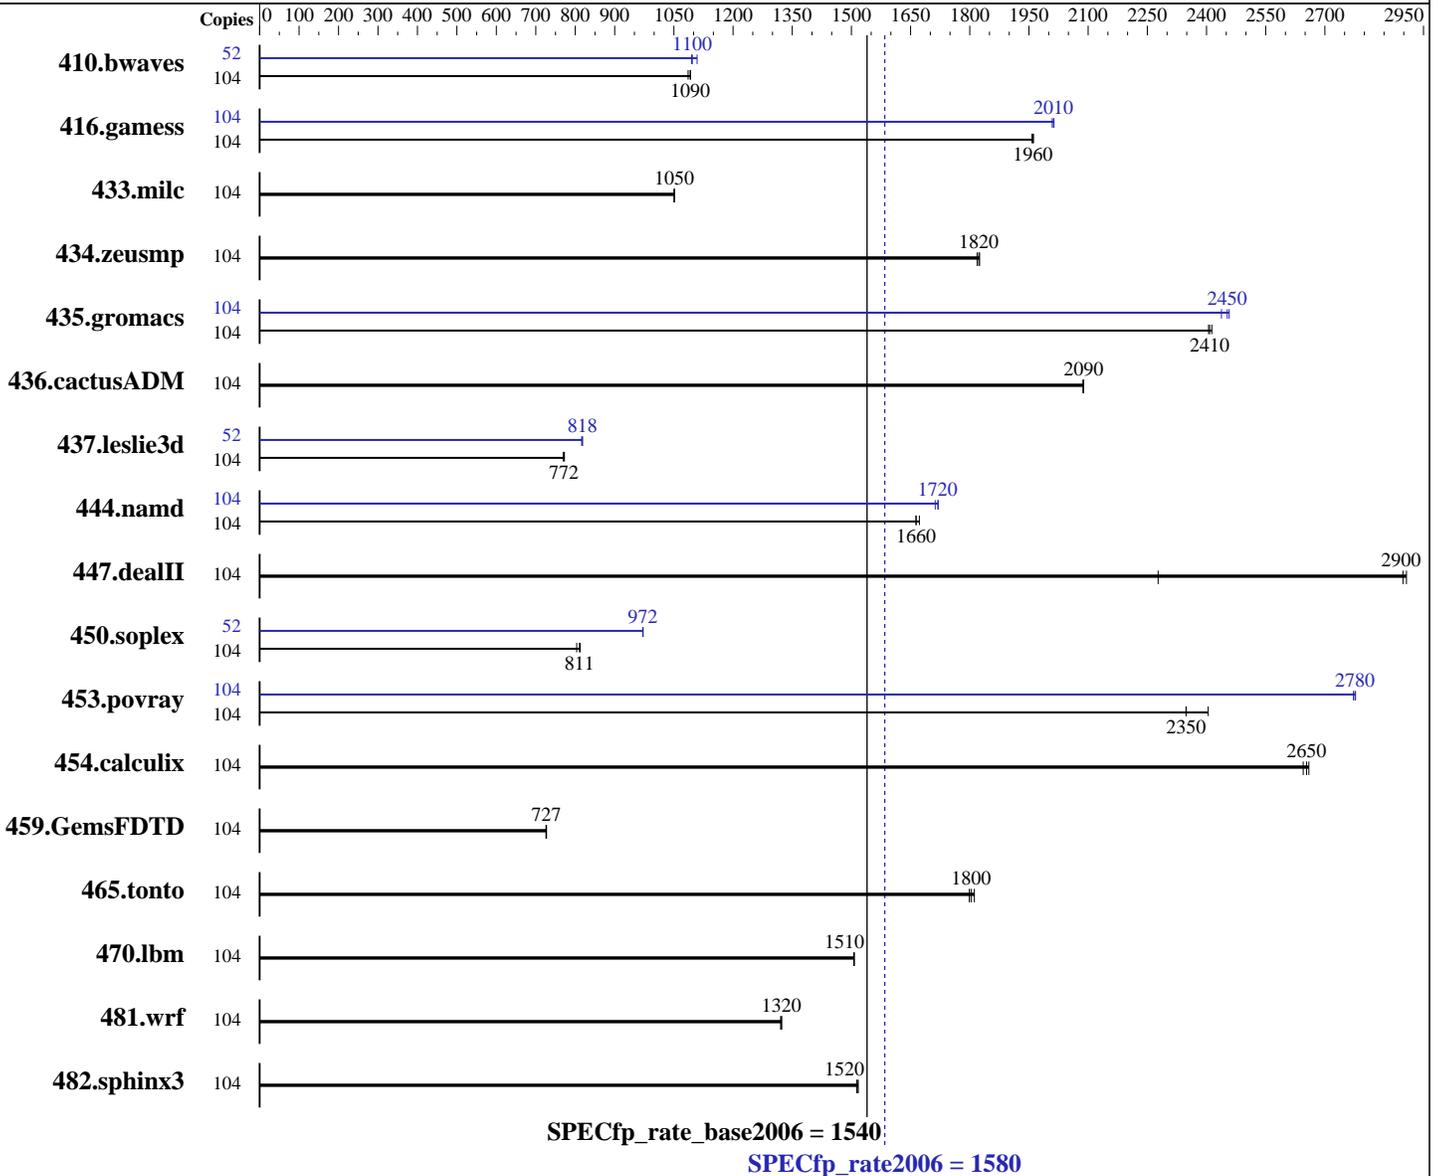

### Hardware

CPU Name: Intel Xeon Platinum 8164  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 52 cores, 2 chips, 26 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
 Auto Parallel: Yes  
 File System: btrfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge C6420 (Intel Xeon Platinum 8164, 2.00 GHz)

SPECfp\_rate2006 = 1580

SPECfp\_rate\_base2006 = 1540

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jun-2017

Hardware Availability: Jul-2017

Software Availability: Jul-2017

L3 Cache: 35.75 MB I+D on chip per chip  
Other Cache: None  
Memory: 384 GB (12 x 32 GB 2Rx8 PC4-2666V-R)  
Disk Subsystem: 1 x 960 GB SATA SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	104	<u>1295</u>	<u>1090</u>	1301	1090	1294	1090	52	<u>644</u>	<u>1100</u>	645	1090	637	1110
416.gamess	104	1038	1960	1040	1960	<u>1039</u>	<u>1960</u>	104	<u>1012</u>	<u>2010</u>	1011	2010	1014	2010
433.milc	104	<u>908</u>	<u>1050</u>	909	1050	908	1050	104	<u>908</u>	<u>1050</u>	909	1050	908	1050
434.zeusmp	104	520	1820	<u>519</u>	<u>1820</u>	519	1820	104	520	1820	<u>519</u>	<u>1820</u>	519	1820
435.gromacs	104	308	2410	<u>308</u>	<u>2410</u>	309	2410	104	<u>303</u>	<u>2450</u>	302	2460	305	2440
436.cactusADM	104	596	2090	<u>595</u>	<u>2090</u>	595	2090	104	596	2090	<u>595</u>	<u>2090</u>	595	2090
437.leslie3d	104	<u>1267</u>	<u>772</u>	1265	773	1270	769	52	599	816	<u>597</u>	<u>818</u>	597	818
444.namd	104	<u>501</u>	<u>1660</u>	501	1660	499	1670	104	487	1710	485	1720	<u>485</u>	<u>1720</u>
447.dealII	104	522	2280	409	2910	<u>411</u>	<u>2900</u>	104	522	2280	409	2910	<u>411</u>	<u>2900</u>
450.soplex	104	1079	804	<u>1070</u>	<u>811</u>	1067	813	52	<u>446</u>	<u>972</u>	447	971	446	972
453.povray	104	<u>236</u>	<u>2350</u>	236	2350	230	2400	104	<u>199</u>	<u>2780</u>	200	2770	199	2780
454.calculix	104	324	2650	<u>323</u>	<u>2650</u>	323	2660	104	324	2650	<u>323</u>	<u>2650</u>	323	2660
459.GemsFDTD	104	1520	726	<u>1518</u>	<u>727</u>	1518	727	104	1520	726	<u>1518</u>	<u>727</u>	1518	727
465.tonto	104	565	1810	569	1800	<u>568</u>	<u>1800</u>	104	565	1810	569	1800	<u>568</u>	<u>1800</u>
470.lbm	104	948	1510	949	1510	<u>948</u>	<u>1510</u>	104	948	1510	949	1510	<u>948</u>	<u>1510</u>
481.wrf	104	<u>878</u>	<u>1320</u>	880	1320	878	1320	104	<u>878</u>	<u>1320</u>	880	1320	878	1320
482.sphinx3	104	<u>1338</u>	<u>1520</u>	1336	1520	1339	1510	104	<u>1338</u>	<u>1520</u>	1336	1520	1339	1510

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
Sub NUMA Cluster enabled  
Virtualization Technology disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp\_rate2006 = 1580**

PowerEdge C6420 (Intel Xeon Platinum 8164, 2.00 GHz)

**SPECfp\_rate\_base2006 = 1540**

**CPU2006 license:** 55

**Test date:** Jun-2017

**Test sponsor:** Dell Inc.

**Hardware Availability:** Jul-2017

**Tested by:** Dell Inc.

**Software Availability:** Jul-2017

## Platform Notes (Continued)

System Profile set to Custom  
 CPU Performance set to Maximum Performance  
 C States set to autonomous  
 C1E disabled  
 Energy Efficient Turbo disabled  
 Uncore Frequency set to Dynamic  
 Energy Efficiency Policy set to Performance  
 Memory Patrol Scrub disabled  
 Logical Processor enabled  
 CPU Interconnect Bus Link Power Management disabled  
 PCI ASPM L1 Link Power Management disabled  
 Sysinfo program /root/cpu2006-1.2\_ic17u3/config/sysinfo.rev6993  
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
 running on linux-7lna Fri Jun 30 01:40:57 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8164 CPU @ 2.00GHz
 2 "physical id"s (chips)
 104 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 26
  siblings  : 52
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
                26 27 28 29
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
                26 27 28 29
cache size : 36608 KB
```

```
From /proc/meminfo
MemTotal:      394867844 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp\_rate2006 = 1580**

PowerEdge C6420 (Intel Xeon Platinum 8164, 2.00 GHz)

**SPECfp\_rate\_base2006 = 1540**

**CPU2006 license:** 55

**Test date:** Jun-2017

**Test sponsor:** Dell Inc.

**Hardware Availability:** Jul-2017

**Tested by:** Dell Inc.

**Software Availability:** Jul-2017

## Platform Notes (Continued)

```
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-7lna 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 29 12:29
```

```
SPEC is set to: /root/cpu2006-1.2_ic17u3
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda6       btrfs 272G  8.1G 263G   3% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.0.6 06/22/2017

Memory:

```
4x 002C00B3002C 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666 MHz
4x 002C0632002C 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666 MHz
4x 00AD063200AD HMA84GR7AFR4N-VK 32 GB 2 rank 2666 MHz
4x Not Specified Not Specified
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006-1.2_ic17u3/lib/ia32:/root/cpu2006-1.2_ic17u3/lib/intel64:/root/cpu2006-1.2_ic17u3/sh10.2"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

```
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
```

```
runspec command invoked through numactl i.e.:
```

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Platinum 8164, 2.00 GHz)

**SPECfp\_rate2006 = 1580**

**SPECfp\_rate\_base2006 = 1540**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Jun-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Jul-2017

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Platinum 8164, 2.00 GHz)

**SPECfp\_rate2006 = 1580**

**SPECfp\_rate\_base2006 = 1540**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Jun-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Jul-2017

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.deallI: -DSPEC\_CPU\_LP64  
 450.soplex: -D\_FILE\_OFFSET\_BITS=64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp\_rate2006 = 1580**

PowerEdge C6420 (Intel Xeon Platinum 8164, 2.00 GHz)

**SPECfp\_rate\_base2006 = 1540**

**CPU2006 license:** 55

**Test date:** Jun-2017

**Test sponsor:** Dell Inc.

**Hardware Availability:** Jul-2017

**Tested by:** Dell Inc.

**Software Availability:** Jul-2017

## Peak Optimization Flags (Continued)

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -fno-alias -auto-ilp32  
-qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-malloc-options=3  
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

### Fortran benchmarks:

410.bwaves: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: basepeak = yes

465.tonto: basepeak = yes

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revB.20170725.html>



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Platinum 8164, 2.00 GHz)

**SPECfp\_rate2006 = 1580**

**SPECfp\_rate\_base2006 = 1540**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Jun-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Jul-2017

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revB.20170725.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jul 25 15:53:25 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 25 July 2017.