



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint<sup>®</sup>\_rate2006 = 573

PowerEdge FC640 (Intel Xeon Gold 5122, 3.60 GHz)

SPECint\_rate\_base2006 = 544

CPU2006 license: 55


Test date: Sep-2017

Test sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Apr-2017

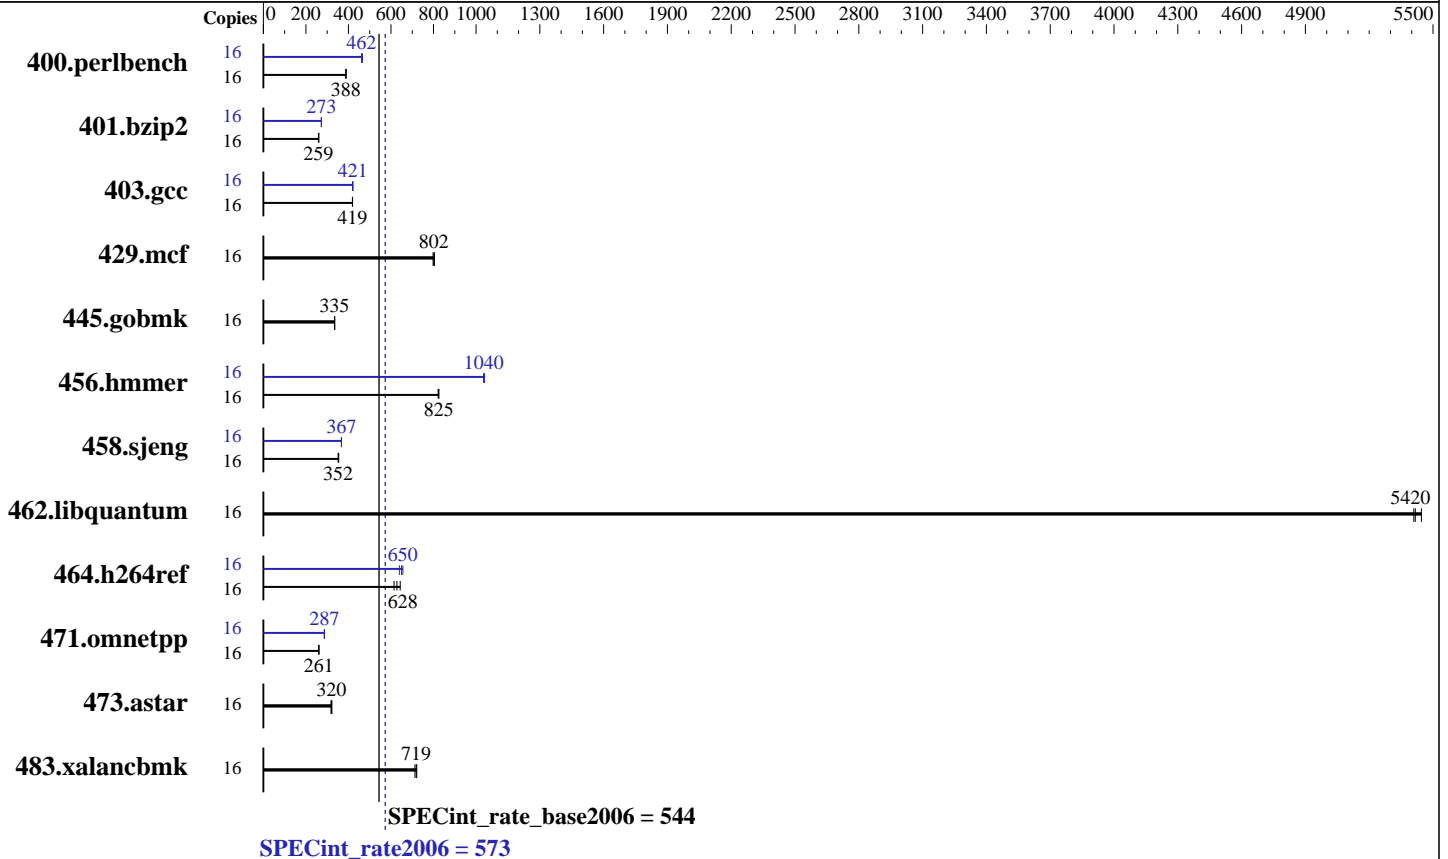

## Hardware

CPU Name: Intel Xeon Gold 5122  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 3600  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: 16.5 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2666V-R, running at 2666 MT/s)  
 Disk Subsystem: 1 x 960 GB SATA SSD  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86\_64) 4.4.16-56-default  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux  
 Auto Parallel: Yes  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 573

PowerEdge FC640 (Intel Xeon Gold 5122, 3.60 GHz)

SPECint\_rate\_base2006 = 544

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Sep-2017  
Hardware Availability: Sep-2017  
Software Availability: Apr-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	403	388	402	389	<b>403</b>	<b>388</b>	16	<b>338</b>	<b>462</b>	336	466	338	462
401.bzip2	16	596	259	<b>595</b>	<b>259</b>	591	261	16	565	273	566	273	<b>566</b>	<b>273</b>
403.gcc	16	308	419	307	419	<b>307</b>	<b>419</b>	16	306	421	<b>306</b>	<b>421</b>	307	419
429.mcf	16	181	804	<b>182</b>	<b>802</b>	183	798	16	181	804	<b>182</b>	<b>802</b>	183	798
445.gobmk	16	500	335	<b>501</b>	<b>335</b>	502	335	16	500	335	<b>501</b>	<b>335</b>	502	335
456.hammer	16	<b>181</b>	<b>825</b>	181	825	182	822	16	144	1040	144	1040	<b>144</b>	<b>1040</b>
458.sjeng	16	547	354	550	352	<b>549</b>	<b>352</b>	16	<b>527</b>	<b>367</b>	528	367	527	367
462.libquantum	16	<b>61.2</b>	<b>5420</b>	61.3	5410	60.9	5450	16	<b>61.2</b>	<b>5420</b>	61.3	5410	60.9	5450
464.h264ref	16	576	615	550	644	<b>564</b>	<b>628</b>	16	540	656	<b>545</b>	<b>650</b>	554	639
471.omnetpp	16	384	260	<b>384</b>	<b>261</b>	383	261	16	<b>348</b>	<b>287</b>	348	287	349	286
473.astar	16	348	322	<b>352</b>	<b>320</b>	353	318	16	348	322	<b>352</b>	<b>320</b>	353	318
483.xalancbmk	16	155	713	153	721	<b>154</b>	<b>719</b>	16	155	713	153	721	<b>154</b>	<b>719</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
 Sub NUMA Cluster disabled  
 Virtualization Technology disabled  
 System Profile set to Custom  
 CPU Performance set to Maximum Performance  
 C States set to Autonomous  
 C1E disabled  
 Energy Efficient Turbo disabled  
 Uncore Frequency set to Dynamic  
 Energy Efficiency Policy set to Performance  
 Memory Patrol Scrub disabled  
 Logical Processor enabled  
 CPU Interconnect Bus Link Power Management disabled  
 PCI ASPM L1 Link Power Management disabled  
 Sysinfo program /root/cpu2006-1.2\_ic17u3/config/sysinfo.rev6993  
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
 running on linux-u8yg Thu Sep 7 01:35:12 2017

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 573

PowerEdge FC640 (Intel Xeon Gold 5122, 3.60 GHz)

SPECint\_rate\_base2006 = 544

CPU2006 license: 55

Test date: Sep-2017

Test sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Apr-2017

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5122 CPU @ 3.60GHz
 2 "physical id"s (chips)
 16 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
siblings : 8
physical 0: cores 1 5 9 13
physical 1: cores 1 5 9 13
cache size : 16896 KB
```

From /proc/meminfo

```
MemTotal: 196687100 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/\*release\* /etc/\*version\*

SuSE-release:

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
```

# This file is deprecated and will be removed in a future service pack or release.  
# Please check /etc/os-release for details about this release.

os-release:

```
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

uname -a:

```
Linux linux-u8yg 4.4.16-56-default #1 SMP Mon Aug 8 14:24:26 UTC 2016
(5b281a8) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Sep 7 00:59

SPEC is set to: /root/cpu2006-1.2\_ic17u3

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda1 btrfs 921G 18G 902G 2% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 573

PowerEdge FC640 (Intel Xeon Gold 5122, 3.60 GHz)

SPECint\_rate\_base2006 = 544

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Sep-2017  
Hardware Availability: Sep-2017  
Software Availability: Apr-2017

## Platform Notes (Continued)

reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.0.0 08/10/2017

Memory:

3x 002C00B3002C 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666 MHz  
9x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666 MHz  
4x Not Specified Not Specified

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006-1.2\_ic17u3/lib/ia32:/root/cpu2006-1.2\_ic17u3/lib/intel64:/root/cpu2006-1.2\_ic17u3/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmmer: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 573

PowerEdge FC640 (Intel Xeon Gold 5122, 3.60 GHz)

SPECint\_rate\_base2006 = 544

CPU2006 license: 55

Test date: Sep-2017

Test sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Apr-2017

## Base Portability Flags (Continued)

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -D\_FILE\_OFFSET\_BITS=64

429.mcf: -D\_FILE\_OFFSET\_BITS=64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 573

PowerEdge FC640 (Intel Xeon Gold 5122, 3.60 GHz)

SPECint\_rate\_base2006 = 544

CPU2006 license: 55

Test date: Sep-2017

Test sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Apr-2017

## Peak Portability Flags (Continued)

456.hmmcr: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
 471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
 473.aster: -D\_FILE\_OFFSET\_BITS=64  
 483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -qopt-prefetch -auto-ilp32  
 -qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div  
 -qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: basepeak = yes

456.hmmcr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
 -qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -unroll4 -auto-ilp32  
 -qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -unroll2 -qopt-mem-layout-trans=3

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2)  
 -qopt-ra-region-strategy=block  
 -qopt-mem-layout-trans=3 -Wl,-z,muldefs

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 573

PowerEdge FC640 (Intel Xeon Gold 5122, 3.60 GHz)

SPECint\_rate\_base2006 = 544

CPU2006 license: 55

Test date: Sep-2017

Test sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Apr-2017

## Peak Optimization Flags (Continued)

471.omnetpp (continued):  
-L/sh10.2 -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Oct 4 12:38:26 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 October 2017.