



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.70 GHz, Intel Xeon Gold 6150)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1390

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

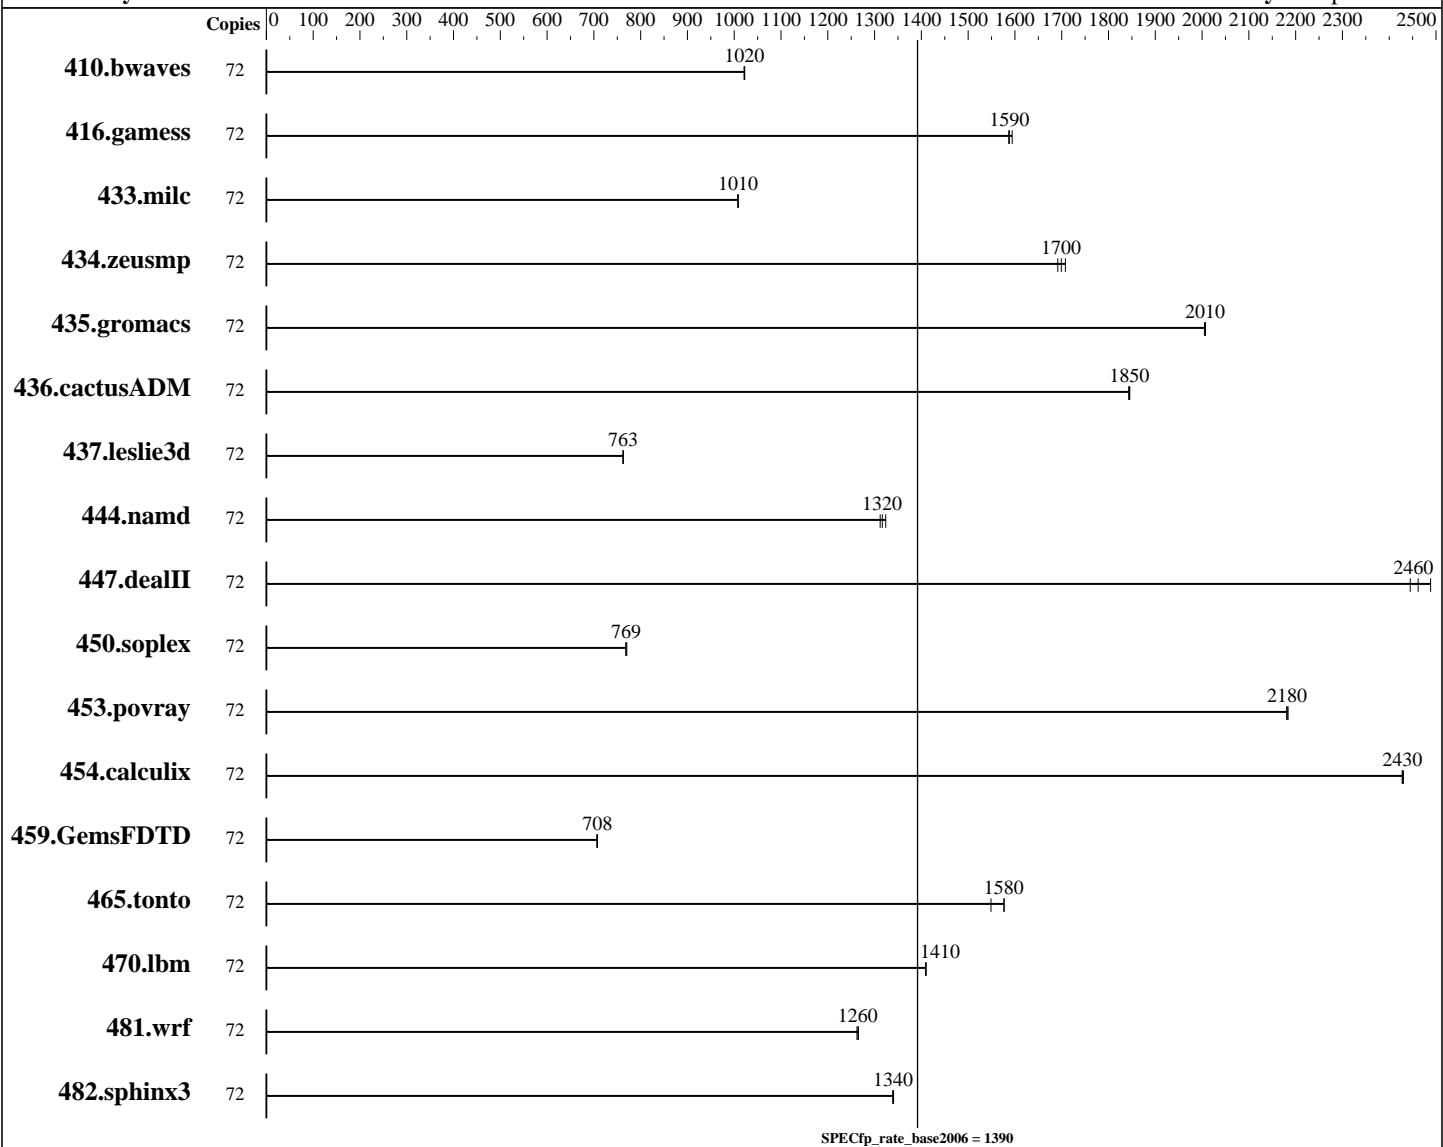

Hardware

CPU Name: Intel Xeon Gold 6150
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz: 2700
FPU: Integrated
CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip, 2 threads/core
CPU(s) orderable: 1, 2 chip(s)
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP2
Compiler: Kernel 4.4.21-69-default
C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;
Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel: No
File System: xfs
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.70 GHz, Intel Xeon Gold 6150)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1390

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

L3 Cache: 24.75 MB I+D on chip per chip
 Other Cache: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
 Disk Subsystem: 1 x 960 GB SATA SSD, RAID 0
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: Not Applicable
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	72	957	1020	958	1020	958	1020							
416.gamess	72	888	1590	884	1590	888	1590							
433.milc	72	656	1010	655	1010	656	1010							
434.zeusmp	72	384	1710	386	1700	387	1690							
435.gromacs	72	256	2010	256	2010	256	2010							
436.cactusADM	72	466	1850	467	1840	466	1850							
437.leslie3d	72	888	763	887	763	887	763							
444.namd	72	440	1310	439	1320	436	1320							
447.dealII	72	335	2460	337	2440	331	2490							
450.soplex	72	782	768	781	769	780	770							
453.povray	72	176	2180	176	2180	175	2180							
454.calculix	72	245	2430	244	2430	245	2430							
459.GemsFDTD	72	1080	708	1080	708	1082	706							
465.tonto	72	449	1580	457	1550	449	1580							
470.lbm	72	702	1410	702	1410	702	1410							
481.wrf	72	636	1260	636	1270	637	1260							
482.sphinx3	72	1048	1340	1047	1340	1048	1340							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

irqbalance disabled with "service irqbalance stop"

tuned profile set with "tuned-adm profile throughput-performance"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.70 GHz, Intel Xeon Gold 6150)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1390

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

Operating System Notes (Continued)

VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel numa_balancing"

Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling
LLC Prefetch set to Enabled
LLC Dead Line Allocation set to Disabled
Memory Patrol Scrubbing set to Disabled
Workload Profile set to General Throughput Compute
Minimum Processor Idle Power Core C-State set to C1E
Sysinfo program /home/cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-vjvj Fri Nov 3 12:30:38 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6150 CPU @ 2.70GHz
        2 "physical id"s (chips)
        72 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 18
    siblings   : 36
    physical 0: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 1: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
    cache size : 25344 KB
```

```
From /proc/meminfo
    MemTotal:      395922444 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.70 GHz, Intel Xeon Gold 6150)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1390

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

Platform Notes (Continued)

```
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-vjuj 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 2 15:28
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   852G   37G  815G   5% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS HPE I42 09/27/2017
```

```
Memory:
```

```
24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.70 GHz, Intel Xeon Gold 6150)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1390

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
  434.zeusmp: -DSPEC_CPU_LP64
  435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
  454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
      481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
  482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revF.html>



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.70 GHz, Intel Xeon Gold 6150)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1390

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revF.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Nov 29 12:30:16 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 November 2017.