



# SPEC® CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Bronze 3104,  
1.70 GHz)

**SPECfp®\_rate2006 = 362**

**SPECfp\_rate\_base2006 = 358**

**CPU2006 license:** 9019


**Test date:** Dec-2017

**Test sponsor:** Cisco Systems

**Hardware Availability:** Aug-2017

**Tested by:** Cisco Systems

**Software Availability:** Jun-2017

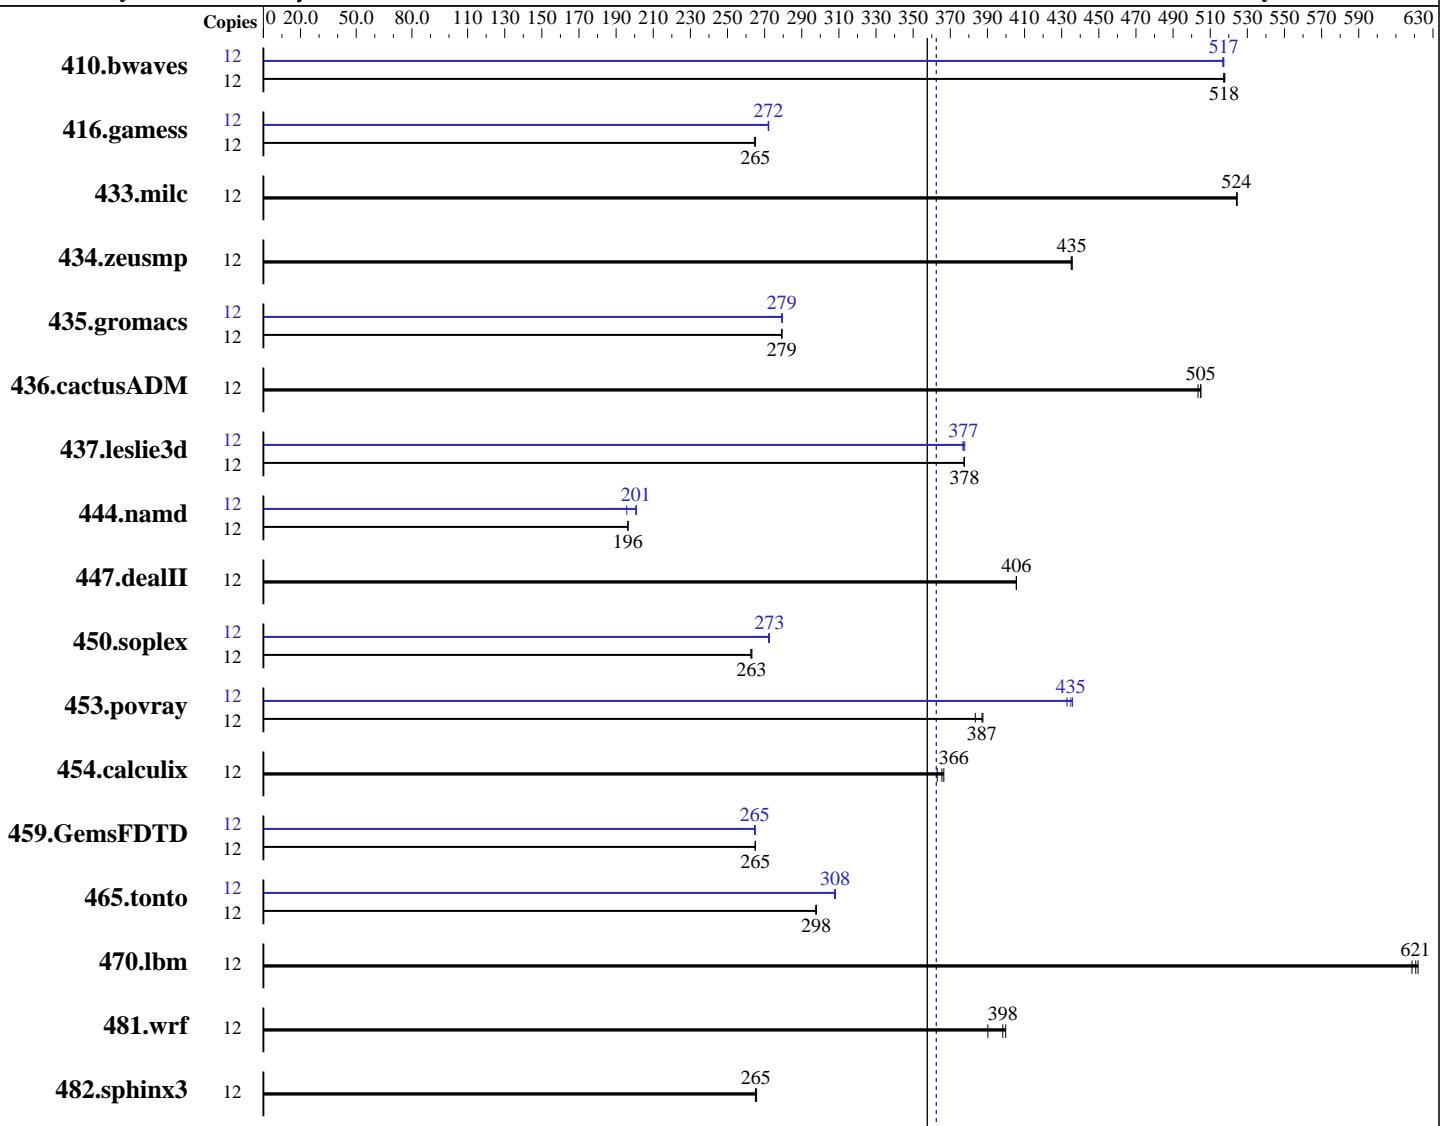

### Hardware

CPU Name: Intel Xeon Bronze 3104  
CPU Characteristics:  
CPU MHz:  
FPU: Integrated  
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
4.4.21-69-default  
Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
Auto Parallel: Yes  
File System: xfs  
System State: Run level 3 (multi-user)

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Bronze 3104,  
1.70 GHz)

**SPECfp\_rate2006 = 362**

**SPECfp\_rate\_base2006 = 358**

**CPU2006 license:** 9019

**Test date:** Dec-2017

**Test sponsor:** Cisco Systems

**Hardware Availability:** Aug-2017

**Tested by:** Cisco Systems

**Software Availability:** Jun-2017

L3 Cache: 8.25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 384 GB (24 x 16 GB 2Rx4 PC4-2666V-R,  
 running at 2133)  
 Disk Subsystem: 1 x 600 GB SAS HDD, 10K RPM  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	<b>315</b>	<b>518</b>	315	518	315	517	12	<b>316</b>	<b>517</b>	<b>315</b>	<b>517</b>	315	517
416.gamess	12	886	265	<b>886</b>	<b>265</b>	888	264	12	863	272	<b>864</b>	<b>272</b>	864	272
433.milc	12	210	525	210	524	<b>210</b>	<b>524</b>	12	210	525	210	524	<b>210</b>	<b>524</b>
434.zeusmp	12	251	435	<b>251</b>	<b>435</b>	251	436	12	<b>251</b>	<b>435</b>	<b>251</b>	<b>435</b>	251	436
435.gromacs	12	307	279	<b>307</b>	<b>279</b>	307	279	12	<b>307</b>	<b>279</b>	307	279	306	280
436.cactusADM	12	284	505	285	503	<b>284</b>	<b>505</b>	12	284	505	285	503	<b>284</b>	<b>505</b>
437.leslie3d	12	299	378	299	377	<b>299</b>	<b>378</b>	12	299	378	<b>299</b>	<b>377</b>	299	377
444.namd	12	490	196	<b>490</b>	<b>196</b>	490	196	12	<b>480</b>	<b>201</b>	479	201	492	196
447.dealII	12	338	406	338	406	<b>338</b>	<b>406</b>	12	338	406	338	406	<b>338</b>	<b>406</b>
450.soplex	12	380	263	<b>381</b>	<b>263</b>	381	263	12	368	272	<b>367</b>	<b>273</b>	367	273
453.povray	12	166	383	<b>165</b>	<b>387</b>	165	388	12	147	433	<b>147</b>	<b>435</b>	146	436
454.calculix	12	270	367	<b>271</b>	<b>366</b>	273	363	12	270	367	<b>271</b>	<b>366</b>	273	363
459.GemsFDTD	12	<b>480</b>	<b>265</b>	480	265	481	265	12	<b>481</b>	<b>265</b>	481	265	480	265
465.tonto	12	<b>397</b>	<b>298</b>	396	298	397	298	12	383	308	384	308	<b>383</b>	<b>308</b>
470.lbm	12	265	622	267	619	<b>266</b>	<b>621</b>	12	265	622	267	619	<b>266</b>	<b>621</b>
481.wrf	12	335	400	343	390	<b>337</b>	<b>398</b>	12	335	400	343	390	<b>337</b>	<b>398</b>
482.sphinx3	12	882	265	<b>882</b>	<b>265</b>	880	266	12	882	265	<b>882</b>	<b>265</b>	880	266

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Bronze 3104,  
1.70 GHz)

**SPECfp\_rate2006 = 362**

**SPECfp\_rate\_base2006 = 358**

**CPU2006 license:** 9019

**Test date:** Dec-2017

**Test sponsor:** Cisco Systems

**Hardware Availability:** Aug-2017

**Tested by:** Cisco Systems

**Software Availability:** Jun-2017

## Platform Notes

### BIOS Settings:

CPU performance set to Enterprise  
Power Performance Tuning set to OS Controls  
SNC set to Disabled  
Patrol Scrub set to Disabled  
Sysinfo program /home/cpu2006-1.2/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-ox2h Thu Dec 14 15:01:22 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Bronze 3104 CPU @ 1.70GHz
        2 "physical id"s (chips)
        12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 6
siblings : 6
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 8448 KB
```

```
From /proc/meminfo
MemTotal:      394653944 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Bronze 3104,  
1.70 GHz)

**SPECfp\_rate2006 = 362**

**SPECfp\_rate\_base2006 = 358**

**CPU2006 license:** 9019

**Test date:** Dec-2017

**Test sponsor:** Cisco Systems

**Hardware Availability:** Aug-2017

**Tested by:** Cisco Systems

**Software Availability:** Jun-2017

## Platform Notes (Continued)

```
Linux linux-ox2h 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016  
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 14 03:35
```

```
SPEC is set to: /home/cpu2006-1.2  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sdb5        xfs   317G   99G  219G  32% /home  
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Cisco Systems, Inc. C220M5.3.1.1d.0.0615170645 06/15/2017
```

Memory:

```
24x 0xCE00 M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz, configured at 2133 MHz
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006-1.2/lib/ia32:/home/cpu2006-1.2/lib/intel64:/home/cpu2006-1.2/sh10.2"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run  
runspec command invoked through numactl i.e.:
```

```
numactl --interleave=all runspec <etc>
```

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Bronze 3104,  
1.70 GHz)

**SPECfp\_rate2006 = 362**

**SPECfp\_rate\_base2006 = 358**

**CPU2006 license:** 9019

**Test date:** Dec-2017

**Test sponsor:** Cisco Systems

**Hardware Availability:** Aug-2017

**Tested by:** Cisco Systems

**Software Availability:** Jun-2017

## General Notes (Continued)

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

## Base Compiler Invocation

C benchmarks:

  icc -m64

C++ benchmarks:

  icpc -m64

Fortran benchmarks:

  ifort -m64

Benchmarks using both Fortran and C:

  icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
  433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
  444.namd: -DSPEC\_CPU\_LP64  
  447.dealII: -DSPEC\_CPU\_LP64  
  450.soplex: -DSPEC\_CPU\_LP64  
  453.povray: -DSPEC\_CPU\_LP64  
  454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
  465.tonto: -DSPEC\_CPU\_LP64  
  470.lbm: -DSPEC\_CPU\_LP64  
  481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

  -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
  -qopt-mem-layout-trans=3

C++ benchmarks:

  -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
  -qopt-mem-layout-trans=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Bronze 3104,  
1.70 GHz)

**SPECfp\_rate2006 = 362**

**SPECfp\_rate\_base2006 = 358**

**CPU2006 license:** 9019

**Test date:** Dec-2017

**Test sponsor:** Cisco Systems

**Hardware Availability:** Aug-2017

**Tested by:** Cisco Systems

**Software Availability:** Jun-2017

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Bronze 3104,  
1.70 GHz)

**SPECfp\_rate2006 = 362**

**SPECfp\_rate\_base2006 = 358**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Dec-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Jun-2017

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -fno-alias -auto-ilp32  
-qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-malloc-options=3  
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Bronze 3104,  
1.70 GHz)

**SPECfp\_rate2006 = 362**

**SPECfp\_rate\_base2006 = 358**

**CPU2006 license:** 9019

**Test date:** Dec-2017

**Test sponsor:** Cisco Systems

**Hardware Availability:** Aug-2017

**Tested by:** Cisco Systems

**Software Availability:** Jun-2017

## Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Mon Feb 26 10:21:23 2018 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 February 2018.