



# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL380 Gen10


(2.30 GHz, Intel Xeon Gold 6140)

SPECspeed2017\_int\_base = 8.79

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Oct-2017  
Hardware Availability: Oct-2017  
Software Availability: Sep-2017

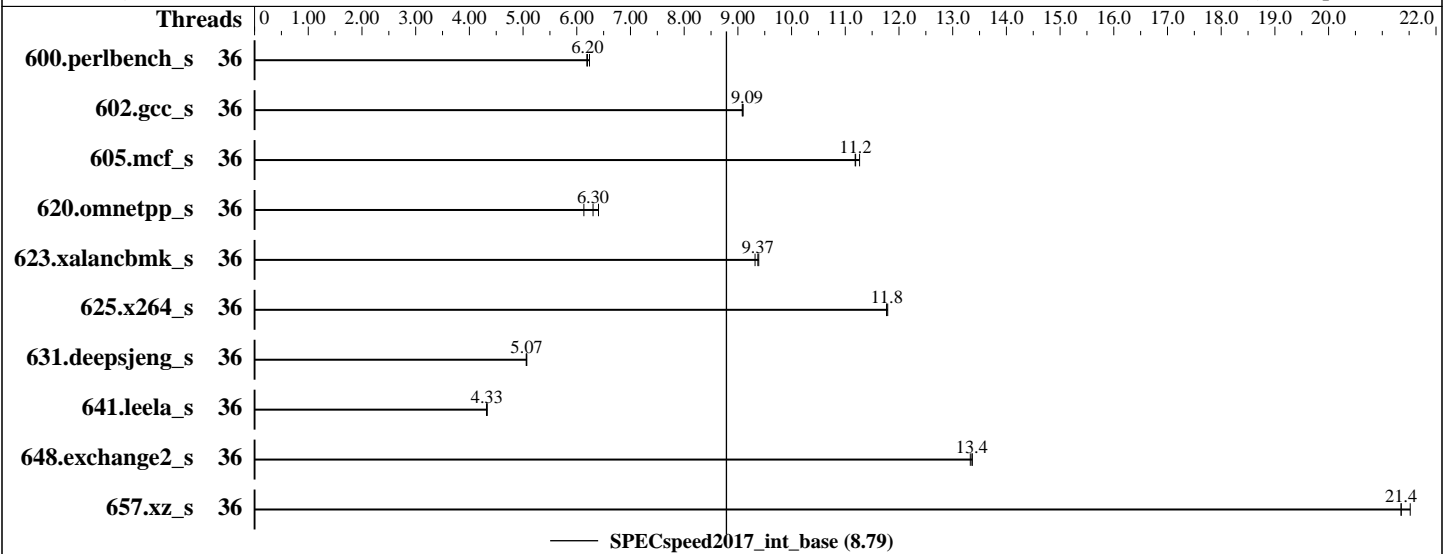

### Hardware

CPU Name: Intel Xeon Gold 6140  
Max MHz.: 3700  
Nominal: 2300  
Enabled: 36 cores, 2 chips  
Orderable: 1, 2 chip(s)  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 24.75 MB I+D on chip per chip  
Other: None  
Memory: 192 GB (24 x 8 GB 2Rx8 PC4-2666V-R)  
Storage: 1 x 960 GB SSD SATA, RAID 0  
Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
Kernel 3.10.0-514.el7.x86\_64  
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
Parallel: Yes  
Firmware: HPE BIOS Version U30 released Oct-2017 (tested with U30 9/29/2017)  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc: jemalloc memory allocator library V5.0.1;  
jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;  
jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;  
jemalloc: sources available from jemalloc.net or releases



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.30 GHz, Intel Xeon Gold 6140)

SPECspeed2017\_int\_base = 8.79

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Oct-2017  
Hardware Availability: Oct-2017  
Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	36	<b>286</b>	<b>6.20</b>	285	6.24	287	6.19							
602.gcc_s	36	439	9.08	<b>438</b>	<b>9.09</b>	438	9.10							
605.mcf_s	36	<b>422</b>	<b>11.2</b>	422	11.2	419	11.3							
620.omnetpp_s	36	266	6.13	<b>259</b>	<b>6.30</b>	255	6.40							
623.xalancbmk_s	36	<b>151</b>	<b>9.37</b>	151	9.39	152	9.32							
625.x264_s	36	150	11.8	150	11.8	<b>150</b>	<b>11.8</b>							
631.deepsjeng_s	36	283	5.06	<b>283</b>	<b>5.07</b>	283	5.07							
641.leela_s	36	395	4.32	<b>394</b>	<b>4.33</b>	394	4.33							
648.exchange2_s	36	<b>220</b>	<b>13.4</b>	221	13.3	220	13.4							
657.xz_s	36	287	21.5	290	21.3	<b>290</b>	<b>21.4</b>							

SPECspeed2017\_int\_base = 8.79

SPECspeed2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Filesystem page cache cleared with:  
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run  
irqbalance disabled with "systemctl stop irqbalance"  
tuned profile set with "tuned-adm profile throughput-performance"

## General Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32"  
LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/cpu2017/je5.0.1-64"  
OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4

## Platform Notes

BIOS Configuration:  
Intel Hyperthreading set to Disabled  
Thermal Configuration set to Maximum Cooling  
Memory Patrol Scrubbing set to Disabled  
LLC Prefetcher set to Enabled  
LLC Dead Line Allocation set to Disabled  
Stale A to S set to Disabled

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen10**

(2.30 GHz, Intel Xeon Gold 6140)

SPECspeed2017\_int\_base = 8.79

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

## Platform Notes (Continued)

Workload Pofile set to General Peak Frequency Compute  
Energy/Performance Bias set to Maximum Performance  
Uncore Frequency Scaling set to Auto  
Workload Pofile set to General Peak Frequency Compute  
NUMA Group Size Optimization set to Flat

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on DL380Gen10 Tue Oct 24 09:51:16 2017

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 6140 CPU @ 2.30GHz  
2 "physical id"s (chips)  
36 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 18  
siblings : 18  
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27  
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 36  
On-line CPU(s) list: 0-35  
Thread(s) per core: 1  
Core(s) per socket: 18  
Socket(s): 2  
NUMA node(s): 2  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 6140 CPU @ 2.30GHz  
Stepping: 4  
CPU MHz: 2300.000  
BogoMIPS: 4605.02  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 25344K

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen10**

(2.30 GHz, Intel Xeon Gold 6140)

SPECspeed2017\_int\_base = 8.79

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Oct-2017  
**Hardware Availability:** Oct-2017  
**Software Availability:** Sep-2017

## Platform Notes (Continued)

NUMA node0 CPU(s): 0-17  
NUMA node1 CPU(s): 18-35

/proc/cpuinfo cache data  
cache size : 25344 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

From /proc/meminfo  
MemTotal: 197571672 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*  
os-release:  
NAME="Red Hat Enterprise Linux Server"  
VERSION="7.3 (Maipo)"  
ID="rhel"  
ID\_LIKE="fedora"  
VERSION\_ID="7.3"  
PRETTY\_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"  
ANSI\_COLOR="0;31"  
CPE\_NAME="cpe:/o:redhat:enterprise\_linux:7.3:GA:server"  
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
system-release-cpe: cpe:/o:redhat:enterprise\_linux:7.3:ga:server

uname -a:  
Linux DL380Gen10 3.10.0-514.el7.x86\_64 #1 SMP Wed Oct 19 11:24:13 EDT 2016 x86\_64  
x86\_64 x86\_64 GNU/Linux

run-level 3 Oct 24 09:50

SPEC is set to: /home/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/rhel-home xfs 839G 30G 810G 4% /home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U30 09/29/2017  
Memory:  
24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666

(End of data from sysinfo program)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen10**

(2.30 GHz, Intel Xeon Gold 6140)

SPECspeed2017\_int\_base = 8.79

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

## Compiler Version Notes

=====  
CC 600.perlbench\_s(base) 602.gcc\_s(base) 605.mcf\_s(base) 625.x264\_s(base)  
657.xz\_s(base)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base)  
641.leela\_s(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 648.exchange2\_s(base)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen10**

(2.30 GHz, Intel Xeon Gold 6140)

SPECspeed2017\_int\_base = 8.79

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

## Base Portability Flags (Continued)

641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc

## Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.xml>



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen10**

(2.30 GHz, Intel Xeon Gold 6140)

SPECspeed2017\_int\_base = 8.79

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-10-24 09:51:15-0400.

Report generated on 2018-10-31 13:00:04 by CPU2017 PDF formatter v6067.

Originally published on 2017-11-14.