



# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Gold 6140)

SPECspeed2017\_int\_base = 8.75

SPECspeed2017\_int\_peak = 9.02

CPU2017 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jun-2018

Hardware Availability: Jul-2017

Software Availability: Feb-2018

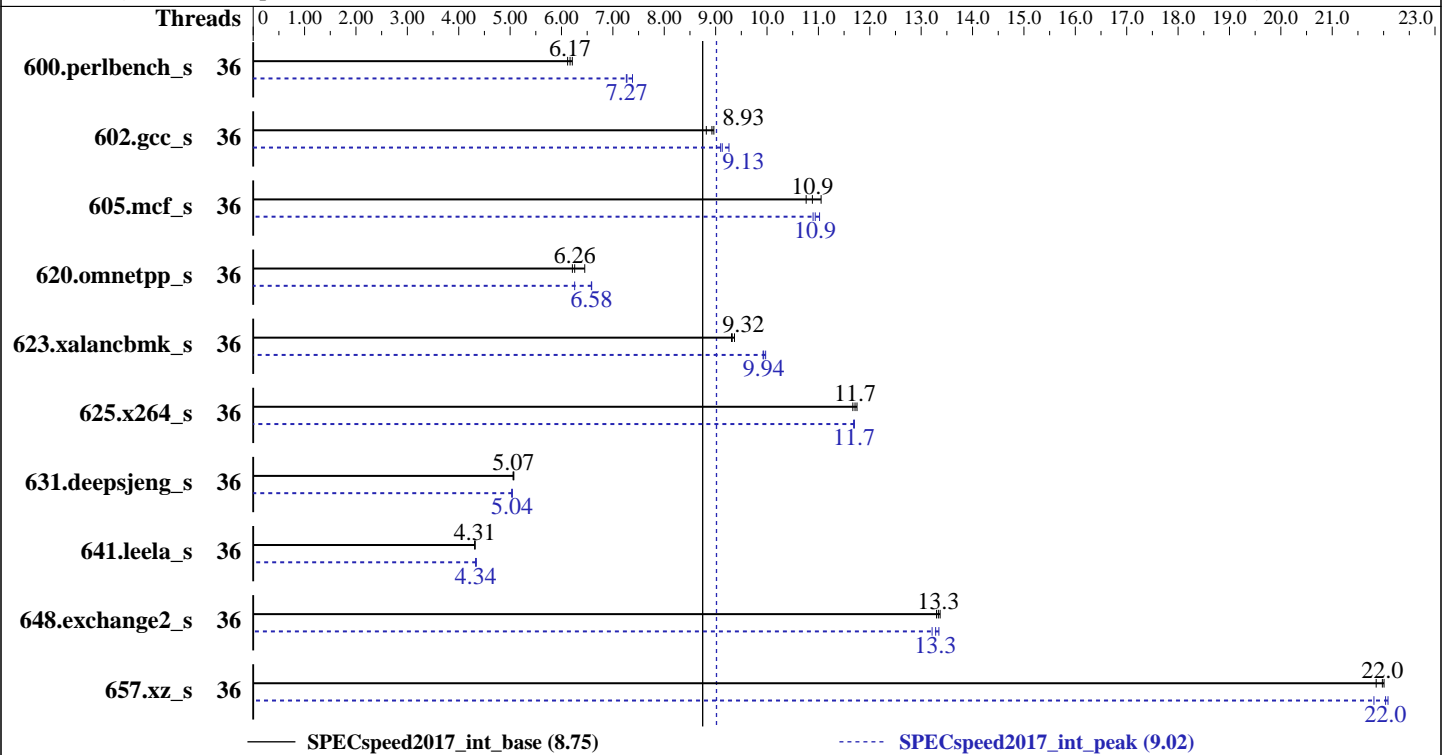

### Hardware

CPU Name: Intel Xeon Gold 6140  
 Max MHz.: 3700  
 Nominal: 2300  
 Enabled: 36 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 24.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)  
 Storage: 1 x 200 GB SATA III SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86\_64)  
 Kernel 4.4.114-94.11-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: Yes  
 Firmware: Supermicro BIOS version 2.0b released Feb-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator library V5.0.1



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Gold 6140)

SPECspeed2017\_int\_base = 8.75

SPECspeed2017\_int\_peak = 9.02

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Jun-2018  
Hardware Availability: Jul-2017  
Software Availability: Feb-2018

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	36	<b>288</b>	<b>6.17</b>	290	6.12	286	6.21	36	244	7.26	<b>244</b>	<b>7.27</b>	240	7.38
602.gcc_s	36	444	8.97	<b>446</b>	<b>8.93</b>	452	8.82	36	430	9.26	438	9.10	<b>436</b>	<b>9.13</b>
605.mcf_s	36	427	11.1	439	10.8	<b>434</b>	<b>10.9</b>	36	433	10.9	428	11.0	<b>432</b>	<b>10.9</b>
620.omnetpp_s	36	253	6.45	263	6.21	<b>261</b>	<b>6.26</b>	36	248	6.59	261	6.26	<b>248</b>	<b>6.58</b>
623.xalancbmk_s	36	152	9.31	<b>152</b>	<b>9.32</b>	151	9.37	36	142	9.97	<b>143</b>	<b>9.94</b>	143	9.92
625.x264_s	36	<b>151</b>	<b>11.7</b>	150	11.8	151	11.7	36	151	11.7	151	11.7	<b>151</b>	<b>11.7</b>
631.deepsjeng_s	36	283	5.07	<b>283</b>	<b>5.07</b>	283	5.06	36	<b>284</b>	<b>5.04</b>	285	5.03	284	5.04
641.leela_s	36	395	4.32	396	4.31	<b>395</b>	<b>4.31</b>	36	394	4.33	393	4.34	<b>394</b>	<b>4.34</b>
648.exchange2_s	36	220	13.4	<b>220</b>	<b>13.3</b>	221	13.3	36	220	13.3	<b>221</b>	<b>13.3</b>	223	13.2
657.xz_s	36	283	21.9	<b>281</b>	<b>22.0</b>	281	22.0	36	283	21.8	280	22.1	<b>281</b>	<b>22.0</b>

SPECspeed2017\_int\_base = 8.75

SPECspeed2017\_int\_peak = 9.02

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;

jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Gold 6140)

SPECspeed2017\_int\_base = 8.75

SPECspeed2017\_int\_peak = 9.02

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Feb-2018

## Platform Notes

BIOS Settings:

Hyper-Threading = Disable  
LLC prefetch = Enable  
Power Technology = Custom  
Power Performance Tuning = BIOS Controls EPB  
ENERGY\_PERF\_BIAS\_CFG mode = Extreme Performance  
Hardware P-state = Out of Band Mode  
XPT Prefetch = Enable  
Stale AtoS = Enable  
LLC dead line alloc = Disable  
SDDC Plus One = Disable  
ADDDC Sparing = Disable  
Patrol Scrub = Disable  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-52ma Mon Jun 4 11:17:26 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6140 CPU @ 2.30GHz
 2 "physical id"s (chips)
 36 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 18
siblings : 18
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 36
On-line CPU(s) list:   0-35
Thread(s) per core:    1
Core(s) per socket:    18
Socket(s):              2
NUMA node(s):          2
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Gold 6140 CPU @ 2.30GHz
Stepping:               4
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Gold 6140)

SPECspeed2017\_int\_base = 8.75

SPECspeed2017\_int\_peak = 9.02

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Feb-2018

### Platform Notes (Continued)

CPU MHz: 2300.015  
BogoMIPS: 4600.03  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 25344K  
NUMA node0 CPU(s): 0-17  
NUMA node1 CPU(s): 18-35

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch ida arat epb invpcid\_single pln pts dtherm hwp\_epp intel\_pt rsb\_ctxsw spec\_ctrl retpoline kaiser tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm\_llc cqm\_occup\_llc pku ospke

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17
node 0 size: 192094 MB
node 0 free: 191657 MB
node 1 cpus: 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35
node 1 size: 193516 MB
node 1 free: 193104 MB
node distances:
node 0 1
0: 10 21
1: 21 10
```

```
From /proc/meminfo
MemTotal: 394865476 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Gold 6140)

SPECspeed2017\_int\_base = 8.75

SPECspeed2017\_int\_peak = 9.02

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Feb-2018

### Platform Notes (Continued)

# This file is deprecated and will be removed in a future service pack or release.  
# Please check /etc/os-release for details about this release.

```
os-release:
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

```
uname -a:
Linux linux-52ma 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 4 11:02
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   145G   56G   89G   39% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 2.0b 02/24/2018
Memory:
12x NO DIMM NO DIMM
12x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====
CC 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base,
   peak) 657.xz_s(base)
-----

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CC 600.perlbench_s(peak) 602.gcc_s(peak) 605.mcf_s(peak) 657.xz_s(peak)
-----

icc (ICC) 18.0.0 20170811
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Gold 6140)

SPECspeed2017\_int\_base = 8.75

SPECspeed2017\_int\_peak = 9.02

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Feb-2018

### Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CXXC 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base)  
641.leela\_s(base)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CXXC 620.omnetpp\_s(peak) 623.xalancbmk\_s(peak) 631.deepsjeng\_s(peak)  
641.leela\_s(peak)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 648.exchange2\_s(base, peak)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

### Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Gold 6140)

SPECspeed2017\_int\_base = 8.75

SPECspeed2017\_int\_peak = 9.02

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Feb-2018

## Base Portability Flags (Continued)

```
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

## Peak Compiler Invocation

C benchmarks:

```
icc
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Gold 6140)

SPECspeed2017\_int\_base = 8.75

SPECspeed2017\_int\_peak = 9.02

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Feb-2018

## Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/je5.0.1-64/lib -ljemalloc

602.gcc_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc

605.mcf_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

625.x264_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

(Continued on next page)





# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Gold 6140)

SPECspeed2017\_int\_base = 8.75

SPECspeed2017\_int\_peak = 9.02

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Feb-2018

## Peak Optimization Flags (Continued)

657.xz\_s: Same as 602.gcc\_s

C++ benchmarks:

```
620.omnetpp_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
623.xalancbmk_s: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

631.deepsjeng\_s: Same as 620.omnetpp\_s

641.leela\_s: Same as 620.omnetpp\_s

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Peak Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks (except as noted below):

```
-m64
```

623.xalancbmk\_s: -m32

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revC.html>



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Gold 6140)

SPECspeed2017\_int\_base = 8.75

SPECspeed2017\_int\_peak = 9.02

**CPU2017 License:** 001176

**Test Sponsor:** Supermicro

**Tested by:** Supermicro

**Test Date:** Jun-2018

**Hardware Availability:** Jul-2017

**Software Availability:** Feb-2018

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-06-03 23:17:26-0400.

Report generated on 2018-10-31 17:37:20 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-26.