



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Silver 4116
2.10 GHz)

SPECrate2017_fp_base = 127

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2018

Hardware Availability: Aug-2017

Software Availability: Oct-2018

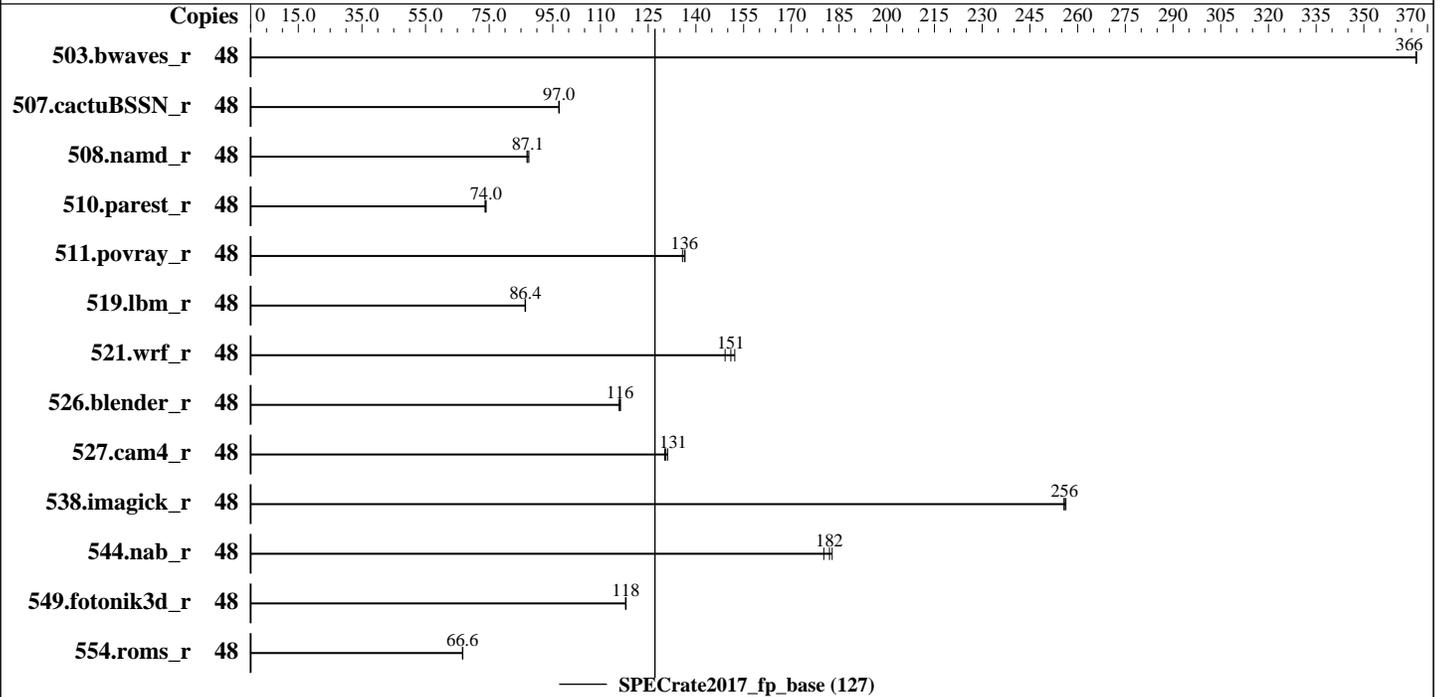

Hardware

CPU Name: Intel Xeon Silver 4116
 Max MHz.: 3000
 Nominal: 2100
 Enabled: 24 cores, 2 chips, 2 threads/core
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 16.5 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R,
 running at 2400)
 Storage: 1 x 400 GB SAS SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86_64)
 4.4.120-92.70-default
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 19.0.1.144 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Version 4.0.1 released Oct-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Silver 4116
2.10 GHz)

SPECrate2017_fp_base = 127

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Dec-2018
Hardware Availability: Aug-2017
Software Availability: Oct-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	1314	366	<u>1314</u>	<u>366</u>	1313	367							
507.cactuBSSN_r	48	626	97.0	627	96.9	<u>626</u>	<u>97.0</u>							
508.namd_r	48	525	86.9	521	87.5	<u>523</u>	<u>87.1</u>							
510.parest_r	48	1704	73.7	1697	74.0	<u>1697</u>	<u>74.0</u>							
511.povray_r	48	<u>822</u>	<u>136</u>	821	137	826	136							
519.lbm_r	48	586	86.3	<u>586</u>	<u>86.4</u>	585	86.4							
521.wrf_r	48	706	152	<u>712</u>	<u>151</u>	721	149							
526.blender_r	48	<u>630</u>	<u>116</u>	629	116	631	116							
527.cam4_r	48	645	130	640	131	<u>643</u>	<u>131</u>							
538.imagick_r	48	466	256	467	256	<u>467</u>	<u>256</u>							
544.nab_r	48	<u>444</u>	<u>182</u>	442	183	448	180							
549.fotonik3d_r	48	1585	118	1587	118	<u>1585</u>	<u>118</u>							
554.roms_r	48	1143	66.7	1145	66.6	<u>1144</u>	<u>66.6</u>							

SPECrate2017_fp_base = 127

SPECrate2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Silver 4116
2.10 GHz)

SPECrate2017_fp_base = 127

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2018

Hardware Availability: Aug-2017

Software Availability: Oct-2018

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

Intel HyperThreading Technology set to Enabled

CPU performance set to Enterprise

Power Performance Tuning set to OS Controls

SNC set to Enabled

IMC Interleaving set to 1-way Interleave

Patrol Scrub set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-yool Tue Dec 11 11:27:50 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4116 CPU @ 2.10GHz

2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 24

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 48

On-line CPU(s) list: 0-47

Thread(s) per core: 2

Core(s) per socket: 12

Socket(s): 2

NUMA node(s): 4

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Silver 4116
2.10 GHz)

SPECrate2017_fp_base = 127

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Dec-2018
Hardware Availability: Aug-2017
Software Availability: Oct-2018

Platform Notes (Continued)

```

Model name: Intel(R) Xeon(R) Silver 4116 CPU @ 2.10GHz
Stepping: 4
CPU MHz: 897.250
CPU max MHz: 3000.0000
CPU min MHz: 800.0000
BogoMIPS: 4190.15
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 16896K
NUMA node0 CPU(s): 0-2,6-8,24-26,30-32
NUMA node1 CPU(s): 3-5,9-11,27-29,33-35
NUMA node2 CPU(s): 12-14,18-20,36-38,42-44
NUMA node3 CPU(s): 15-17,21-23,39-41,45-47
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm hwp hwp_act_window hwp_epp hwp_pkg_req intel_pt rsb_ctxsw spec_ctrl stibp
retpoline kaiser tpr_shadow vmmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt
clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 16896 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 6 7 8 24 25 26 30 31 32
node 0 size: 192097 MB
node 0 free: 191856 MB
node 1 cpus: 3 4 5 9 10 11 27 28 29 33 34 35
node 1 size: 193528 MB
node 1 free: 193295 MB
node 2 cpus: 12 13 14 18 19 20 36 37 38 42 43 44
node 2 size: 193528 MB
node 2 free: 193318 MB
node 3 cpus: 15 16 17 21 22 23 39 40 41 45 46 47
node 3 size: 193525 MB
node 3 free: 193200 MB
node distances:
node 0 1 2 3
0: 10 11 21 21

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Silver 4116
2.10 GHz)

SPECrate2017_fp_base = 127

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Dec-2018
Hardware Availability: Aug-2017
Software Availability: Oct-2018

Platform Notes (Continued)

```
1: 11 10 21 21
2: 21 21 10 11
3: 21 21 11 10
```

From /proc/meminfo

```
MemTotal: 791224968 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/*release* /etc/*version*

SuSE-release:

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
```

```
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

os-release:

```
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

uname -a:

```
Linux linux-yool 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Dec 11 11:23

SPEC is set to: /home/cpu2017

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda1 xfs 224G 117G 108G 52% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. C240M5.4.0.1.139.1003182220 10/03/2018

Memory:

```
12x 0xCE00 M393A4K40BB2-CTD 32 GB 2 rank 2666, configured at 2400
12x 0xCE00 M393A4K40CB2-CTD 32 GB 2 rank 2666, configured at 2400
```

(End of data from sysinfo program)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Silver 4116
2.10 GHz)

SPECrate2017_fp_base = 127

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Dec-2018
Hardware Availability: Aug-2017
Software Availability: Oct-2018

Compiler Version Notes

=====
CC 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

icc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(base) 510.parest_r(base)

icpc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(base) 526.blender_r(base)

icpc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 507.cactuBSSN_r(base)

icpc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
ifort (IFORT) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

ifort (IFORT) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(base) 527.cam4_r(base)

ifort (IFORT) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 19.0.1.144 20181018

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Silver 4116
2.10 GHz)

SPECrate2017_fp_base = 127

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2018

Hardware Availability: Aug-2017

Software Availability: Oct-2018

Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
```

```
507.cactuBSSN_r: -DSPEC_LP64
```

```
508.namd_r: -DSPEC_LP64
```

```
510.parest_r: -DSPEC_LP64
```

```
511.povray_r: -DSPEC_LP64
```

```
519.lbm_r: -DSPEC_LP64
```

```
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
```

```
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
```

```
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
```

```
538.imagick_r: -DSPEC_LP64
```

```
544.nab_r: -DSPEC_LP64
```

```
549.fotonik3d_r: -DSPEC_LP64
```

```
554.roms_r: -DSPEC_LP64
```



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Silver 4116
2.10 GHz)

SPECrate2017_fp_base = 127

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2018

Hardware Availability: Aug-2017

Software Availability: Oct-2018

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-12-11 00:57:49-0500.

Report generated on 2019-02-01 14:42:25 by CPU2017 PDF formatter v6067.

Originally published on 2019-01-29.