



SPEC® CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_int_base = 11.3

Huawei 5288 V5 (Intel Xeon Gold 6244)

SPECspeed2017_int_peak = Not Run

CPU2017 License: 3175


Test Sponsor: Huawei

Tested by: Huawei

Test Date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

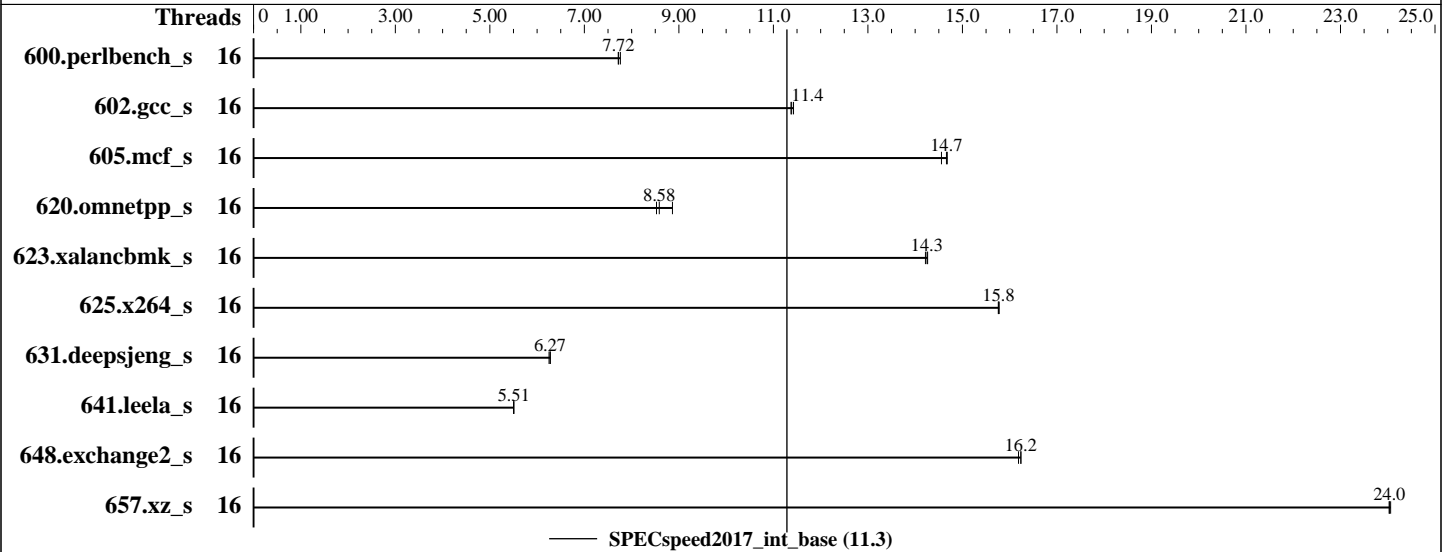

Hardware

CPU Name: Intel Xeon Gold 6244
 Max MHz.: 4400
 Nominal: 3600
 Enabled: 16 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x 1200 GB SAS, 10000 RPM
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86_64) 4.12.14-94.41-default
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux;
 Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux
 Parallel: Yes
 Firmware: Version 6.36 Released Feb-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_int_base = 11.3

Huawei 5288 V5 (Intel Xeon Gold 6244)

SPECspeed2017_int_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Feb-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	16	230	7.72	229	7.76	<u>230</u>	<u>7.72</u>							
602.gcc_s	16	350	11.4	349	11.4	<u>350</u>	<u>11.4</u>							
605.mcf_s	16	324	14.6	322	14.7	<u>322</u>	<u>14.7</u>							
620.omnetpp_s	16	<u>190</u>	<u>8.58</u>	191	8.53	184	8.86							
623.xalancbmk_s	16	99.7	14.2	99.3	14.3	<u>99.4</u>	<u>14.3</u>							
625.x264_s	16	112	15.8	<u>112</u>	<u>15.8</u>	112	15.8							
631.deepsjeng_s	16	229	6.25	228	6.28	<u>228</u>	<u>6.27</u>							
641.leela_s	16	<u>310</u>	<u>5.51</u>	310	5.51	310	5.50							
648.exchange2_s	16	181	16.2	182	16.2	<u>181</u>	<u>16.2</u>							
657.xz_s	16	257	24.1	<u>257</u>	<u>24.0</u>	257	24.0							

SPECspeed2017_int_base = 11.3

SPECspeed2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"
OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_int_base = 11.3

Huawei 5288 V5 (Intel Xeon Gold 6244)

SPECspeed2017_int_peak = Not Run

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

Platform Notes

BIOS configuration:
 Power Policy Set to Load Balance
 Hyper-Threading Set to Disable
 XPT Prefetch Set to Enabled
 Sysinfo program /spec2017/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on linux-xz5s Tue Dec 4 01:59:17 2018

SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
 model name : Intel(R) Xeon(R) Gold 6244 CPU @ 3.60GHz
 2 "physical id"s (chips)
 16 "processors"
 cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
 cpu cores : 8
 siblings : 8
 physical 0: cores 2 3 9 11 17 24 27
 physical 1: cores 4 8 17 18 19 24 25 27

From lscpu:
 Architecture: x86_64
 CPU op-mode(s): 32-bit, 64-bit
 Byte Order: Little Endian
 CPU(s): 16
 On-line CPU(s) list: 0-15
 Thread(s) per core: 1
 Core(s) per socket: 8
 Socket(s): 2
 NUMA node(s): 2
 Vendor ID: GenuineIntel
 CPU family: 6
 Model: 85
 Model name: Intel(R) Xeon(R) Gold 6244 CPU @ 3.60GHz
 Stepping: 6
 CPU MHz: 3600.000
 CPU max MHz: 4400.0000
 CPU min MHz: 1200.0000
 BogoMIPS: 7200.00
 Virtualization: VT-x
 L1d cache: 32K
 L1i cache: 32K
 L2 cache: 1024K
 L3 cache: 25344K

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_int_base = 11.3

Huawei 5288 V5 (Intel Xeon Gold 6244)

SPECspeed2017_int_peak = Not Run

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

Platform Notes (Continued)

```

NUMA node0 CPU(s):      0-7
NUMA node1 CPU(s):      8-15
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 25344 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 385471 MB
node 0 free: 381763 MB
node 1 cpus: 8 9 10 11 12 13 14 15
node 1 size: 386787 MB
node 1 free: 380798 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10

```

```

From /proc/meminfo
MemTotal:      790792768 kB
HugePages_Total:      0
Hugepagesize:   2048 kB

```

From /etc/*release* /etc/*version*

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"

```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_int_base = 11.3

Huawei 5288 V5 (Intel Xeon Gold 6244)

SPECspeed2017_int_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Feb-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Platform Notes (Continued)

```
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"
```

```
uname -a:
Linux linux-xz5s 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 3 19:29
```

```
SPEC is set to: /spec2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        xfs   212G   73G  139G  35% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS INSYDE Corp. 6.36 02/15/2019
Memory:
24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base)
657.xz_s(base)
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
641.leela_s(base)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
=====
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_int_base = 11.3

Huawei 5288 V5 (Intel Xeon Gold 6244)

SPECspeed2017_int_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Feb-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Compiler Version Notes (Continued)

FC 648.exchange2_s(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_int_base = 11.3

Huawei 5288 V5 (Intel Xeon Gold 6244)

SPECspeed2017_int_peak = Not Run

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

Fortran benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-12-04 01:59:17-0500.

Report generated on 2019-05-15 13:25:07 by CPU2017 PDF formatter v6067.

Originally published on 2019-05-14.