



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.20 GHz, Intel Xeon Silver 4210)

SPECspeed®2017_int_base = 7.90

SPECspeed®2017_int_peak = 8.07

CPU2017 License: 3


Test Date: Mar-2019

Test Sponsor: HPE

Hardware Availability: Apr-2019

Tested by: HPE

Software Availability: Nov-2018

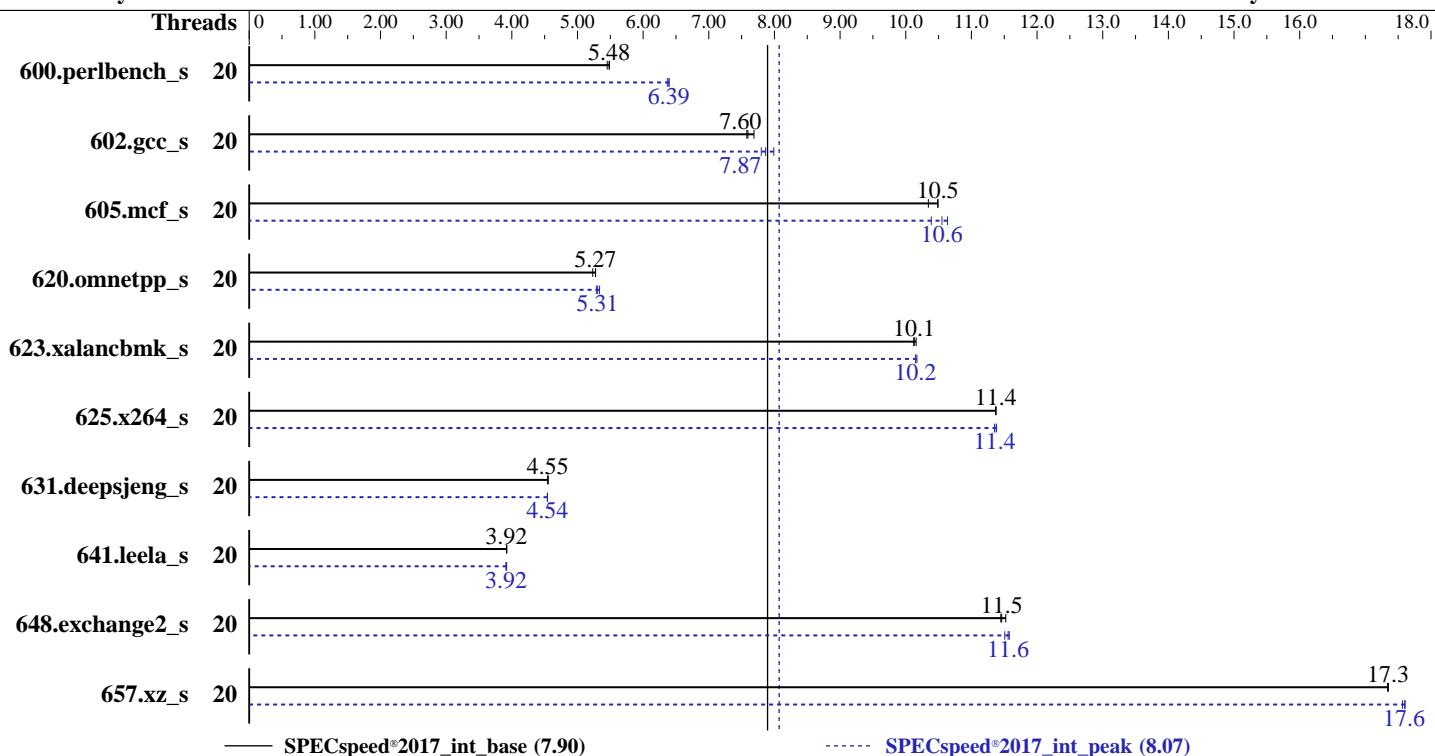

Hardware		Software	
CPU Name:	Intel Xeon Silver 4210	OS:	SUSE Linux Enterprise Server 15 (x86_64)
Max MHz:	3200	Compiler:	Kernel 4.12.14-23-default
Nominal:	2200	Parallel:	C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux;
Enabled:	20 cores, 2 chips	Firmware:	Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux
Orderable:	1, 2 chip(s)	File System:	Yes
Cache L1:	32 KB I + 32 KB D on chip per core	System State:	HPE BIOS Version U30 02/02/2019 released Apr-2019
L2:	1 MB I+D on chip per core	Base Pointers:	xfs
L3:	13.75 MB I+D on chip per chip	Peak Pointers:	Run level 3 (multi-user)
Other:	None	Other:	64-bit
Memory:	384 GB (24 x 16 GB 2Rx8 PC4-2666V-R, running at 2400)	Power Management:	64-bit
Storage:	1 x 960 GB SATA SSD, RAID 0		jemalloc memory allocator V5.0.1
Other:	None		--



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.20 GHz, Intel Xeon Silver 4210)

SPECspeed®2017_int_base = 7.90

SPECspeed®2017_int_peak = 8.07

CPU2017 License: 3

Test Date: Mar-2019

Test Sponsor: HPE

Hardware Availability: Apr-2019

Tested by: HPE

Software Availability: Nov-2018

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	20	326	5.45	324	5.48	324	5.49	20	278	6.40	278	6.39	279	6.37		
602.gcc_s	20	525	7.58	518	7.69	524	7.60	20	506	7.87	511	7.80	498	7.99		
605.mcf_s	20	450	10.5	450	10.5	456	10.3	20	444	10.6	454	10.4	447	10.6		
620.omnetpp_s	20	309	5.27	309	5.28	312	5.23	20	309	5.29	306	5.34	307	5.31		
623.xalancbmk_s	20	140	10.1	140	10.1	139	10.2	20	139	10.2	140	10.2	140	10.2		
625.x264_s	20	155	11.4	155	11.4	155	11.4	20	155	11.4	155	11.4	155	11.4		
631.deepsjeng_s	20	315	4.55	315	4.55	315	4.55	20	315	4.54	315	4.54	316	4.54		
641.leela_s	20	435	3.92	435	3.92	435	3.92	20	435	3.92	436	3.92	436	3.91		
648.exchange2_s	20	255	11.5	257	11.4	257	11.5	20	254	11.6	255	11.5	254	11.6		
657.xz_s	20	357	17.3	356	17.3	356	17.3	20	351	17.6	352	17.6	351	17.6		
SPECspeed®2017_int_base =								7.90								
SPECspeed®2017_int_peak =								8.07								

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"
OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.20 GHz, Intel Xeon Silver 4210)

SPECspeed®2017_int_base = 7.90

SPECspeed®2017_int_peak = 8.07

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Nov-2018

Platform Notes

BIOS Configuration:

Hyper-Threading set to Disabled

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

LLC Prefetch set to Enabled

LLC Dead Line Allocation set to Disabled

Enhanced Processor Performance set to Enabled

Workload Profile set to General Peak Frequency Compute

Energy/Performance Bias set to Balanced Power

Workload Profile set to Custom

Numa Group Size Optimization set to Flat

Intel UPI Link Power Management set to Enabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on dl380-clx-sles15hs Wed Apr 10 21:39:34 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Silver 4210 CPU @ 2.20GHz
  2 "physical id"s (chips)
  20 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 10
  siblings   : 10
  physical 0: cores 0 1 2 3 4 8 9 10 11 12
  physical 1: cores 0 1 2 3 4 8 9 10 11 12
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                20
On-line CPU(s) list:  0-19
Thread(s) per core:   1
Core(s) per socket:   10
Socket(s):             2
NUMA node(s):          2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Silver 4210 CPU @ 2.20GHz
Stepping:               6
CPU MHz:               2200.000
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.20 GHz, Intel Xeon Silver 4210)

SPECspeed®2017_int_base = 7.90

SPECspeed®2017_int_peak = 8.07

CPU2017 License: 3

Test Date: Mar-2019

Test Sponsor: HPE

Hardware Availability: Apr-2019

Tested by: HPE

Software Availability: Nov-2018

Platform Notes (Continued)

BogoMIPS: 4400.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 14080K
NUMA node0 CPU(s): 0-9
NUMA node1 CPU(s): 10-19
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpf perf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single intel_ppin mba tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local ibpb ibrs stibp dtherm ida arat pln pts pku ospke avx512_vnni arch_capabilities ssbd

/proc/cpuinfo cache data
cache size : 14080 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9
node 0 size: 193019 MB
node 0 free: 192615 MB
node 1 cpus: 10 11 12 13 14 15 16 17 18 19
node 1 size: 193336 MB
node 1 free: 192973 MB
node distances:
node 0 1
0: 10 21
1: 21 10

From /proc/meminfo
MemTotal: 395628868 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.20 GHz, Intel Xeon Silver 4210)

SPECspeed®2017_int_base = 7.90

SPECspeed®2017_int_peak = 8.07

CPU2017 License: 3

Test Date: Mar-2019

Test Sponsor: HPE

Hardware Availability: Apr-2019

Tested by: HPE

Software Availability: Nov-2018

Platform Notes (Continued)

```
PRETTY_NAME="SUSE Linux Enterprise Server 15"
```

```
ID="sles"
```

```
ID_LIKE="suse"
```

```
ANSI_COLOR="0;32"
```

```
CPE_NAME="cpe:/o:suse:sles:15"
```

```
uname -a:
```

```
Linux dl380-clx-sles15hs 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018
(cd0437b) x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
```

```
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
```

```
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW
```

```
run-level 3 Apr 10 21:37
```

```
SPEC is set to: /home/cpu2017
```

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	476G	34G	443G	7%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS HPE U30 02/02/2019
```

```
Memory:
```

```
24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666, configured at 2400
```

(End of data from sysinfo program)

Compiler Version Notes

```
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
| peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
```

```
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

```
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.20 GHz, Intel Xeon Silver 4210)

SPECspeed®2017_int_base = 7.90

SPECspeed®2017_int_peak = 8.07

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Nov-2018

Compiler Version Notes (Continued)

| 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
Fortran | 648.exchange2_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.20 GHz, Intel Xeon Silver 4210)

SPECspeed®2017_int_base = 7.90

SPECspeed®2017_int_peak = 8.07

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Nov-2018

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3  
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -fno-strict-overflow  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.20 GHz, Intel Xeon Silver 4210)

SPECspeed®2017_int_base = 7.90

SPECspeed®2017_int_peak = 8.07

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Nov-2018

Peak Optimization Flags (Continued)

602.gcc_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

605.mcf_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

625.x264_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

657.xz_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

620.omnetpp_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkalloc

623.xalancbmk_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkalloc

631.deepsjeng_s: Same as 623.xalancbmk_s

641.leela_s: Same as 623.xalancbmk_s

Fortran benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>
<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.html>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.20 GHz, Intel Xeon Silver 4210)

SPECspeed®2017_int_base = 7.90

SPECspeed®2017_int_peak = 8.07

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Nov-2018

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-04-10 21:39:34-0400.

Report generated on 2019-11-05 10:47:23 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-04.