



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.80 GHz, AMD EPYC 7402)

SPECspeed®2017_int_base = 7.57

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Oct-2019

Software Availability: Jun-2019

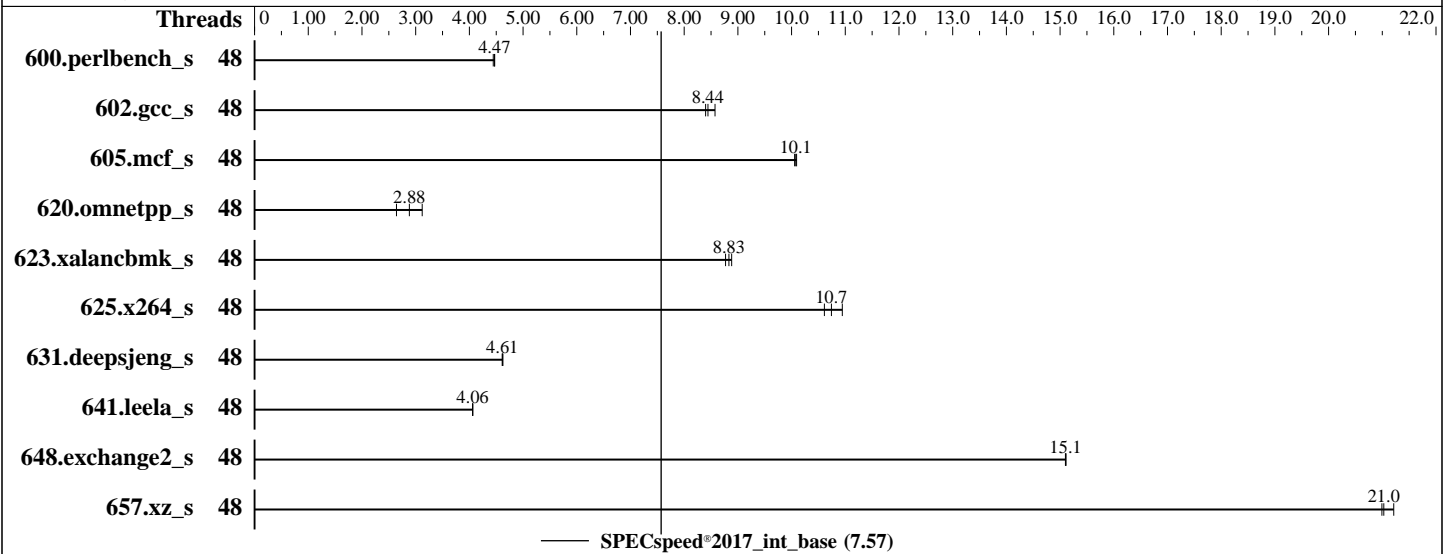

Hardware

CPU Name: AMD EPYC 7402
 Max MHz: 3350
 Nominal: 2800
 Enabled: 48 cores, 2 chips
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 128 MB I+D on chip per chip,
 16 MB shared / 3 cores
 Other: None
 Memory: 1 TB (16 x 64 GB 4Rx4 PC4-2933Y-L)
 Storage: 1 x 400 GB SAS SSD, RAID 0
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 (x86_64) SP1
 Kernel 4.12.14-195-default
 Compiler: C/C++: Version 1.3.0 of AOCC
 Fortran: Version 4.8.2 of GCC
 Parallel: Yes
 Firmware: HPE BIOS Version A40 07/20/2019 released Oct-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc: jemalloc memory allocator library v5.1.0;
 Power Management: --



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.80 GHz, AMD EPYC 7402)

SPECspeed®2017_int_base = 7.57

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2019
Hardware Availability: Oct-2019
Software Availability: Jun-2019

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	48	399	4.44	<u>397</u>	<u>4.47</u>	397	4.47							
602.gcc_s	48	<u>472</u>	<u>8.44</u>	464	8.57	474	8.40							
605.mcf_s	48	469	10.1	468	10.1	<u>468</u>	<u>10.1</u>							
620.omnetpp_s	48	<u>566</u>	<u>2.88</u>	617	2.64	523	3.12							
623.xalancbmk_s	48	162	8.77	159	8.88	<u>160</u>	<u>8.83</u>							
625.x264_s	48	161	10.9	166	10.6	<u>164</u>	<u>10.7</u>							
631.deepsjeng_s	48	311	4.61	<u>311</u>	<u>4.61</u>	310	4.62							
641.leela_s	48	<u>420</u>	<u>4.06</u>	420	4.06	420	4.06							
648.exchange2_s	48	<u>195</u>	<u>15.1</u>	195	15.1	195	15.1							
657.xz_s	48	291	21.2	294	21.0	<u>294</u>	<u>21.0</u>							

SPECspeed®2017_int_base = 7.57

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

The AOCC Fortran Plugin version 1.3.0 was used to leverage AOCC optimizers with gfortran. It is available here:
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.80 GHz, AMD EPYC 7402)

SPECspeed®2017_int_base = 7.57

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Oct-2019

Software Availability: Jun-2019

Operating System Notes (Continued)

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/amd_speed_aoccl30_naples_A_lib/64;
/home/cpu2017/amd_speed_aoccl30_naples_A_lib/32:"
OMP_DYNAMIC = "false"
OMP_PLACES = "cores"
OMP_PROC_BIND = "close"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "192M"
OMP_WAIT_POLICY = "active"
```

Binaries were compiled on a system with 2p AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Configuration

Thermal Configuration set to Maximum Cooling

SMT Mode set to Disabled

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Minimum Processor Idle Power core C-State set to C6 State

Memory Patrol Scrubbing set to Disabled

Workload Profile set to General Peak Frequency Compute

NUMA memory domains per socket set to Four memory domains per socket

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on dl385-gen10-rome-64c Thu Feb 14 08:41:16 2019

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.80 GHz, AMD EPYC 7402)

SPECspeed®2017_int_base = 7.57

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Oct-2019

Software Availability: Jun-2019

Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7402 24-Core Processor

2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 24

physical 0: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30

physical 1: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

Address sizes: 48 bits physical, 48 bits virtual

CPU(s): 48

On-line CPU(s) list: 0-47

Thread(s) per core: 1

Core(s) per socket: 24

Socket(s): 2

NUMA node(s): 8

Vendor ID: AuthenticAMD

CPU family: 23

Model: 49

Model name: AMD EPYC 7402 24-Core Processor

Stepping: 0

CPU MHz: 2800.000

CPU max MHz: 2800.0000

CPU min MHz: 1500.0000

BogoMIPS: 5589.37

Virtualization: AMD-V

L1d cache: 32K

L1i cache: 32K

L2 cache: 512K

L3 cache: 16384K

NUMA node0 CPU(s): 0-5

NUMA node1 CPU(s): 6-11

NUMA node2 CPU(s): 12-17

NUMA node3 CPU(s): 18-23

NUMA node4 CPU(s): 24-29

NUMA node5 CPU(s): 30-35

NUMA node6 CPU(s): 36-41

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.80 GHz, AMD EPYC 7402)

SPECspeed®2017_int_base = 7.57

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Oct-2019

Software Availability: Jun-2019

Platform Notes (Continued)

NUMA node7 CPU(s): 42-47

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpelgb rdtscp lm constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx fl6c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5
node 0 size: 128731 MB
node 0 free: 128599 MB
node 1 cpus: 6 7 8 9 10 11
node 1 size: 129022 MB
node 1 free: 128839 MB
node 2 cpus: 12 13 14 15 16 17
node 2 size: 128992 MB
node 2 free: 128811 MB
node 3 cpus: 18 19 20 21 22 23
node 3 size: 129010 MB
node 3 free: 128913 MB
node 4 cpus: 24 25 26 27 28 29
node 4 size: 129022 MB
node 4 free: 128921 MB
node 5 cpus: 30 31 32 33 34 35
node 5 size: 129022 MB
node 5 free: 128943 MB
node 6 cpus: 36 37 38 39 40 41
node 6 size: 129022 MB
node 6 free: 128944 MB
node 7 cpus: 42 43 44 45 46 47
node 7 size: 128811 MB
node 7 free: 128725 MB
node distances:
node  0  1  2  3  4  5  6  7
 0:  10 12 12 12 32 32 32 32
 1:  12 10 12 12 32 32 32 32
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.80 GHz, AMD EPYC 7402)

SPECspeed®2017_int_base = 7.57

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Oct-2019

Software Availability: Jun-2019

Platform Notes (Continued)

```

2: 12 12 10 12 32 32 32 32
3: 12 12 12 10 32 32 32 32
4: 32 32 32 32 10 12 12 12
5: 32 32 32 32 12 10 12 12
6: 32 32 32 32 12 12 10 12
7: 32 32 32 32 12 12 12 10

```

From /proc/meminfo

```

MemTotal:      1056393364 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/*release* /etc/*version*

```

os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"

```

uname -a:

```

Linux dl385-gen10-rome-64c 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019
(8fba516) x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2017-5754 (Meltdown):      Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional,
IBRS_FW, STIBP: disabled, RSB filling

```

run-level 3 Feb 14 08:22

SPEC is set to: /home/cpu2017

```

Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda2       btrfs    371G      96G   275G  26% /home

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE A40 07/20/2019

Memory:

16x HPE P03054-091 64 GB 4 rank 2933

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.80 GHz, AMD EPYC 7402)

SPECspeed®2017_int_base = 7.57

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Oct-2019

Software Availability: Jun-2019

Platform Notes (Continued)

16x UNKNOWN NOT AVAILABLE

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C          | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base)
          | 625.x264_s(base) 657.xz_s(base)
=====

```

```

-----
AOCCLLVMM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCCLLVMM.1.3.0.B34.2018_10_22 Release-Build#34) (based on LLVM AOCCLLVMM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin
-----

```

```

=====
C++       | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
          | 641.leela_s(base)
=====

```

```

-----
AOCCLLVMM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCCLLVMM.1.3.0.B34.2018_10_22 Release-Build#34) (based on LLVM AOCCLLVMM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin
-----

```

```

=====
Fortran   | 648.exchange2_s(base)
=====

```

```

-----
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
-----

```

Base Compiler Invocation

C benchmarks:
clang

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.80 GHz, AMD EPYC 7402)

SPECspeed®2017_int_base = 7.57

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Oct-2019

Software Availability: Jun-2019

Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -O3 -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -enable-gvn-hoist
-mllvm -function-specialize -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -ljemalloc
-lamdlibm
```

C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -O3 -march=znver1
-mllvm -unroll-threshold=100 -finline-aggressive -freemap-arrays
-mllvm -inline-threshold=1000 -mllvm -enable-vectorize-compares=false
-z muldefs -DSPEC_OPENMP -fopenmp -DUSE_OPENMP -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lamdlibm
```

Fortran benchmarks:

```
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-merge-constant
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.80 GHz, AMD EPYC 7402)

SPECspeed®2017_int_base = 7.57

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Oct-2019

Software Availability: Jun-2019

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-unroll-aggressive -Wl,-mllvm -Wl,-unroll-threshold=150
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -O3 -mavx -madox
-funroll-loops -ffast-math -fpack-arrays -z muldefs
-fplugin=dragonegg.so -specs=integrated-as.specs
-fplugin-arg-dragonegg-llvm-option=-disable-indvar-simplify
-fplugin-arg-dragonegg-llvm-option=-unroll-aggressive
-fplugin-arg-dragonegg-llvm-option=-unroll-threshold:150 -DSPEC_OPENMP
-DUSE_OPENMP -fopenmp -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc -lamdlibm -lgfortran
```

Base Other Flags

C benchmarks:

```
-Wno-return-type
```

C++ benchmarks:

```
-Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc130-flags-revA2-HPE.html>

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc130-flags-revA2-HPE.xml>

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revE.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-02-14 09:41:15-0500.

Report generated on 2019-10-02 12:03:53 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-01.